

# GP1F361T/GP1F361R

## Optical Mini-Jack for Digital Audio Equipment

### ■ Features


1. Electric and optical signal compatible design  
(Three kinds of terminals are integrated into a single unit.)
2. Compact design with small jack compatible mini-plug
3. OPIC type  
(Direct interface to microcomputer of the I/O signals)  
(High fidelity real sound reproduction)
4. High speed data transmission  
Signal transmission speed: MAX. 8Mbps  
(NRZ signal)
5. Low voltage drive (2.7V to 3.6V)

### ■ Applications

1. MD, DCC
2. Portable CD, DAT

### ■ Outline Dimensions

(Unit : mm)

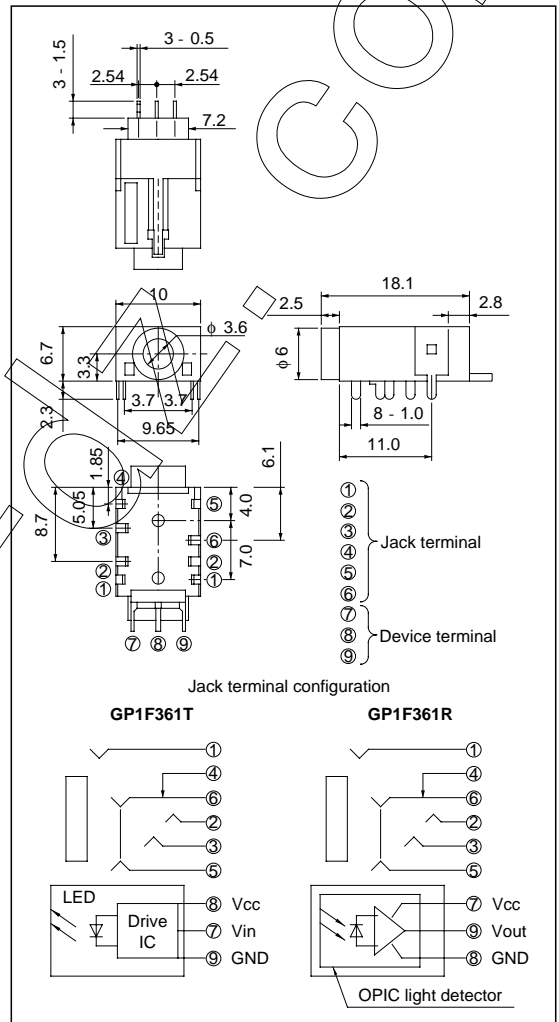

\* OPIC is a trademark of Sharp and stands for Optical IC.  
It has light detecting element and signal processing circuitry integrated single chip.

## ■ Absolute Maximum Ratings

### GP1F361T/GP1F361R (Photoelectric conversion element)

| Parameter                 | Symbol    | Rating                  | Unit |
|---------------------------|-----------|-------------------------|------|
| Supply voltage            | $V_{CC}$  | - 0.5 to + 7.0          | V    |
| Output current (GP1F361R) | $I_{OH}$  | 2 (source current)      | mA   |
|                           | $I_{OL}$  | 10 (sink current)       | mA   |
| Input voltage (GP1F361T)  | $V_{in}$  | - 0.5 to $V_{CC} + 5.0$ | V    |
| Operating temperature     | $T_{opr}$ | - 20 to + 70            | °C   |
| Storage temperature       | $T_{stg}$ | - 30 to + 80            | °C   |
| *1 Soldering temperature  | $T_{sol}$ | 260                     | °C   |

### GP1F361T/GP1F361R (Jack)

| Parameter                | Symbol    | Rating                                  | Unit |
|--------------------------|-----------|---|------|
| Total power dissipation  | $P_{tot}$ | D.C. 12V, 1A                            | -    |
| Isolation voltage        | $V_{iso}$ | A.C. 500V <sub>rms</sub><br>(For 1min.) | -    |
| Operating temperature    | $T_{opr}$ | - 20 to 70                              | °C   |
| Storage temperature      | $T_{stg}$ | - 30 to 80                              | °C   |
| *1 Soldering temperature | $T_{sol}$ | 260                                     | °C   |

\*1 5s/time up to 2 times.

## ■ Recommended Operating Conditions

### GP1F361T

| Parameter               | Symbol   | MIN. | TYP. | MAX. | Unit |
|-------------------------|----------|------|------|------|------|
| Supply voltage          | $V_{CC}$ | 2.7  | 3.0  | 3.6  | V    |
| Operating transfer rate | T        | -    | -    | 8    | Mbps |

### GP1F361R

| Parameter                          | Symbol   | MIN.   | TYP. | MAX.   | Unit |
|------------------------------------|----------|--------|------|--------|------|
| Supply voltage                     | $V_{CC}$ | 2.7    | 3.0  | 3.6    | V    |
| Operating transfer rate            | T        | 0.1    | -    | 8      | Mbps |
| Receiver input optical power level | $P_C$    | - 24.0 | -    | - 14.5 | dBm  |

## ■ Electro-optical Characteristics

### GP1F361T (Photoelectric conversion element)

( $T_a = 25^\circ\text{C}$ )

| Parameter                              | Symbol      | Conditions      | MIN. | TYP. | MAX. | Unit |
|--|-------------|-----------------|------|------|------|------|
| Peak emission wavelength               | $\lambda_P$ | -               | 630  | 660  | 690  | nm   |
| Optical power output couple with fiber | $P_C$       | Refer to Fig. 1 | - 21 | - 17 | - 15 | dBm  |
| Supply current                         | $I_{CC}$    | Refer to Fig. 2 | -    | 8    | 12   | mA   |
| High level input voltage               | $V_{IH}$    | Refer to Fig. 2 | 2.1  | -    | -    | V    |
| Low level input voltage                | $V_{IL}$    | Refer to Fig. 2 | -    | -    | 0.8  | V    |
| Low→High delay time                    | $t_{PLH}$   | Refer to Fig. 3 | -    | -    | 180  | ns   |
| High→Low delay time                    | $t_{PHL}$   | Refer to Fig. 3 | -    | -    | 180  | ns   |
| Pulse width distortion                 | $\Delta tw$ | Refer to Fig. 3 | - 30 | -    | + 30 | ns   |
| Jitter                                 | $\Delta tj$ | Refer to Fig. 3 | -    | 1    | 30   | ns   |

## GP1F361R (Photoelectric conversion element)

(Ta = 25°C)

| Parameter                   | Symbol                  | Conditions      | MIN.            | TYP. | MAX. | Unit |    |
|-----------------------------|-------------------------|-----------------|-----------------|------|------|------|----|
| Peak sensitivity wavelength | $\lambda_P$             | -               | -               | 700  | -    | nm   |    |
| Supply current              | $I_{CC}$                | Refer to Fig. 4 | -               | 12   | 15   | mA   |    |
| High level output voltage   | $V_{OH}$                | Refer to Fig. 5 | 2.1             | -    | -    | V    |    |
| Low level output voltage    | $V_{OL}$                | Refer to Fig. 5 | -               | -    | 0.4  | V    |    |
| Rise time                   | $t_r$                   | Refer to Fig. 5 | -               | 17   | 30   | ns   |    |
| Fall time                   | $t_f$                   | Refer to Fig. 5 | -               | 5    | 30   | ns   |    |
| Low→High delay time         | $t_{PLH}$               | Refer to Fig. 5 | -               | -    | 180  | ns   |    |
| High→Low delay time         | $t_{PHL}$               | Refer to Fig. 5 | -               | -    | 180  | ns   |    |
| Pulse width distortion      | $\Delta tw$             | Refer to Fig. 5 | - 30            | -    | + 30 | ns   |    |
| Jitter                      | $P_C = -14.5\text{dBm}$ | $\Delta t_j$    | Refer to Fig. 6 | -    | 1    | 30   | ns |
|                             | $P_C = -24\text{dBm}$   |                 |                 | -    | -    | 30   | ns |

## ■ Mechanical and Electrical Characteristics

## GP1F361T/GP1F361R (Jack)

| Parameter                            | Symbol    | Conditions          | MIN. | TYP. | MAX. | Unit       |
|--------------------------------------|-----------|---------------------|------|------|------|------------|
| Insertion force,<br>Withdrawal force | $F_P$     | *2                  | 5    | -    | 35   | N          |
| Contact resistance                   | $R_{con}$ | *3                  | -    | -    | 30   | m $\Omega$ |
| Isolation resistance                 | $R_{ISO}$ | D.C. 500V,<br>1min. | 100  | -    | -    | M $\Omega$ |

(Note) This jack is designed for applicable to  $\phi$  3.5 compact single head plug (EIAJ RC-6701A).


\*2 Measuring method of insertion force and withdrawal force.

Insertion and withdrawal force shall be measured after inserting and withdrawing 3 times by using EIAJ RC-6701A standard plug for test.

\*3 Measuring method of contact resistance.

About movable contact terminal and make contacts, it measures at 100mA or less and 1000Hz at the condition of inserting EIAJ 6701A standard plug for test.

### Fig. 1 Measuring Method Optical Output Coupling Fiber

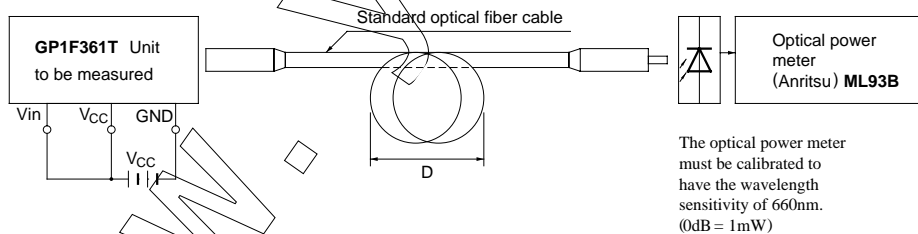


(Note) (1)  $V_{CC}$  :  $3.0V \pm 0.05V$  (State of operating)

(2) To bundle up the standard fiber optic cable, make it into a loop with the diameter  $D = 10\text{cm}$  or more.

(The standard fiber optic cable will be specified elsewhere)

Fig. 2 Measuring Method of Input Voltage and Supply Current


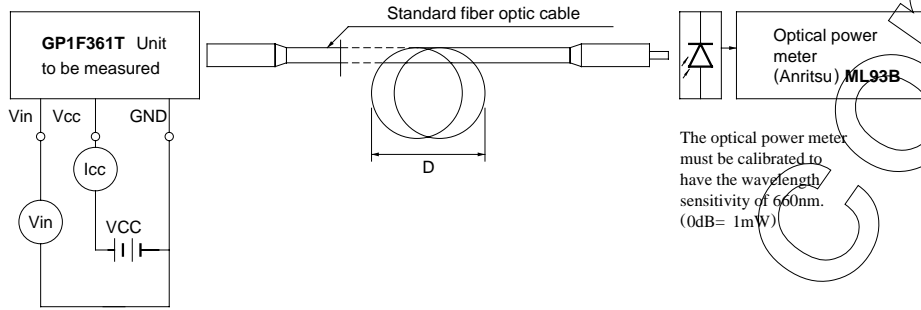


Input conditions and judgement method

| Conditions              | Judgement method  |
|-------------------------|---|
| $V_{in} = 2.1V$ or more | $-21 \leq P_c \leq -15dBm$ , $I_{cc} \leq 12mA$ or less |
| $V_{in} = 0.8V$ or less | $P_c \leq -36dBm$ , $I_{cc} = 12mA$ or less             |

Note)  $V_{CC} = 3.0 \pm 0.05V$  (State of operating)

Fig. 3 Measuring Method of Pulse Response and Jitter

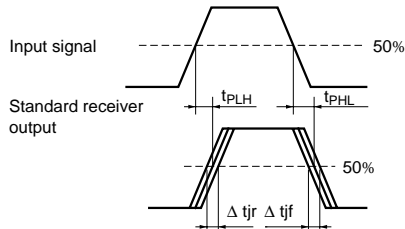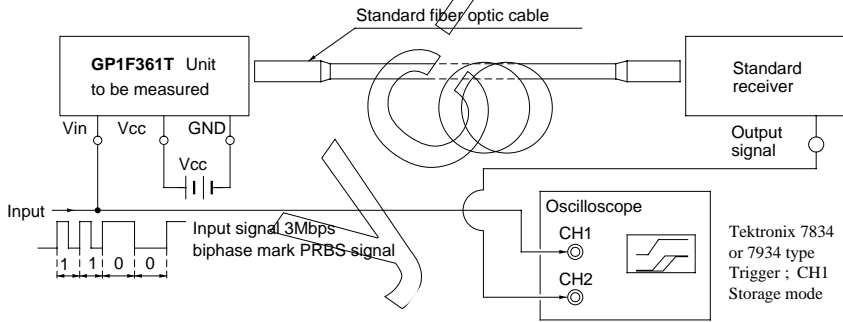


Test item

| Test item                 | Symbol          | Test condition  |
|---------------------------|-----------------|---|
| Low→High pulse delay time | $t_{PLH}$       | -   |
| High→Low pulse delay time | $t_{PHL}$       | -   |
| Pulse width distortion    | $\Delta tw$     | $\Delta tw = t_{PHL} - t_{PLH}$   |
| Low→High Jitter           | $\Delta t_{jr}$ | Set the trigger on the rise of input signal to measure the jitter of the rise of output |
| High→Low Jitter           | $\Delta t_{jf}$ | Set the trigger on the fall of input signal to measure the jitter of the fall of output |


- Notes (1) The waveform write time shall be 4 seconds. But do not allow the waveform to be distorted by increasing the brightness too much.  
 (2)  $V_{CC} = 3.0 \pm 0.05V$  (State of operating)  
 (3) The probe for the oscilloscope must be more than  $1M\Omega$  and less than  $10pF$ .

**Fig. 4 Supply Current**

| Input conditions   | Measuring method                                |
|--|---|
| Supply voltage<br>$V_{CC} = 3.0 \pm 0.05V$   | Measured on an ammeter<br>(DC average amperage) |
| Optical output coupling fiber<br>$P_c = -14.5dBm$  |   |
| Standard transmitter input signal<br>6Mbps NRZ, Duty50% or 3Mbps biphas mark PRBS signal |   |

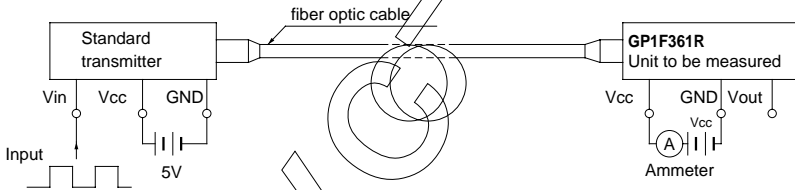


**Fig. 5 Measuring Method of Output Voltage and Pulse Response**

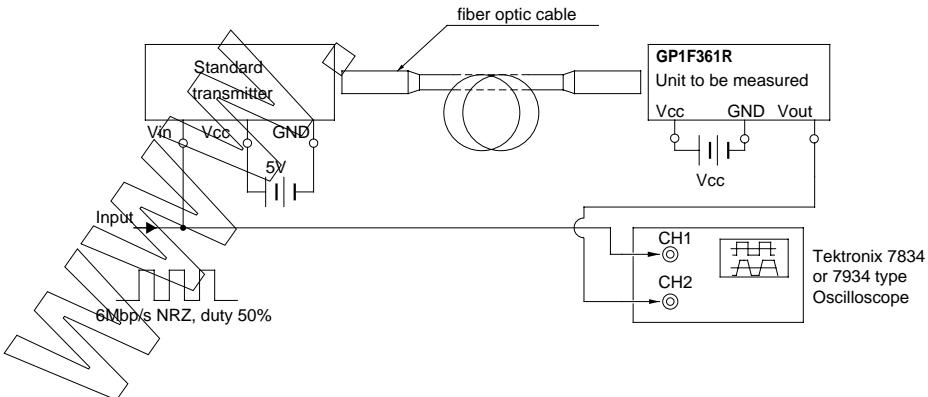



Test item

| Test item   | Symbol      |
|---|-------------|
| Low→High pulse delay time                                 | $t_{PLH}$   |
| High→Low pulse delay time                                 | $t_{PHL}$   |
| Rise time   | $t_r$       |
| Fall time   | $t_f$       |
| Pulse width distortion<br>$\Delta tw = t_{PHL} - t_{PLH}$ | $\Delta tw$ |
| High level output voltage                                 | $V_{OH}$    |
| Low level output voltage                                  | $V_{OL}$    |

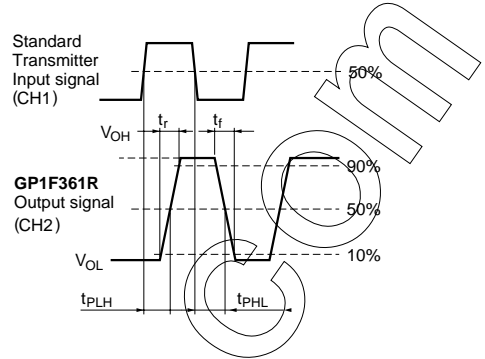

- Notes
- (1)  $V_{CC} = 3.0 \pm 0.05V$  (State of operating)
  - (2) The fiber coupling light output set at  $-14.5dBm / -24.0dBm$ .
  - (3) The probe for the oscilloscope must be more than  $1M\Omega$  and less than  $10pF$ .
  - (4) The output (H/L level) of **GP1F361R** are not fixed constantly when it receives the disturbing light (including DC light, no input light) less than  $0.1Mbps$ .

Fig. 6 Measuring Method of Jitter

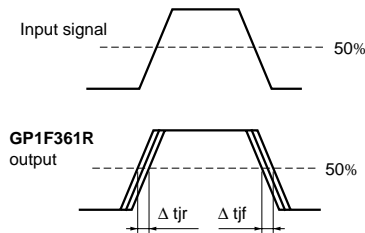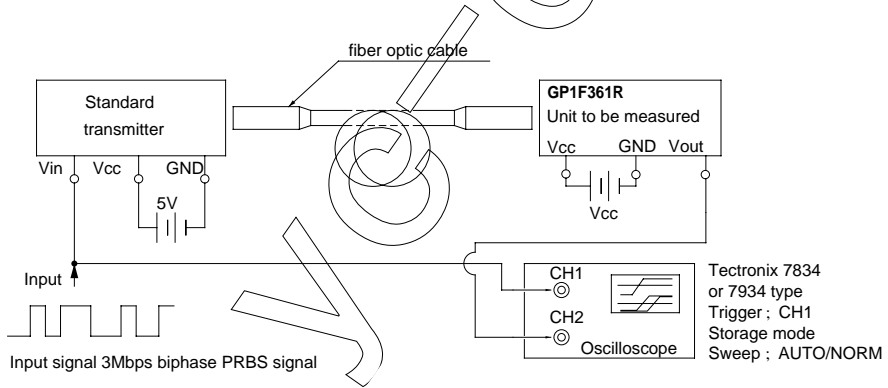


Test item

| Test item        | Symbol          | Test condition  |
|------------------|-----------------|---|
| Low→ High jitter | $\Delta t_{jr}$ | Set the trigger on the rise of input signal to measure the jitter of the rise of output |
| High→ Low jitter | $\Delta t_{jf}$ | Set the trigger on the fall of input signal to measure the jitter of the fall of output |

- Notes (1) The fiber coupling light output set at - 14.5dBm/ - 24.0dBm.  
 (2) The waveform write time shall be 3 seconds. But do not allow the waveform to be distorted by increasing the brightness too much.  
 (3)  $V_{CC} = 3.0 \pm 0.05V$  (State of operating)  
 (4) The probe for the oscilloscope must be more than  $1M\Omega$  and less than  $10pF$ .

■ Optical Mini-Jack Connection Example

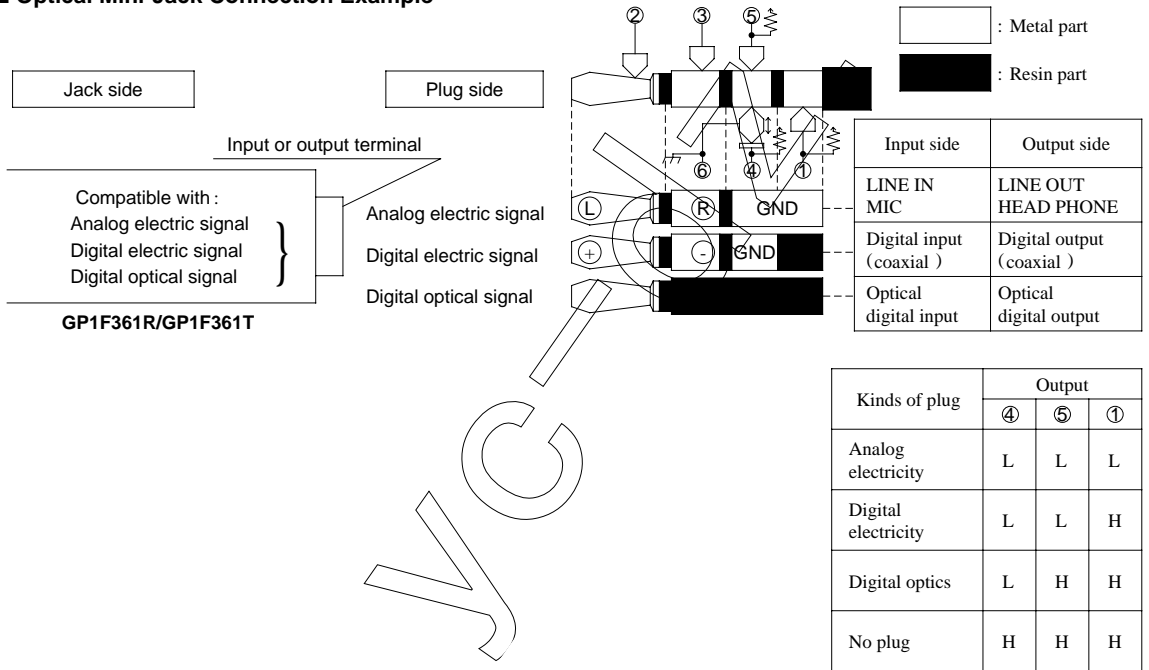

● Please refer to the chapter “Precautions for Use.”

### NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet not meet the following conditions:
  - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
    - Personal computers
    - Office automation equipment
    - Telecommunication equipment [terminal]
    - Test and measurement equipment
    - Industrial control
    - Audio visual equipment
    - Consumer electronics
  - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
    - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
    - Traffic signals
    - Gas leakage sensor breakers
    - Alarm equipment
    - Various safety devices, etc.
  - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
    - Space applications
    - Telecommunication equipment [trunk lines]
    - Nuclear power control equipment
    - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.