



Electrical Specification @25°C

Part Number	Schematic	Impedance Ratio	Frequency Bandwidth (MHz)	PIN1-3		PIN6-4	
				OCL uH (Min)	DCR ohm (Max)	OCL uH (Min)	DCR ohm (Max)
HR600601	(1)	1:1	0.005 ~ 100	780	0.320	780	0.320
HR600602	(1)	1:1	0.04 ~ 175	95	0.200	95	0.200
HR600603	(1)	1.5:1	0.1 ~ 150	80	0.145	51	0.130
HR600604	(1)	4:1	0.2 ~ 300	95	0.160	25	0.115
HR600605	(2)	1:1	0.005 ~ 100	780	0.320	780	0.320
HR600606	(2)	1:1	0.04 ~ 175	95	0.200	95	0.200
HR600607	(2)	4:1	0.2 ~ 300	95	0.160	25	0.115
HR600608	(3)	1:1	0.005 ~ 100	780	0.320	780	0.320
HR600609	(4)	1:1	0.04 ~ 175	95	0.200	95	0.200
HR600610	(5)	1.5:1	0.1 ~ 150	80	0.145	51	0.130
HR600611	(6)	4:1	0.2 ~ 300	95	0.160	25	0.115

Schematics

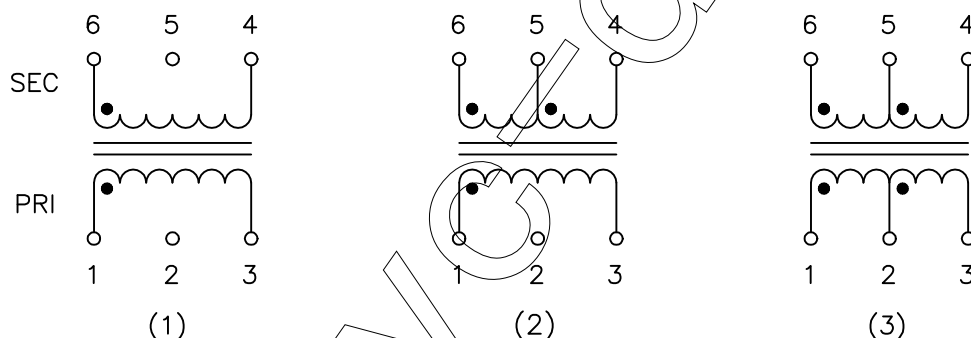

Mechanical Dimensions

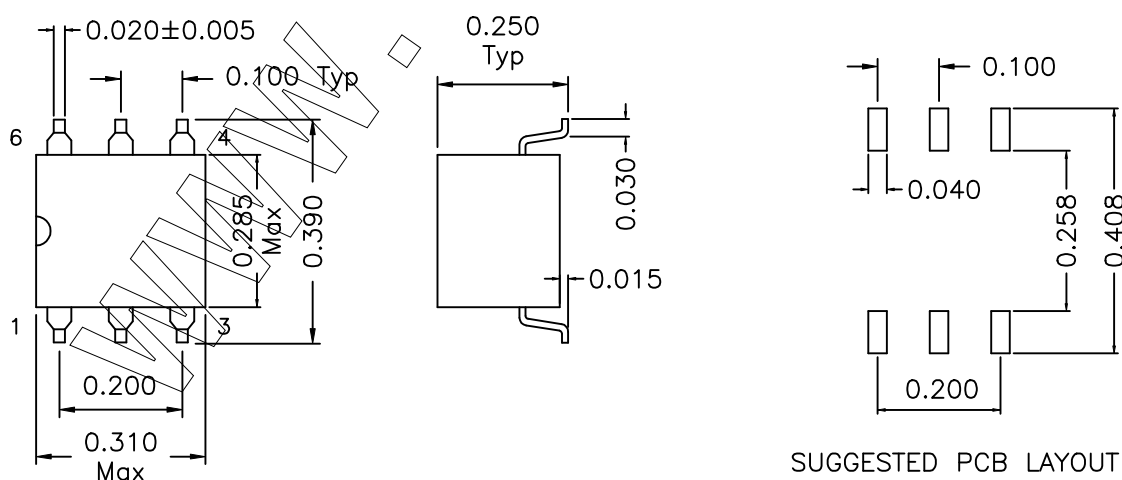

Part No.:	Unless otherwise specified, Tol.: .xxx ±0.010	Rev: A	DRWN:	Date:
Dimensions in inches		Page 1/1	APPD:	Date:

Tel: (0760) 2121067 2121679 • Fax: (0760) 2121065 • E-Mail: hanrun@pub.zhongshan.gd.cn • http: www.hanrun.com