


# Pyroelectric Detector LHi 814


## Dual channel single element configuration including two optical windows

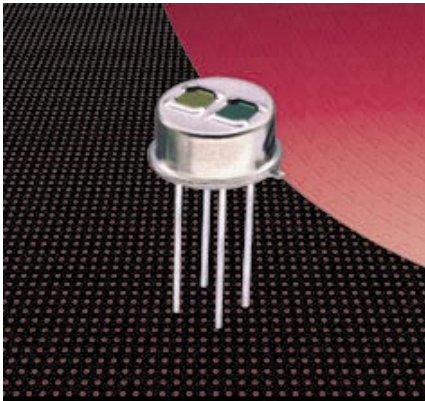


Special Design for Gas Absorption Detection Applications

The **LHi 814** pyroelectric infrared-detector series is specially designed for gas analysis and monitoring applications. It includes two pyroelectric elements, each having a FET in source follower connection. Thus two outputs are given.


The detector is encapsulated into **TO-5** housing with two separated spectral narrow band infrared windows. There are many filters available for the selected spectral bandwidths. Often one channel is used as reference channel.



Field of View

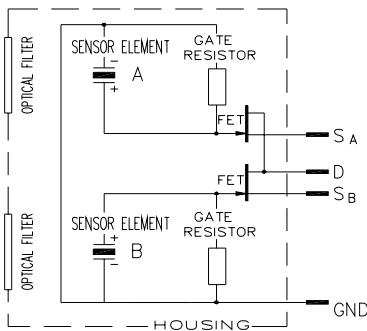

Parameters	LHi 814			units	condition
	min	typical	max		
<b>Element size</b>	1,5x1,5			mm <sup>2</sup>	
<b>Responsivity</b>	500	640		V/W	1Hz Bw, 100°C, 10 Hz
<b>Noise</b>	600	1200		nV <sub>RMS</sub>	25°C, 10Hz
<b>Offset Voltage</b>	0,2	1,5		V	R <sub>S</sub> =47kΩ, 25°C
<b>NEP</b>	9,4x10 <sup>-10</sup>	24x10 <sup>-10</sup>		W √Hz	1Hz Bw, 100°C, 1 Hz
<b>D*</b>	6x10 <sup>7</sup>	16x10 <sup>7</sup>		cm √Hz/W	1Hz Bw, 100°C, 1 Hz
<b>Output Impedance</b>	5	10		kΩ	R <sub>S</sub> =47kΩ, 25°C
<b>Operating Voltage</b>	2	15		V	R <sub>S</sub> =47kΩ, 25°C
<b>Field of View, horizontal</b>	77°				unobstructed
<b>vertical</b>	95°				unobstructed
<b>Operating Temp.</b>	-40	85		°C	non permanent
<b>Storage Temperature</b>	-40	85		°C	non permanent

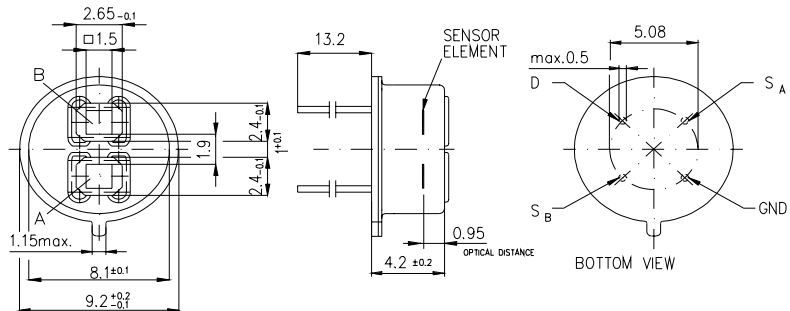

Europe:  
**PerkinElmer** Optoelectronics  
 GmbH & CoKG  
 Wenzel Jaksch Str 31  
 65199 Wiesbaden / Germany  
 Phone +49(0)611 492 0  
 Fax +49(0)611 492 170

USA:  
**PerkinElmer** Optoelectronics  
 44370 Christy Street  
 Fremont, CA 94538-3180  
 Phone +510 979 6500  
 +800 775 6786  
 Fax +510 687 1140

Asia: Dimensions in mm  
**PerkinElmer** Optoelectronics  
 47, Ayer Rajah Crescent #06-12  
 Singapore 139947  
 Phone +65 775 2022  
 Fax +65 775 1008



Right for modification reserved / WS / 28.8.2003