


FEATURES

- * HIGH SPEED
- * HIGH POWER
- * AVAILABLE FOR PULSE OPERATING

PACKAGE DIMENSIONS

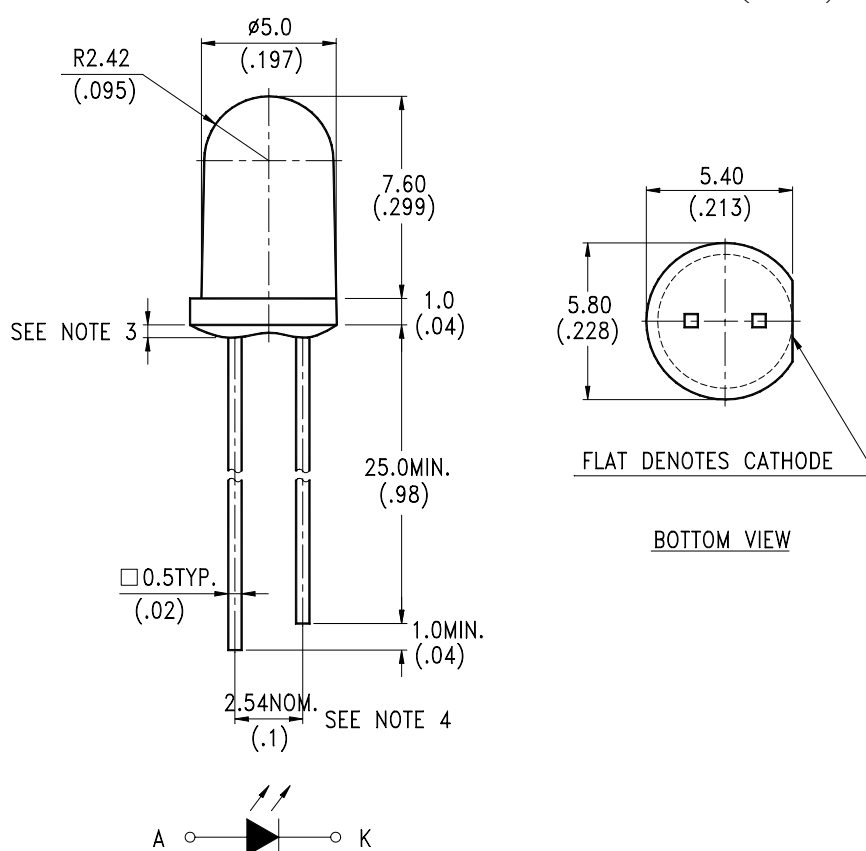

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise noted.
3. Protruded resin under flange is $1.5\text{mm}(.059")$ max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.

ABSOLUTE MAXIMUM RATINGS AT TA=25°C

PARAMETER	MAXIMUM RATING	UNIT
Power Dissipation	200	mW
Peak Forward Current (300pps, 10 μ s pulse)	1	A
Continuous Forward Current	80	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to + 85°C	
Storage Temperature Range	-55°C to + 100°C	
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds	

ELECTRICAL OPTICAL CHARACTERISTICS AT TA=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Radiant Intensity	I_E	30	45		mW/sr	$I_F = 50\text{mA}$
Peak Emission Wavelength	λ_{Peak}		850		nm	$I_F = 50\text{mA}$
Spectral Line Half-Width	$\Delta \lambda$		50		nm	$I_F = 50\text{mA}$
Forward Voltage	V_F		1.6	2.0	V	$I_F = 50\text{mA}$
Reverse Current	I_R			100	μ A	$V_R = 5\text{V}$
Rise/Fall Time	T_r/T_f		30		nS	10%~90%
Viewing Angle (See FIG.6)	$2\theta_{1/2}$		30		deg.	

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

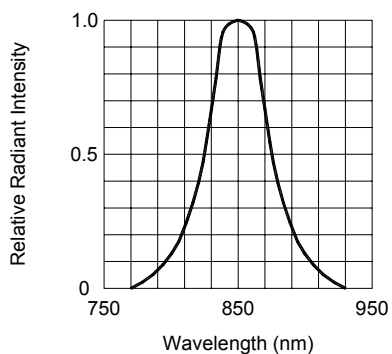


FIG.1 SPECTRAL DISTRIBUTION

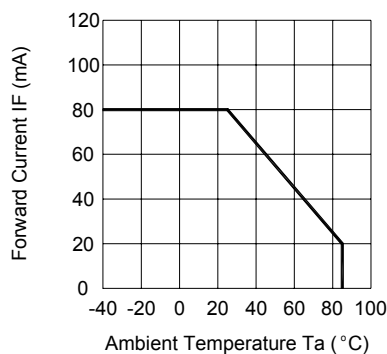


FIG.2 FORWARD CURRENT VS. AMBIENT TEMPERATURE

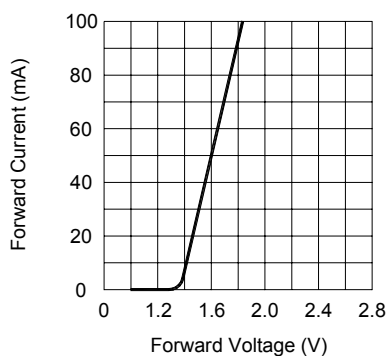


FIG.3 FORWARD CURRENT VS. FORWARD VOLTAGE

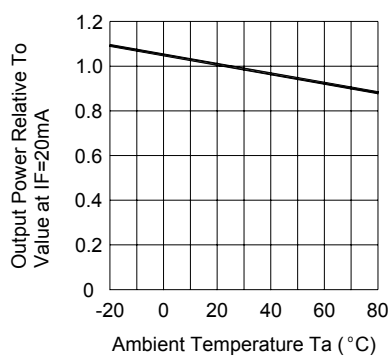


FIG.4 RELATIVE RADIANT INTENSITY VS. AMBIENT TEMPERATURE

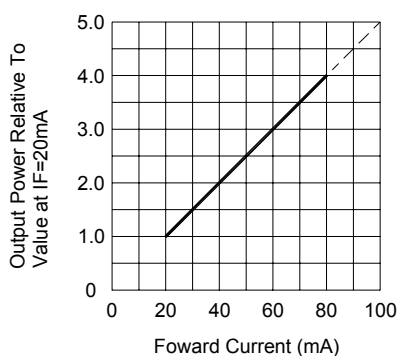


FIG.5 RELATIVE RADIANT INTENSITY VS. FORWARD CURRENT

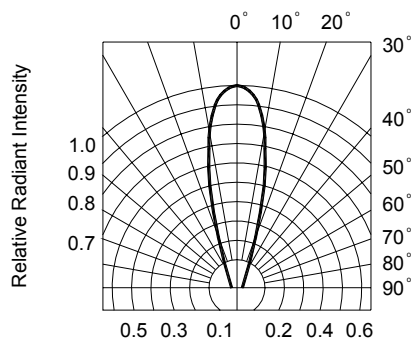


FIG.6 RADIATION DIAGRAM

PACKING

LITEON

LITE-ON TECHNOLOGY CORP.

CUSTOMER: _____


DEVICE TYPE: LTE-3376_____

BIN GRADE: _____


LOT NO.: _____

Q'TY: _____


RMK: _____



BAG




CUSTOMER : _____
 CUSTOMER P/N : _____
 DEVICE TYPE : LTE-3376
 BIN : _____
 COLOR RANK : _____
 QUANTITY : _____
 Q. C STAMP : _____

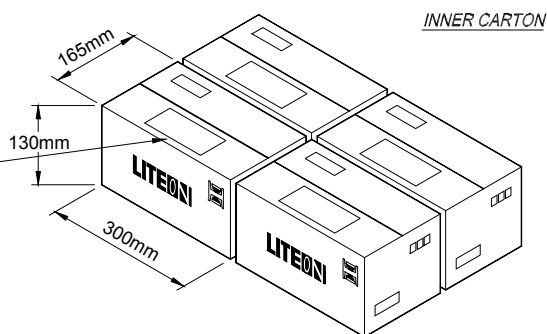

INNER CARTON



DIVICE NO.	BIN	QUANTITY
LTE-3376		
Q.C STAMP		

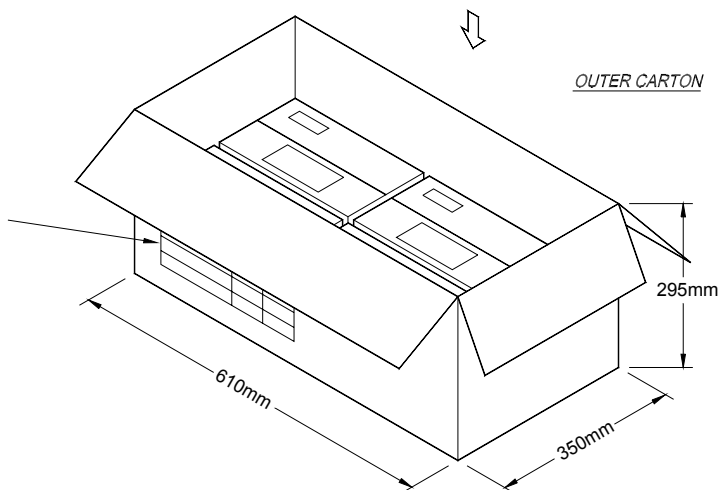

OUTER CARTON

Bag volume (pcs / Bag)	Inner carton volume (Bag / carton)	Outer carton volume (Box / Carton)	Total volume (pcs/outer carton)
1000	8	8	64000