



5mm Low Profile Photo Darlington-Transistor

MODEL NO : PDT323B-5

■ Features :

- Extra high radiant sensitivity
- Very low temperature drift
- Suitable for near infrared radiation
- High sensitivity

■ Description :

- PDT323B-5 is an extra high sensitive monolithic silicon epitaxial planar Darlington phototransistor.

■ Applications :


- Any applications requiring high sensitivity at low light level
- Special light barriers and switch
- VCR ,Video camera
- Floppy disk drive
- Optoelectronic switch

PART NO.	CHIP	LENS COLOR
	MATERIAL	
PDT	Silicon	Black

5mm Low Profile Photo Darlington-Transistor

MODEL NO : PDT323B-5

Package Dimensions :

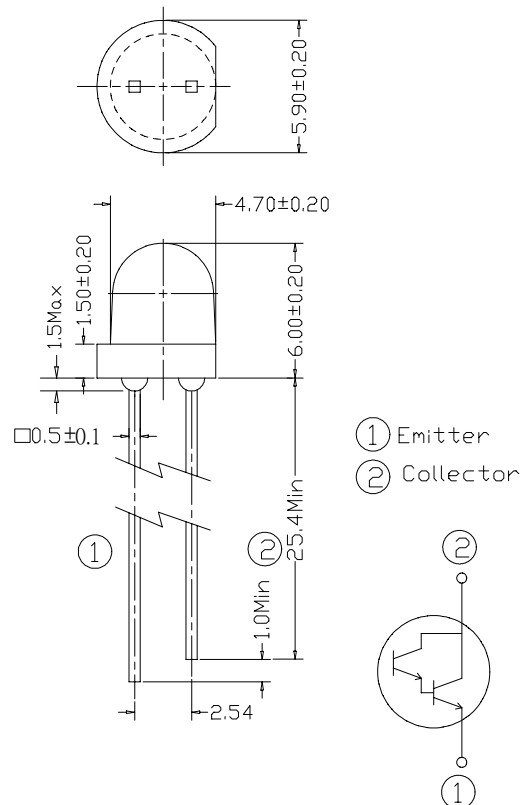

Notes :

- 1.All dimensions are in millimeter.
- 2.Protruded resin under flange 1.5 mm Max.
- 3.Lead spacing is measured where the lead emerge from the package.
- 4.Lens color : Black.
- 5.Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 6.These specification sheets include materials protected under copyright of EVERLIGHT corporation . Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 7.When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.



5mm Low Profile Photo Darlington-Transistor

MODEL NO : PDT323B-5

■ Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit	Notice
Collector-Emitter Voltage	V_{CEO}	30	V	
Emitter-Collector- Voltage	V_{ECO}	5	V	
Collector Current	I_C	20	mA	
Operating Temperature	T_{opr}	$-25 \sim +85$	$^\circ\text{C}$	
Storage Temperature	T_{stg}	$-40 \sim +85$	$^\circ\text{C}$	
Soldering Temperature	T_{sol}	260	$^\circ\text{C}$	4mm from mold body less than 5 seconds
Power Dissipation at(or below) 25°C Free Air Temperature	P_C	75	mW	

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Collector-Emitter Breakdown Voltage	BV_{CEO}	15	----	----	V	$I_C=100\mu\text{A}$ $E_e=0\text{mW}/\text{cm}^2$
Emitter-Collector Breakdown Voltage	BV_{ECO}	5	----	----	V	$I_E=10\mu\text{A}$ $E_e=0\text{mW}/\text{cm}^2$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	----	----	1.0	V	$I_C=15\text{mA}$ $E_e=1\text{mW}/\text{cm}^2$
Rise Time	t_r	----	40	----	μS	$V_{CE}=5\text{V}$ $I_C=10\text{mA}$ $R_L=100\Omega$
Fall Time	t_f	----	60	----		
Collector Dark Current	I_{CEO}	----	----	1000	nA	$V_{CE}=10\text{V}$ $E_e=0\text{mW}/\text{cm}^2$
On State Collector Current	$I_{C(on)}$	3.3	4.0	----	mA	$V_{CE}=5\text{V}$ $E_e=1\text{mW}/\text{cm}^2$
Wavelength of Peak Sensitivity	λ_p	----	980	----	nm	----
Rang of Spectral Bandwidth	$\lambda_{0.5}$	----	840---1200	----	nm	----



5mm Low Profile Photo Darlington-Transistor

MODEL NO : PDT323B-5

Typical Electrical/Optical/Characteristics Curves

Fig.1 Collector Power Dissipation vs. Ambient Temperature




Fig.2 Collector Dark Current vs. Ambient Temperature

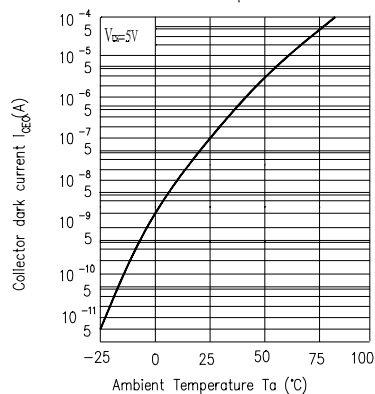


Fig. 3 Relative Collector Current vs. Ambient Temperature

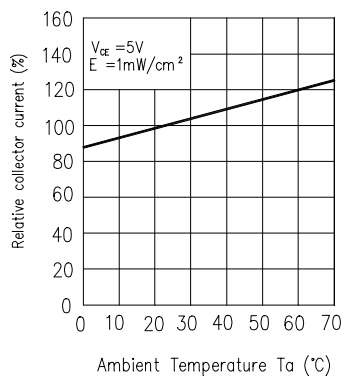


Fig.4 Collector Current vs. Irradiance

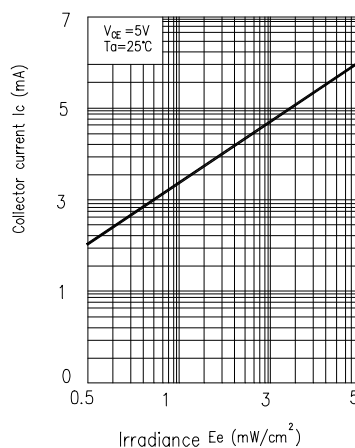


Fig.5 Spectral Sensitivity


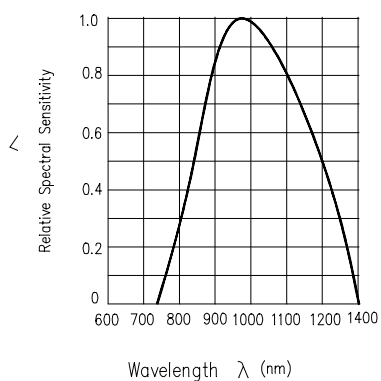


Fig.6 Collector Current vs. Collector-emitter Voltage





EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DPT-032-022REV : 1.1

ECN : _____

PAGE : 5/7

5mm Low Profile Photo Darlington-Transistor

MODEL NO : PDT323B-5

■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycles	Sample Size	Failure Judgement Criteria	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 secs	22 pcs	$I_{c(on)} \leq L \times 0.8$ L :Lower specification limit	0/1
2	Temperature Cycle	H : +85°C 30 mins 5 mins L : -55°C 30 mins	50 cycles	22 pcs		0/1
3	Thermal Shock	H : +100°C 5 mins 10 secs L : -10°C 5 mins	50 cycles	22 pcs		0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 pcs		0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 hrs	22 pcs		0/1
6	DC Operating Life	V _{CE} =5V	1000 hrs	22 pcs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 pcs		0/1



DEVICE NUMBER : DPT-032-022
ECN : _____

REV : 1.1
PAGE : 6/7

5mm Low Profile Photo Darlington-Transistor

MODEL NO : PDT323B-5


Test Method For On State Collector Current :

Condition : $E_e=1\text{mW}/\text{cm}^2$, $V_{CE}=5\text{V}$

Test Item : Collector Current [$I_{C(on)}$]

Unit : mA

COM

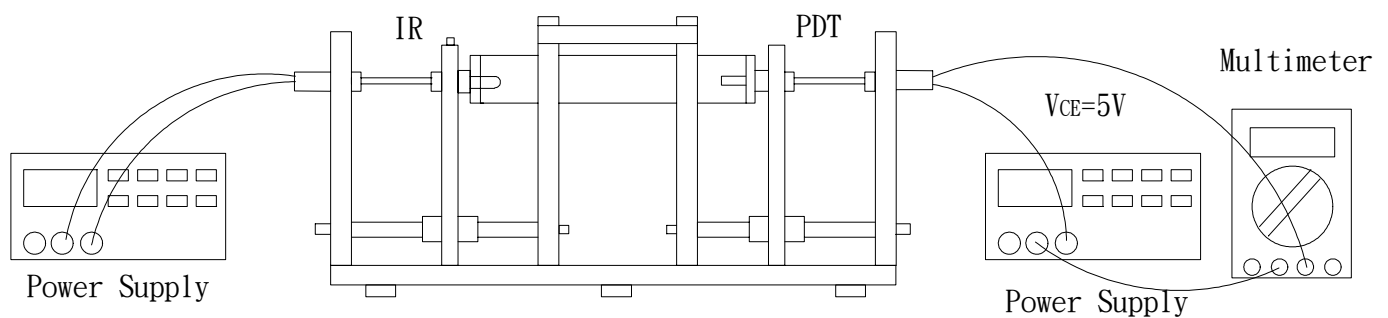

WWW.EVERLIGHT.COM



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DPT-032-022

REV : 1.1


ECN : _____

PAGE : 7/7

5mm Low Profile Photo Darlington-Transistor

MODEL NO : PDT323B-5

■ Packing Specifications

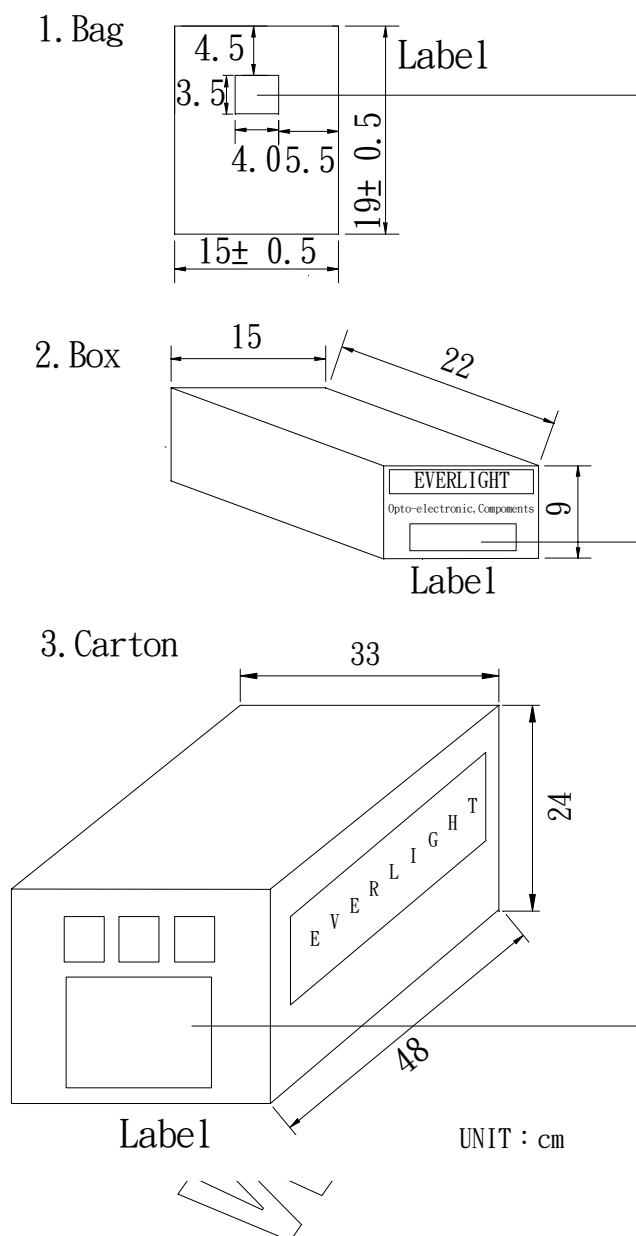

CPN:

P/N:

PDT323B-5

QTY:

LOT NO:

CAT:

HUE:

REF:

MADE IN TAIWAN

CPN : Customer's Production Number

P/N : Production Number

QTY : Packing Quantity

CAT : Ranks

HUE : Peak Wavelength

REF : Reference

LOT NO : Lot Number

MADE IN TAIWAN : Production place

■ Packing Quantity Specification

1. 500 Pcs/1Bag , 6 Bags/1Box

2. 10 Boxes/1Carton