

## Request For Quotation

Order the parts you need from our real-time inventory database. Simply complete a request for quotation form with your part information and a sales representative will respond to you with price and availability.

[Request For Quotation](#)

**Your free datasheet starts on the next page.**

More datasheets and data books are available from our homepage: <http://www.datasheetarchive.com>

# GP1L50/GP1L51 GP1L52V/GP1L54


## High Sensitivity Photointerrupter


### ■ Features

1. High sensing accuracy (Slit width: 0.5mm)
2. High current transfer ratio  
(CTR: MIN. 50% at  $I_F = 1\text{mA}$ )
3. Both-sides mounting type: **GP1L50** (Case height: 10mm)  
Either-side mounting type: **GP1L51** (Case height: 10mm)  
PWB direct mounting type: **GP1L52V** (Case height: 10mm)  
PWB direct mounting type: **GP1L54** (Case height: 8mm)

### ■ Outline Dimensions

(Unit : mm)

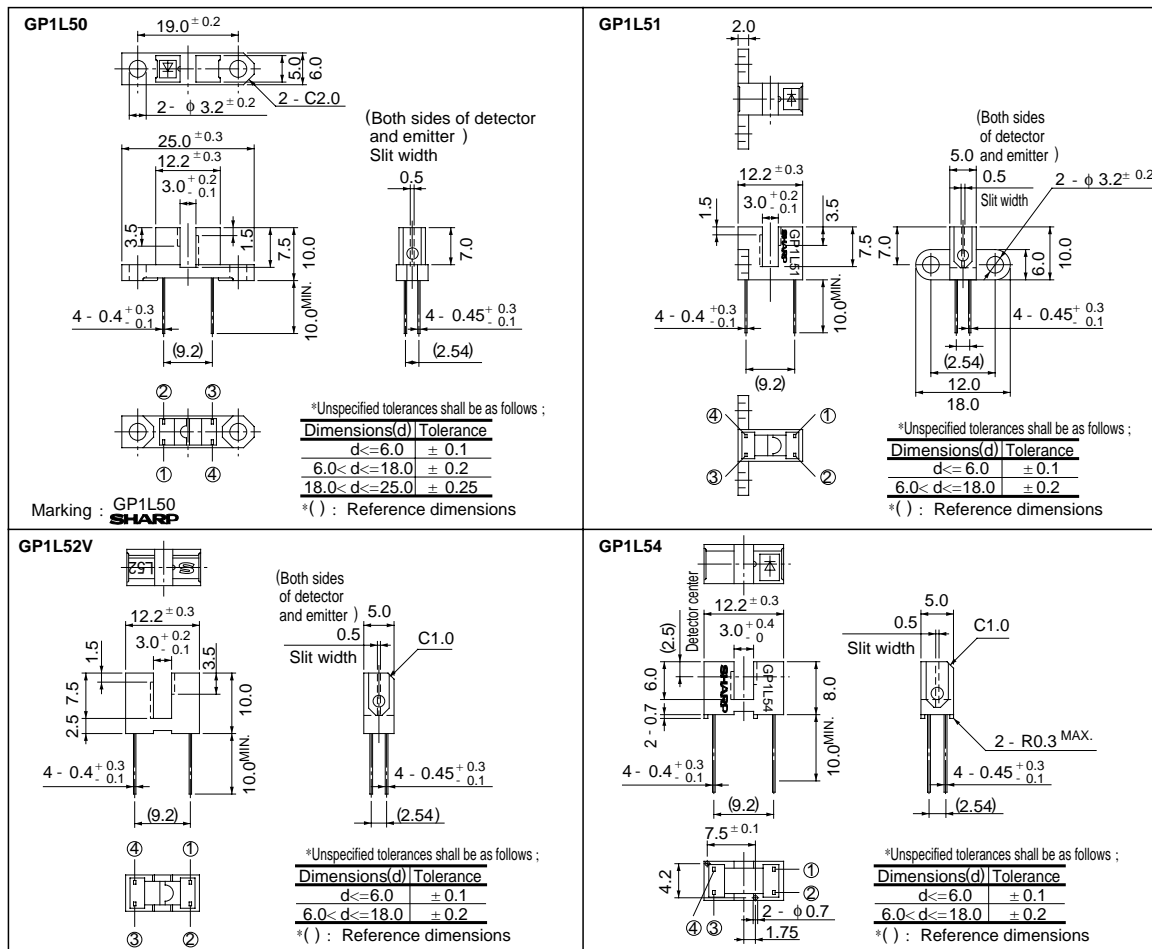

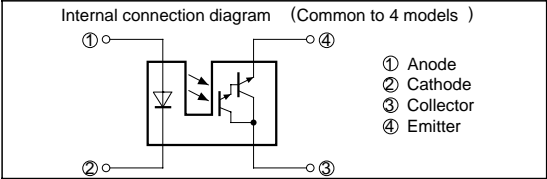

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	IF	50	mA
	*1Peak forward current	IFM	1	A
	Reverse voltage	VR	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	VCEO	35	V
	Emitter-collector voltage	VECO	6	V
	Collector current	IC	40	mA
	Collector power dissipation	PC	75	mW
Operating temperature		Topr	- 25 to + 85	°C
Storage temperature		Tstg	- 40 to + 100	°C
*2Soldering temperature		Tsol	260	°C

\*1 Pulse width<= 100 μs, Duty ratio= 0.01

\*2 For 5 seconds

■ Electro-optical Characteristics

(Ta = 25°C)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage		V <sub>F</sub>	I <sub>F</sub> = 20mA	-	1.25	1.4	V
	Peak forward voltage		V <sub>FM</sub>	I <sub>FM</sub> = 0.5A	-	3	4	V
	Reverse current		I <sub>R</sub>	V <sub>R</sub> = 3V	-	-	10	μ A
Output	Collector dark current		I <sub>CEO</sub>	V <sub>CE</sub> = 10V	-	-	10 <sup>- 6</sup>	A
Transfer charac- teristics	Collector Current		I <sub>c</sub>	I <sub>F</sub> = 1mA, V <sub>CE</sub> = 2V	0.5	-	20	mA
	Collector-emitter saturation voltage		V <sub>CE(sat)</sub>	I <sub>F</sub> = 2mA, I <sub>C</sub> = 0.5mA	-	-	1.0	V
	Response time	Rise time	t <sub>r</sub>	V <sub>CE</sub> = 2V, I <sub>C</sub> = 2mA	-	80	400	μs
		Fall time	t <sub>f</sub>		-	70	300	μs
				R <sub>L</sub> = 100Ω				

Fig. 1 Forward Current vs. Ambient Temperature



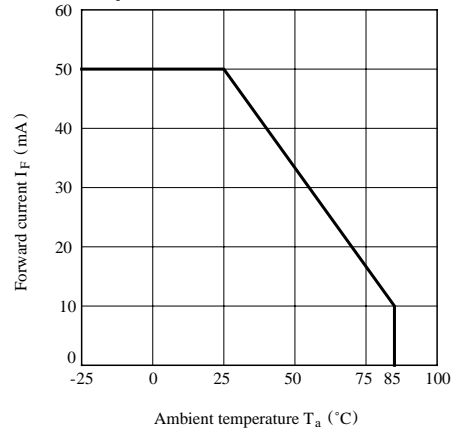



Fig. 2 Collector Power Dissipation vs. Ambient Temperature

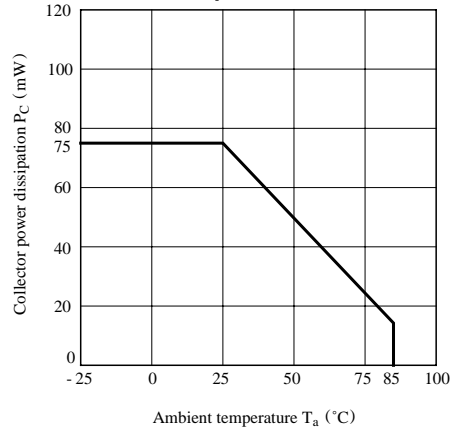


**Fig. 3 Peak Forward Current vs. Duty Ratio**

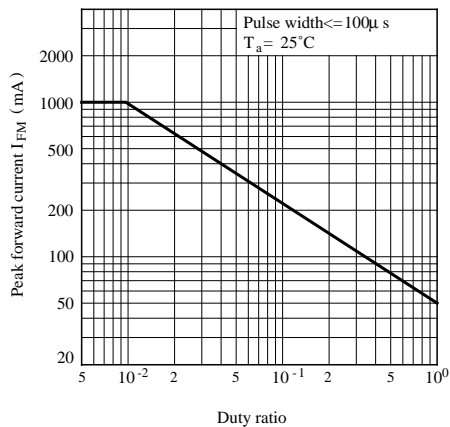


**Fig. 4 Forward Current vs. Forward Voltage**

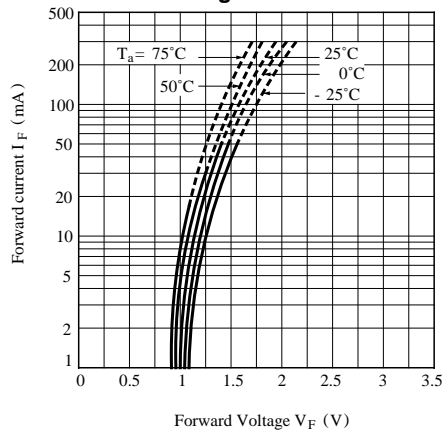


**Fig. 5 Collector Current vs. Forward Current**

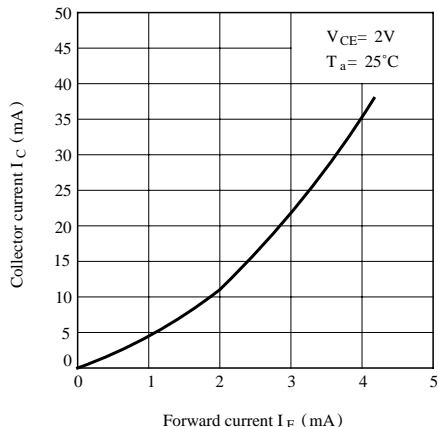

**Fig. 6 Collector Current vs. Collector-emitter Voltage**

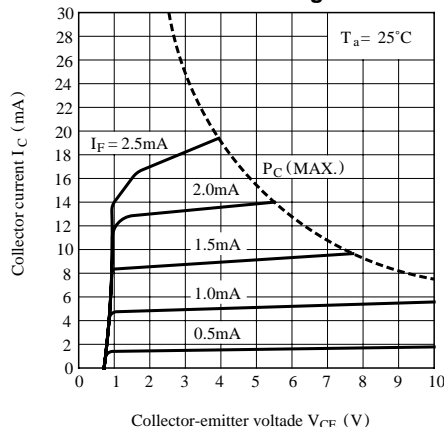

**Fig. 7 Collector Current vs. Ambient Temperature**

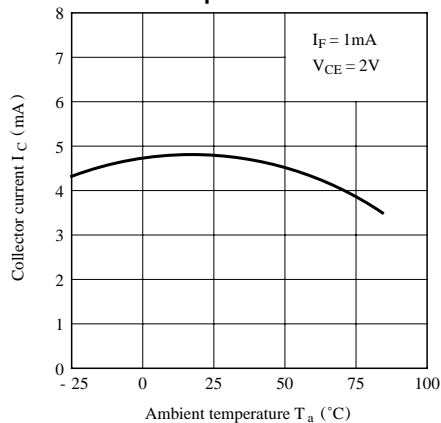

**Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**


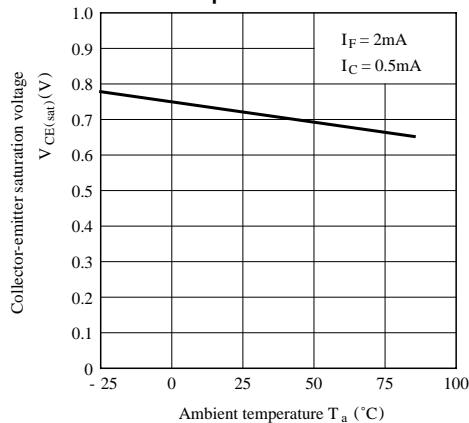


Fig. 9 Response Time vs. Load Resistance

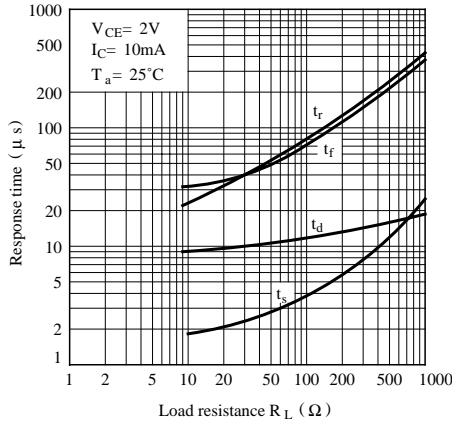

Test Circuit for Response Time

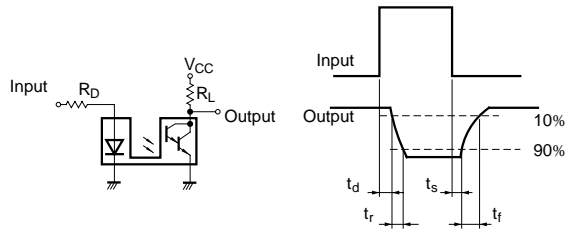


Fig.10 Frequency Response

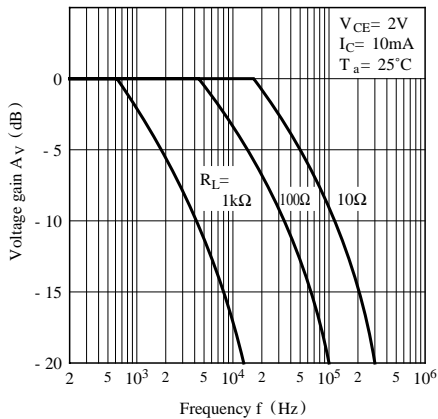


Fig.11 Collector Dark Current vs. Ambient Temperature

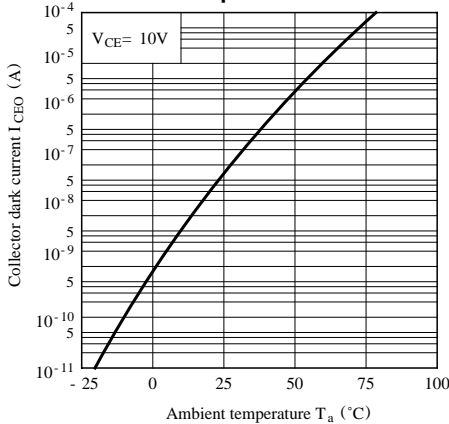


Fig.12 Relative Collector Current vs. Shield Distance (1)


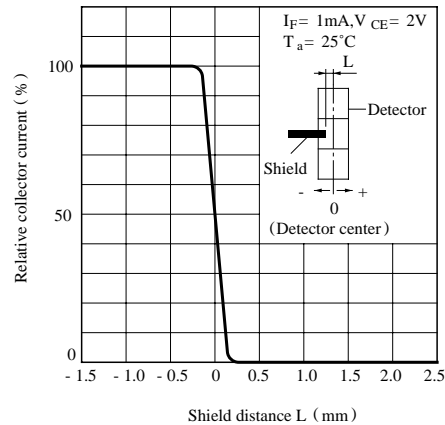


Fig. 13 Relative Collector Current vs. Shield Distance (2)

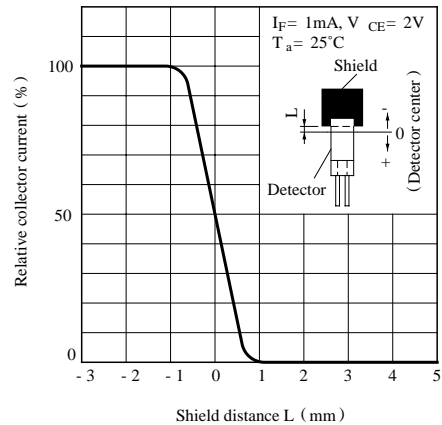

**■ Precautions for Use**

- (1) In case of cleaning, use only the following type of cleaning solvent.  
Ethyl alcohol, Methyl alcohol, Isopropyl alcohol
- (2) As for other general cautions, refer to the chapter“Precautions for Use”.

### NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
  - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
    - Personal computers
    - Office automation equipment
    - Telecommunication equipment [terminal]
    - Test and measurement equipment
    - Industrial control
    - Audio visual equipment
    - Consumer electronics
  - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
    - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
    - Traffic signals
    - Gas leakage sensor breakers
    - Alarm equipment
    - Various safety devices, etc.
  - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
    - Space applications
    - Telecommunication equipment [trunk lines]
    - Nuclear power control equipment
    - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.