


Description

The MIM-5xx9H7 is miniaturized infrared receivers for remote control and other applications requiring improved ambient light rejection. The separate PIN diode and preamplifier IC are assembled on a single leadframe. The epoxy package contains a special IR filter. This module has excellent performance even in disturbed ambient light applications and provides protection against uncontrolled output pulses.

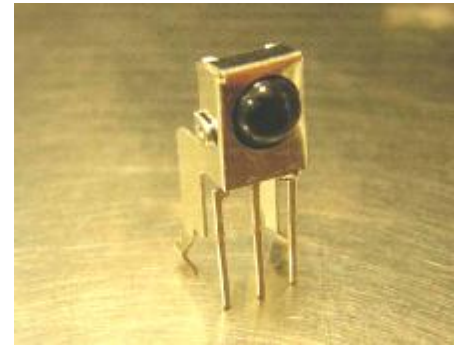


Features

- | Photo detector and preamplifier in one package
- | Internal filter for PCM frequency
- | High immunity against ambient light
- | Improved shielding against electric field disturbance
- | 5.0-Volt supply voltage; low power consumption
- | TTL and CMOS compatibility

MIM-5xx9H7 Series Models

- | MIM-5339H7 32.7KHz
- | MIM-5379H7 36.7KHz
- | MIM-5389H7 37.9KHz
- | MIM-5409H7 40.0KHz
- | MIM-5569H7 56.7KHz

BLOCK DIAGRAM

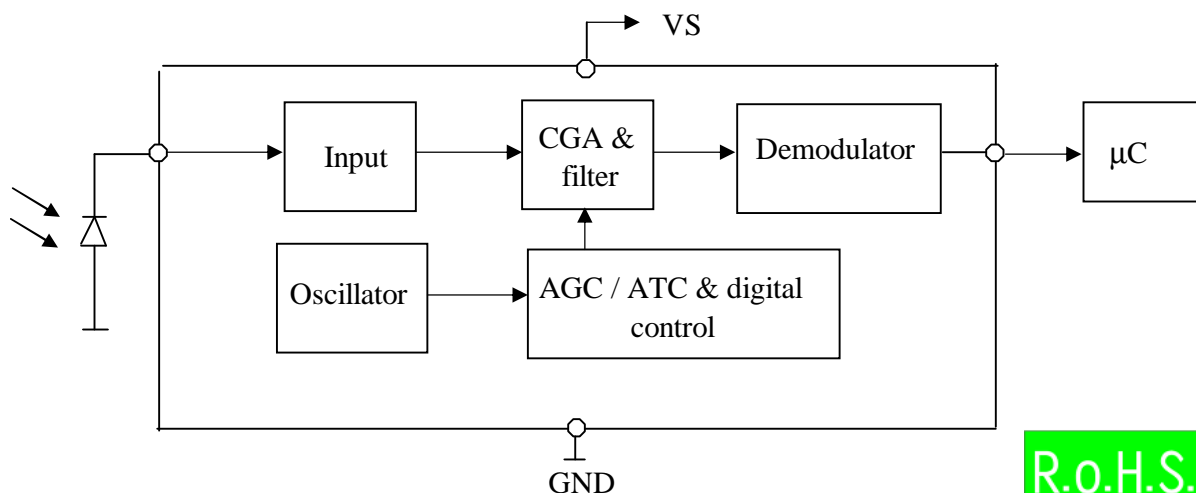

Absolute Maximum Ratings

@ Ta=25°C

Item	Symbol	Ratings	Unit	Remark
Supply voltage	V _{CC}	0 ~ 6.0	V	
Supply Current	I _s	2.5	mA	
Operating temperature	T _{opr}	-20 ~ + 80	°C	
Storage temperature	T _{stg}	-20 ~ + 80	°C	
Soldering temperature	T _{sd}	260	°C	t≤5 s, 1mm from case
Junction Temperature	T _j	100	°C	
Power dissipation at Ta=25oC	P _{tot}	50	mW	

Electro-optical characteristics (Vcc=5.0V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remarks
Supply Voltage	V _s	4.5	5.0	5.5	V	
Current consumption	I _{cc}		1.3	2.5	mA	Under no signal
Response wavelength	λ _p		940		nm	
Output form	----- active low output -----					
H level output voltage	V _{oh}	4.2	5.0		V	
L level output voltage	V _{ol}		0.2	0.5	V	
H level output pulse width	T _{wh}	500		800	μs	
L level output pulse width	T _{wl}	500		800	μs	
Distance between emitter & detector	L ₁	10.0			m	Note 1
Half angle	Δθ		±45		deg	Horizontal direction

Test Method

A. Standard Transmitter

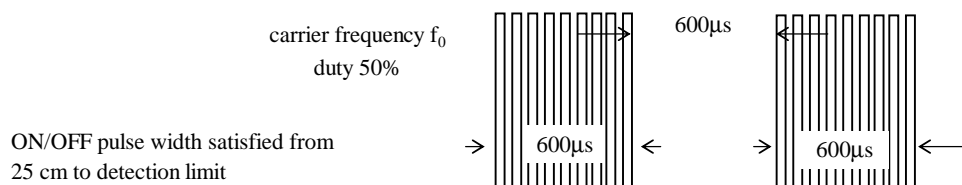


Fig 1. Burst Wave



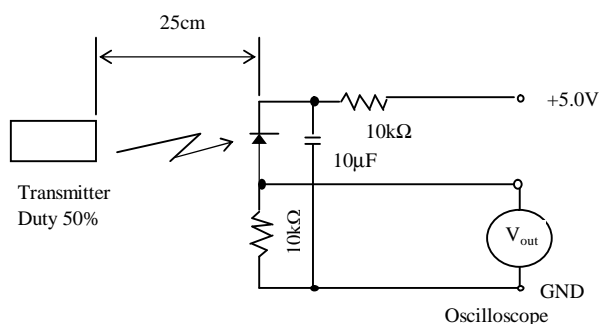


Fig 2. Standard Transmitter Measurement circuit


B. Detection Length Test

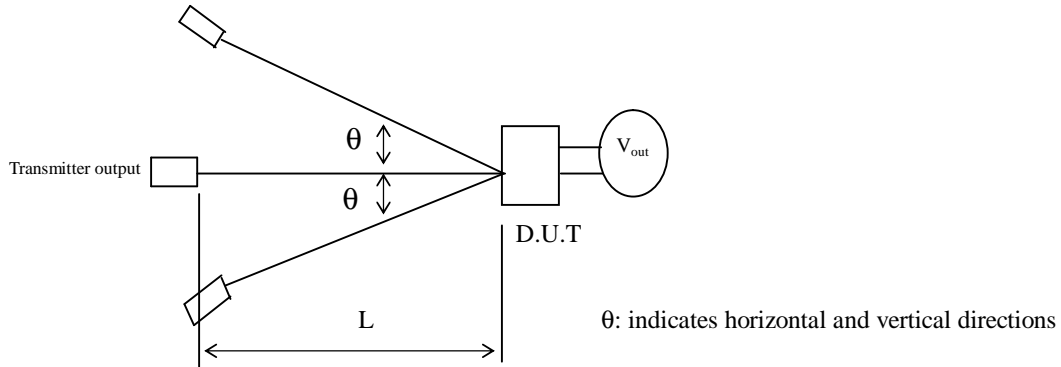

C . Pulse Width Test

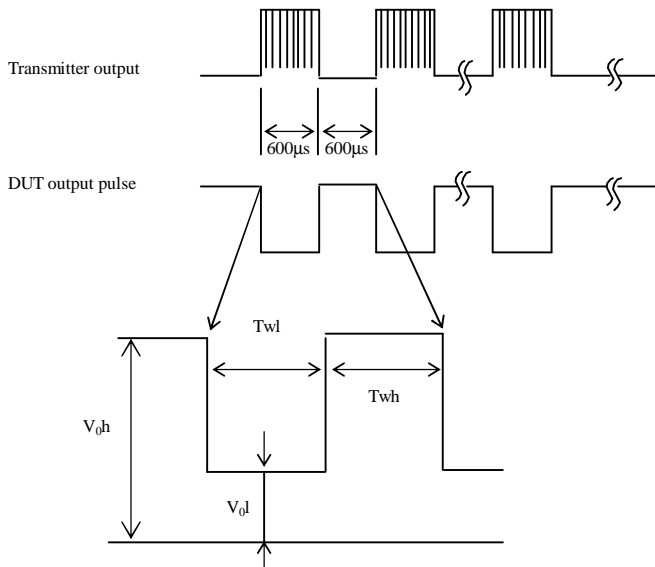


Application Circuit

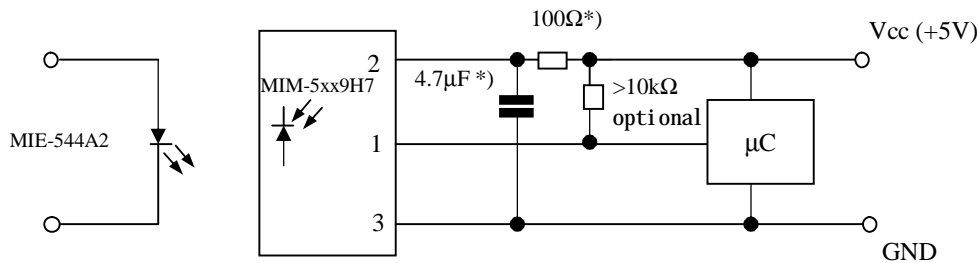


*) recommended to suppress power supply disturbances

Dimensions in mm

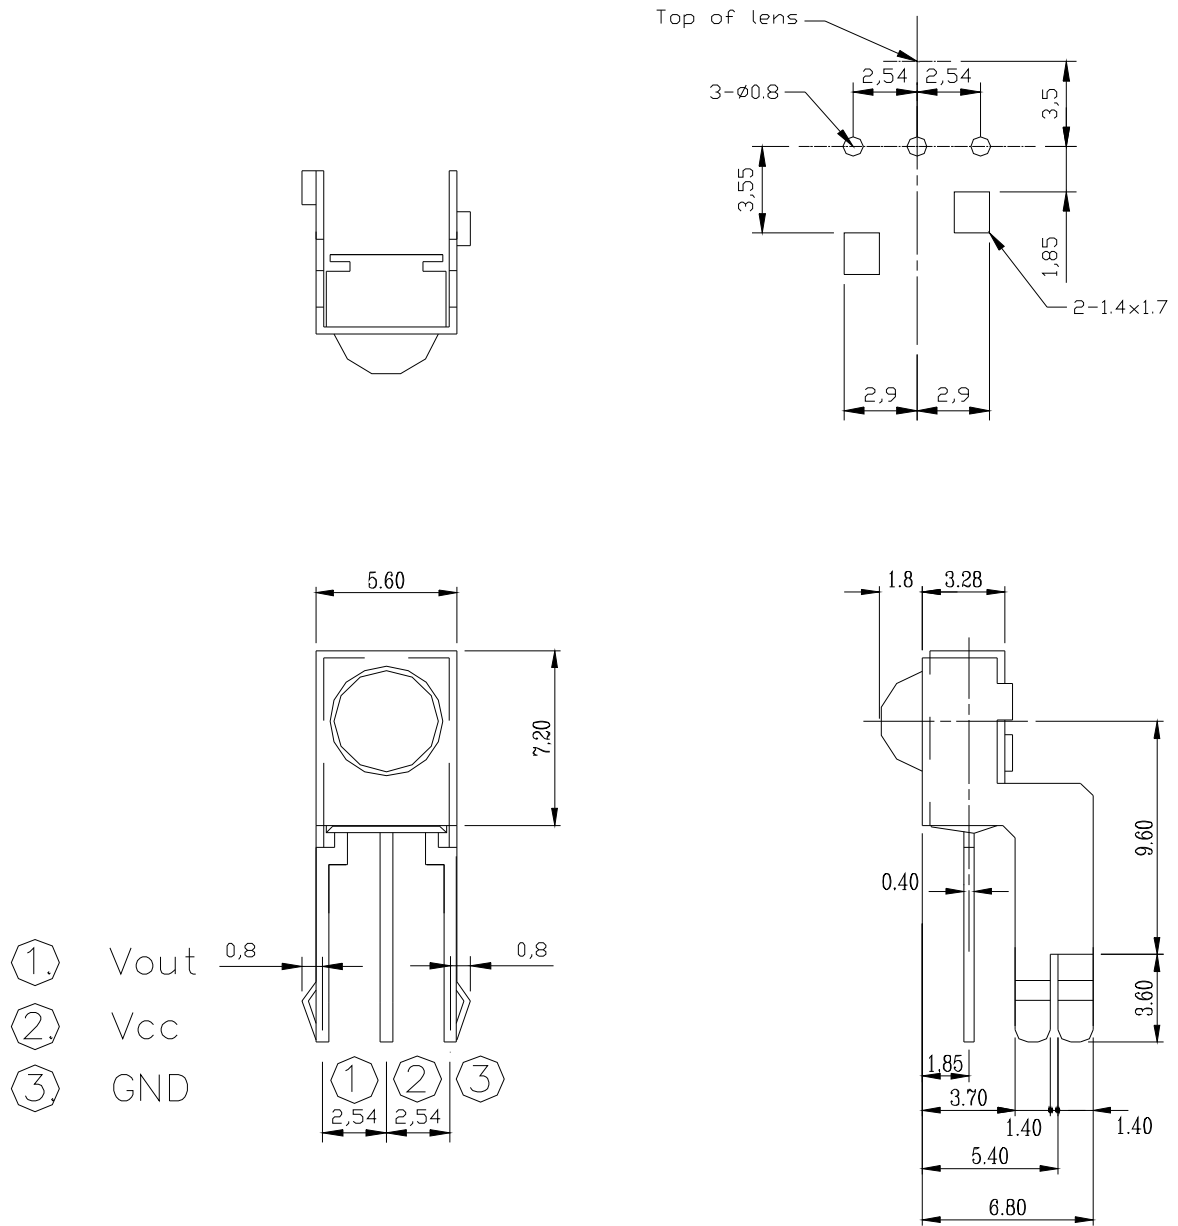


P_s TOLERANCE : ± 0.30 UNLESS OTHERWISE SPECIFIED


CHARACTERISTIC CURVES ($T_A=25^{\circ}C$)

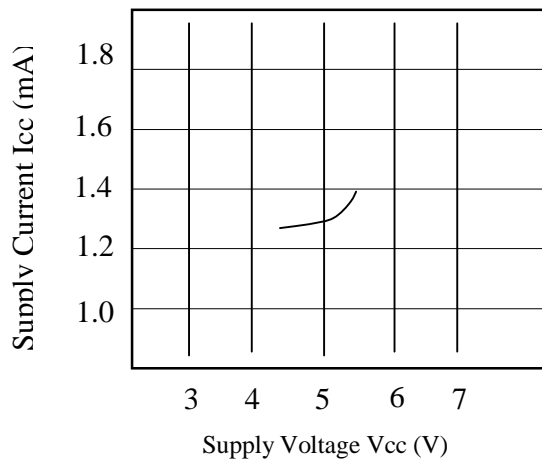


SUPPLY VOLTAGE vs. SUPPLY CURRENT

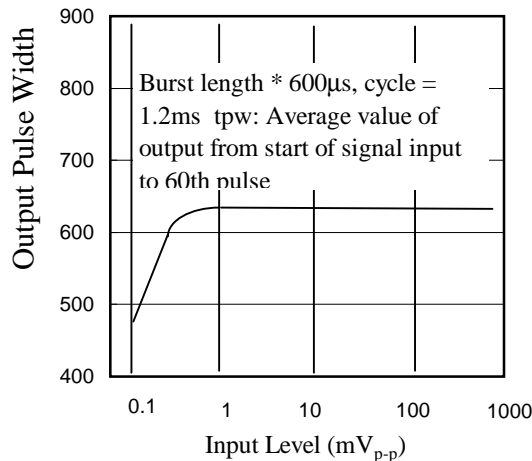


INPUT LEVEL vs. OUTPUT PULSE WIDTH

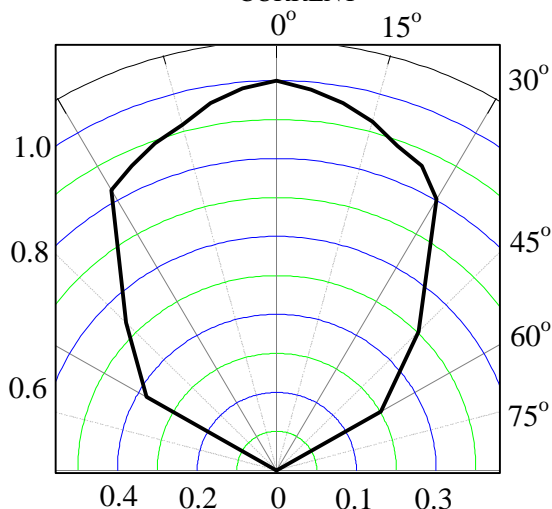


RELATIVE TRANSMISSION DISTANCE

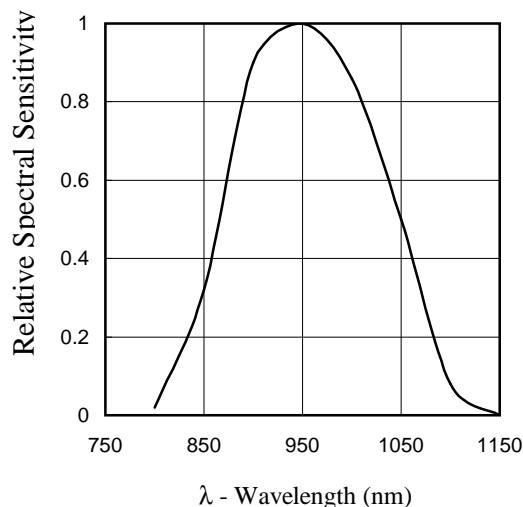

RELATIVE SPECTRAL SENSITIVITY vs WAVELENGTH

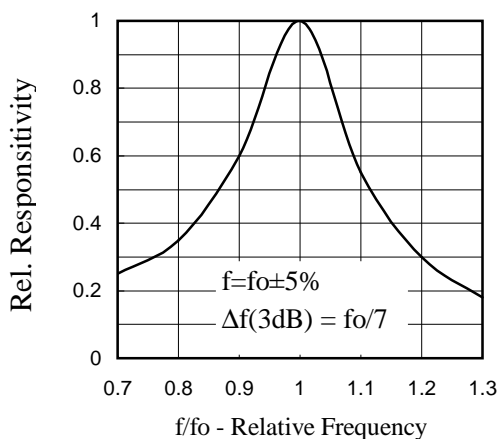

FREQUENCY DEPENDENCE OF RESPONSIVITY

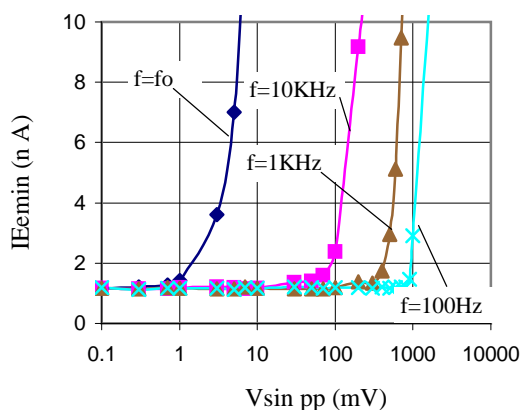

SENSITIVITY vs SUPPLY VOLTAGE DISTURBANCES

Reliability

Test item	Test condition	Standard
High temperature	Ta=+80°C t=240H	Note 2.
High temp. & high humi.	Ta=+40°C 90%RH t=240H	Note 2.
Low temperature	Ta= -30°C t=240H	Note 2.
Temperature cycle	-30°C(0.5H) ~ +80°C(0.5H) 20cycle	Note 2.
Dropping	Test devices shall be dropped 3 times naturally onto hard wooden board from a 75cm height position.	Note 3.

NOTE 1. Distance between emitter & detector specifies maximum distance that output wave form satisfies the standard under the conditions below against the standard transmitter.

- (1) Measuring placeIndoor without extreme reflection of light.
- (2) Ambient light source... Detecting surface illumination shall be 200±50Lux under ordinary hite fluorescense lamp of no high frequency lighting.
- (3) Standard transmitter ... Burst wave indicated in Fig 1. of standard transmitter shall be arranged to 50mVp-p under the measuring circuit specified in Fig 2.

NOTE 2. (electro-optical characteristics) shall be satisfied after leaving 2 hours in the normal temperature .

NOTE 3. (electro-optical characteristics) shall be satisfied and no conoid deforms and destructions of appearance .(excepting deforms of terminals)

Inspection standard

1. Among electrical characteristics , total number shall be inspected on items blow.
 - 1-1 front distance between emitter & detector
 - 1-2 Current consumption
 - 1-3 H level output voltage
 - 1-4 L level output voltage
2. Items except above mentioned are not inspected particularly , but shall fully satisfy

CAUTION (When use and storage of this device)

1. Store and use where there is no force causing transformation or change in quality .
2. Store and use where there is no corrosive gas or sea(salt) breeze .
3. Store and use where there is no extreme humidity .
4. Solder the lead-pin within the condition of ratings. After soldering do not add extra force .
5. Do not wash this device . Wipe the stains of diode side with a soft cloth. You can use the solvent , ethylalcohol or methylalcohol or isopropylene only .
6. To prevent static electricity damage to the Pre-AMP make sure that the human body , the soldering iron is connected to ground before using .
7. Put decoupling device between Vcc and GND for reduce the noise from power supply line .
8. The performance of remote-control system depends on environments condition and ability of periferal parts. Customer should evaluate the performance as total system in those conditions after system up with components such as commander , micon and this receiver module .

Others

1. This device is not design to endure radiative rays and heavily charged particles .
2. In case where any trouble or questions arise, both parties agree to make full discussion covering the said problem .

Packing Specification*** Internal packing specification**One Tray (120pcs)**TRAY : 160 x 280 x 12 mm**One bag (10 Trays = 1200pcs)***Packing box specification**One inner carton (One bag =1200pcs)**INNER CARTON : 140 x 170 x 300 mm**One outer carton (4 inner cartons = 4800pcs)**OUTER CARTON: 300 x 340 x 320 mm*****Content (Standard)**

Items	Tray	Inner Carton	Outer Carton
MIM-5xx9H7	120 pcs / Tray	1200 pcs / Box	4800 pcs / Box
	0.13 Kg	1.5 Kg	6.4 Kg

Sensitivity vs. Supply Voltage Disturbances

- Test equipment :
1. Digital Scope
 2. Digital Multimeter
 3. Function Generator 1 : 38KHz
 4. Function Generator 2 : sine waveform , Offset 5V, 50ohm, Level eingestellt

Test method : as below

