

SMD Micro Infrared Receiver Module

0-05-08-01 Preliminary

Surface Mount Device

Module No.: PIC-5923TMB

Short Pulse Width Acceptable


1. Features:

- Microminiature size
- Built-in exclusive IC
- Wide half angle & long reception distance
- Continuous Signal Acceptable
- Suitable for R-C oscillating transmitter
- High protection ability to EMI
- Back Metal Cover
- Top view
- Mesh
- Wide voltage operating: 2.7V ~ 5.5V

2. Applications

- ▣ AV instruments (Audio, TV, VCR, CD player)
- ▣ Home appliances (Air-conditioner, Fan, Light.)
- ▣ Remote control for wireless devices

Dimensions

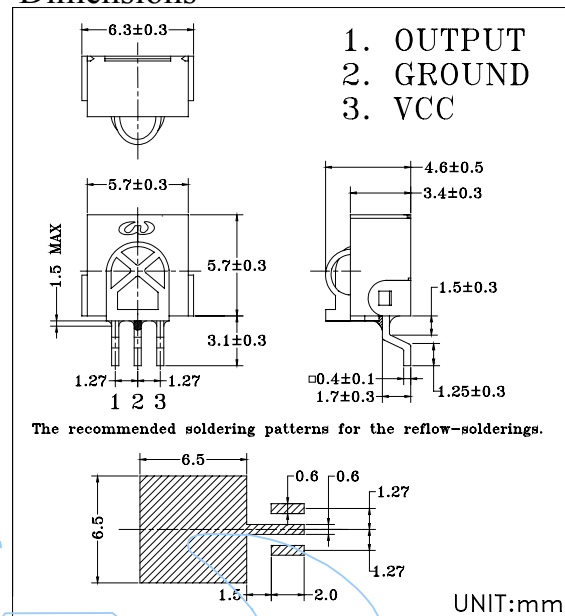

3. Absolute Maximum Ratings

(Ta=25°C)

| Parameter | Symbol | Ratings | Unit |
|--------------------------|--------|-----------|------|
| Supply Voltage | Vcc | 6.0 | V |
| Operating Temperature | Topr | -10 ~ +60 | °C |
| Storage Temperature | Tstg | -20 ~ +75 | °C |
| Soldering Temperature *1 | Tsol | 240 | °C |

*1 At the position of 2mm from the bottom of the package within 5 seconds.

4. Electro-optical Characteristics

(Ta=25°C)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------|------------------|--------------------|--------------------|---------|------|------|
| Supply Voltage | Vcc | | 2.7 | 3.0 | 5.5 | V |
| Current Consumption | Icc | Input Signal = 0 | | 1.0 | 1.5 | mA |
| Reception Distance | d | 200±5Lux, Vcc=3.0V | 7 | 10 | | m |
| Half Angle (Horizontal) | $\Delta\theta_h$ | | | ±45 | | deg |
| Half Angle (Vertical) | $\Delta\theta_v$ | | | +45/-40 | | deg |
| Peak Wavelength | λ_p | | | 940 | | nm |
| Signal Output | So | | --- Active Low --- | | | |
| High Level Output Voltage | Voh | | Vcc-0.5 | | | V |
| Low Level Output Voltage | Vol | | | 0.2 | 0.4 | V |
| High Level Pulse Width | Twh | Burst Wave = 600μs | 500 | 600 | 700 | μs |
| Low Level Pulse Width | Twl | | 500 | 600 | 700 | μs |

5. Reliability Test Items

(Ta=25°C)


| Test Items | Test Conditions | Ratings |
|-------------------------------------|-------------------------------|-----------|
| High Temperature Storage | Ta=60°C, Vcc=3.0V | t=240hr. |
| Low Temperature Storage | Ta=-10°C, Vcc=3.0V | t=240hr. |
| High Temperature High Humid Storage | Ta=40°C, 90%RH, Vcc=3.0V | t=240hr. |
| Temperature Cycling | -20°C (30min) ~ +70°C (30min) | 20 cycles |
| Soldering Heat | 240±5°C | 5 sec. |

SMD Micro Infrared Receiver Module


Surface Mount Device

Module No.: PIC-5923TMB

Sensitivity Diagram – Angular Displacement

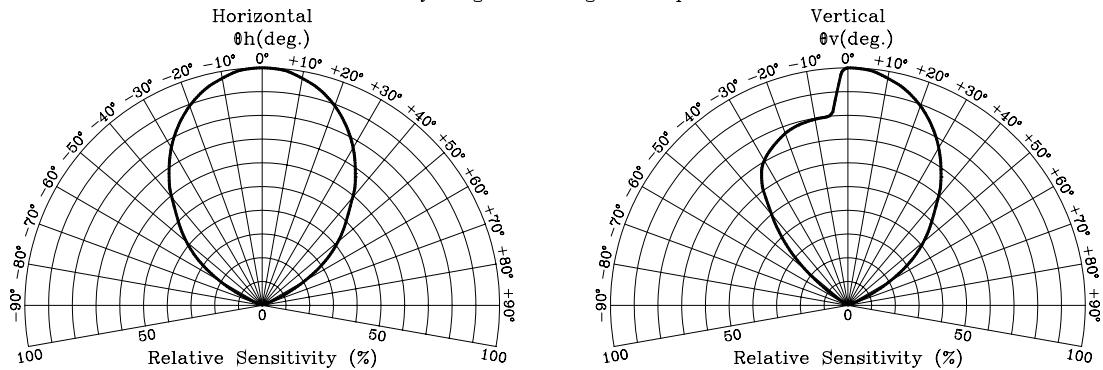


Relative Reception Distance vs Transmitter Carrier Frequency

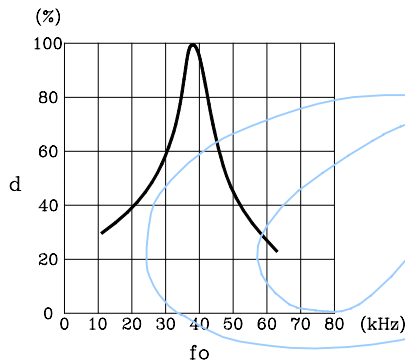


In case of noisy power supply, please serially insert 100Ω resistor and about 47μF electrolytic capacitor in Vcc line and ground as follows:-

- R1=22kΩ
- R2=47Ω~100Ω
- C1=47μF~100μF

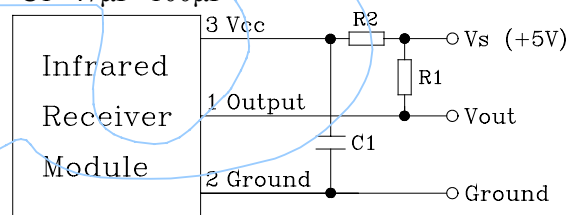

Block Diagram

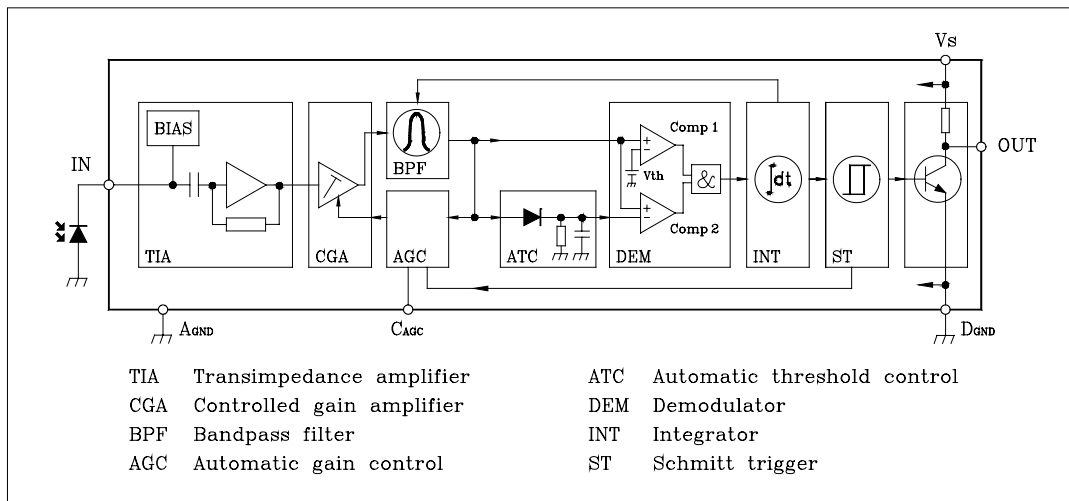

Standard Inspection

Among electrical characteristics, total quantity will be inspected as below:-

- ⊙ Distance between emitter and detector
- ⊙ Current consumption
- ⊙ H level output voltage
- ⊙ L level output voltage

SMD Micro Infrared Receiver Module

Surface Mount Device

Module No.: PIC-5923TMB

Testing Method

Distance between emitter and detector specifies maximum distance that output waveform satisfies the standard (FIG-3) under the conditions below against the standard transmitter.

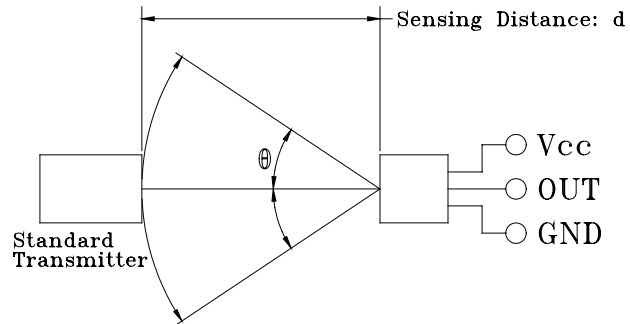


FIG-1

- Measuring place
Indoor without extreme reflection of light.
- Ambient light source
Detecting surface illumination is $200 \pm 5 \text{ Lux}$ under ordinary white fluorescence lamp of no high frequency lightning.
- Standard transmitter
Transmitter wave indicated in FIG-2 of standard transmitter is arranged to satisfy $V_o \geq 50 \text{ mVp-p}$ under the measuring circuit specified in FIG-3

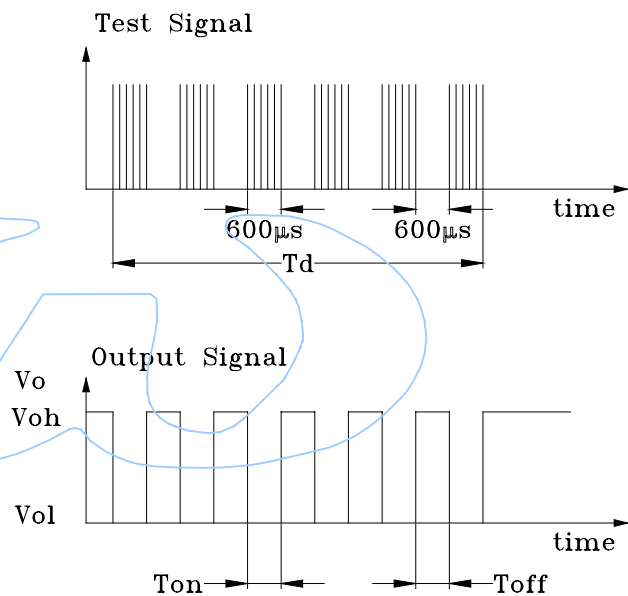


FIG-2

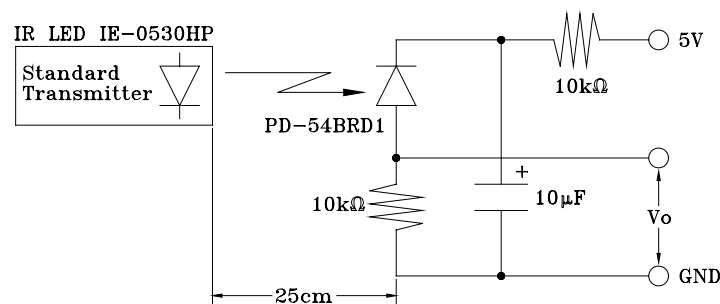


FIG-3 Power Output Measurement Circuit

Precautions for Use

- Store and use where there is no force causing transformation or change in quality.
- Store and use where there is no corrosive gas or sea (salt) breeze.
- Store and use where there is no extreme humidity.
- Solder the lead pin within the condition of ratings. After soldering, do not add exterior force.
- Do not wash this device. Wipe the stains of diode side with a soft cloth. You can use the solvent, ethyl alcohol, or methyl alcohol only.
- To prevent static electricity damage to the pre-amp, make sure that the human body, the soldering iron are connected to ground before using.