

## INFRARED REMOTE CONTROL RECEIVER

### ■ GENERAL DESCRIPTION

NJL60H/V000 series are small and high performance receiving devices for infrared remote control system. Comparing with the previous version, NJL50 series, the characteristic for inverter fluorescent lamp noise is improved. The pulse width of NJL60H/V000 series are stable relating to commander's power or distance between transmitter and receiver. NJL60H/V000 series have five kinds of package including three types of metal case to meet the various applications.

### ■ FEATURES

1. Mold type and metal case type to meet the design of front panel.
2. Elliptic lens to improve the characteristic against light noise from the upper and lower side.
3. Line-up for various center carrier frequencies.

### ■ APPLICATIONS


1. AV instruments such as Audio, TV, VCR, CD, MD, etc.
2. Home appliances such as Air-conditioner, Fan, etc.
3. The other equipments with wireless remote control.

### ■ LINE-UP

| Mold/ Metal Case  | Mold Type |           | Metal Case Type |           |           |
|-------------------|-----------|-----------|-----------------|-----------|-----------|
|                   | Top       | Side      | Top             |           |           |
| View              |           |           |                 |           |           |
| Height            |           |           |                 |           |           |
| Carrier Frequency | 5.4 mm    | 6.3 mm    | 8 mm            | 11 mm     | 15 mm     |
| fo=30 KHz         | NJL61H300 | NJL61V300 | NJL62H300       | NJL63H300 | NJL64H300 |
| 32.75KHz          | NJL61H328 | NJL61V328 | NJL62H328       | NJL63H328 | NJL64H328 |
| 36 KHz            | NJL61H360 | NJL61V360 | NJL62H360       | NJL63H360 | NJL64H360 |
| 36.7 KHz          | NJL61H367 | NJL61V367 | NJL62H367       | NJL63H367 | NJL64H367 |
| 38 KHz            | NJL61H380 | NJL61V380 | NJL62H380       | NJL63H380 | NJL64H380 |
| 40 KHz            | NJL61H400 | NJL61V400 | NJL62H400       | NJL63H400 | NJL64H400 |
| 56.8 KHz          | NJL61H568 | NJL61V568 | NJL62H568       | NJL63H568 | NJL64H568 |

※ Regarding the other frequencies or packages, please contact to New JRC individually.

### ■ BLOCK DIAGRAM

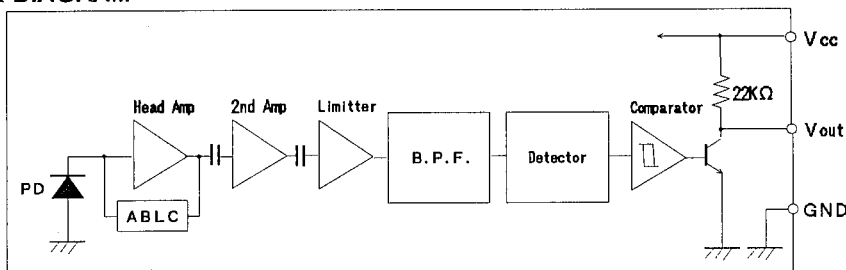

### ■ ABSOLUTE MAXIMUM RATINGS (Ta= 25 °C)

|                             |                  |                                  |
|-----------------------------|------------------|----------------------------------|
| Supply Voltage              | V <sub>cc</sub>  | 6.3V                             |
| Operating Temperature Range | T <sub>opr</sub> | -30 °C — +85 °C                  |
| Storage Temperature Range   | T <sub>stg</sub> | -40 °C — +85 °C                  |
| Soldering Temperature       | T <sub>sol</sub> | 260 °C 5sec 4.0mm from mold body |

# NJL61H/61V/62H/63H/64H000

## RECOMMENDED OPERATING CONDITION

Supply Voltage Range  $V_{cc}$  4.5V – 5.5V

## ELECTRO-OPTICAL CHARACTERISTICS ( $V_{cc} = 5.0V$ , $T_a = 25^\circ C$ )

| PARAMETER              | SYMBOL     | TEST CONDITION                      | MIN  | TYP | MAX  | UNIT    |
|------------------------|------------|-------------------------------------|------|-----|------|---------|
| Supply Current         | $I_{cc}$   | No Signal Input                     | —    | —   | 3    | mA      |
| Transmission Distance  | $L_c$      | Direction of Ray Axis *1            | 8    | 16  | —    | m       |
| Directivity            | $\theta_L$ | Angle of half $L_c$ , Horizontal *2 | —    | 50  | —    | deg     |
|                        | $\theta_V$ | Angle of half $L_c$ , Vertical *2   | —    | 35  | —    | deg     |
| Output Voltage Low     | $V_L$      | No Load                             | —    | 0.2 | 0.5  | V       |
| Output Voltage High    | $V_H$      | No Load                             | 4.5  | —   | —    | V       |
| Low Level Pulse Width  | $T_{WL}$   | See Test Circuit                    | 400  | —   | 800  | $\mu s$ |
| High Level Pulse Width | $T_{WH}$   | See Test Circuit                    | 400  | —   | 800  | $\mu s$ |
| Center Frequency       | $f_o$      | See Line-up                         | 30.0 | —   | 56.8 | KHz     |

Note \*1: Test with each center carrier frequency under the test condition shown below.

\*2: Place major axis of elliptic lens in horizontal direction and minor in vertical.

## TEST METHOD

Test condition is as follows:

### ( 1 ) Standard Transmitter:

Transmitting waveform is shown in Fig.1. Transmitting power should be adjusted so that output voltage  $V_{out}$  will be 400 mVp-p.

Regarding IR LED used for transmitter,  
 $\lambda_p = 940nm$ ,  $\Delta \lambda = 50nm$ .

Regarding photo diode, Sensitivity  
 $S = 26nA/Lx$ , in case light source  
 temperature 2856 °K,  $E_e = 100Lx$ ,  $VR = 5V$

### ( 2 ) Test system: Shown in Fig.3.

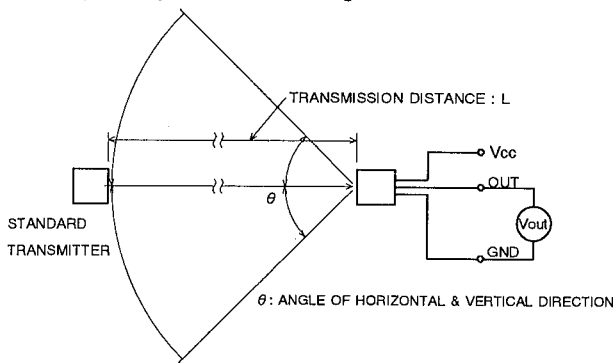


Fig. 3 TEST SYSTEM

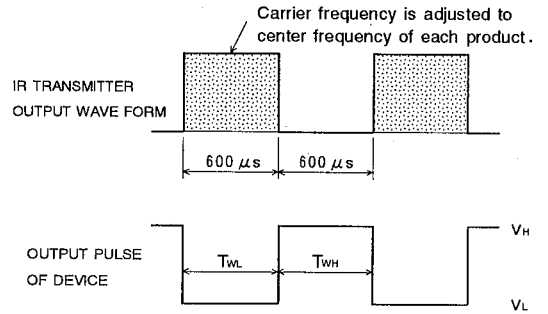


Fig. 1 TRANSMITTER WAVE FORM


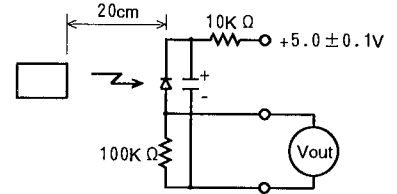



Fig. 2 STD. TRANSMITTER TEST CIRCUIT

## TYPICAL CHARACTERISTICS


Spectral Response  
( $T_a=25^\circ\text{C}$ )

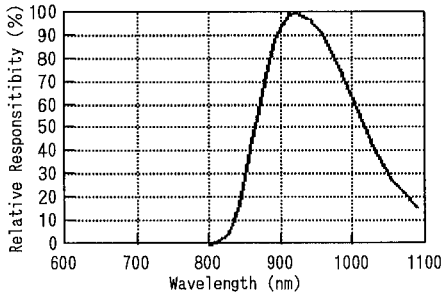


Directivity  
( $T_a=25^\circ\text{C}$ )

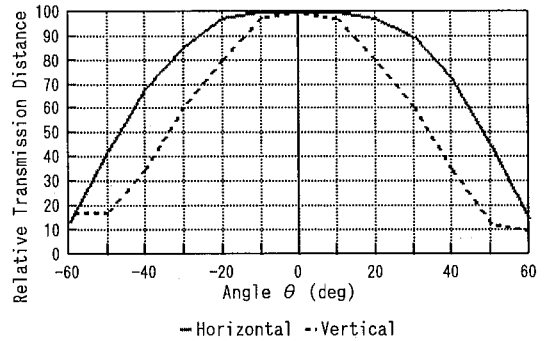


Output Pulse Width vs. Distance  
(Input Pulse Width =  $600\mu\text{s}$ ,  $V_{cc}=5.0\text{V}$ ,  $T_a=25^\circ\text{C}$ )

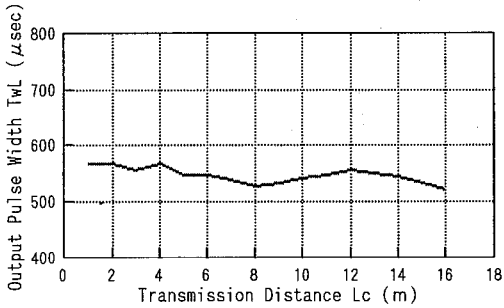


Transmission Distance vs. Supply Voltage  
( $T_a=25^\circ\text{C}$ )

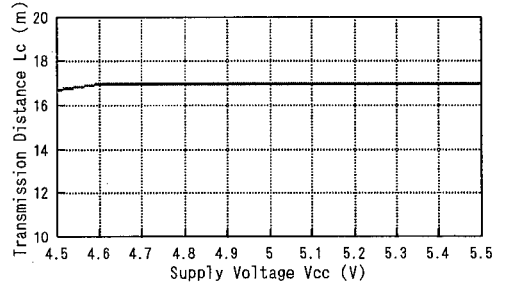

Transmission Distance vs. Carrier Frequency  
( $V_{cc}=5.0\text{V}$ ,  $T_a=25^\circ\text{C}$ )

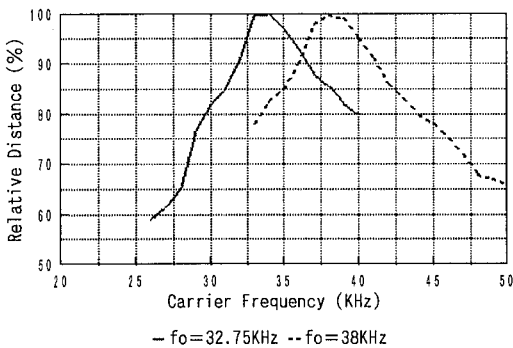


Transmission Distance vs. Temperature  
( $V_{cc}=5.0\text{V}$ )

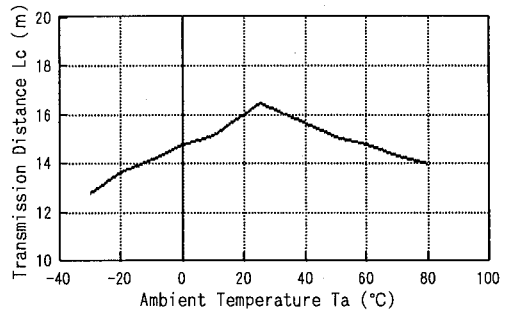

3




# NJL61H/61V/62H/63H/64H000

## RECOMMENDED APPLICATION CIRCUIT





RC Filter should be connected closely between Vcc pin and GND pin.




## OUTLINE



NJL61H000  
UNIT : mm

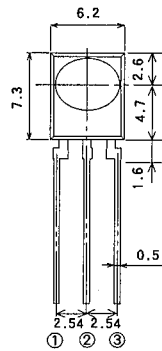

NJL61V000  
UNIT : mm




NJL61H000F3  
UNIT : mm


① OUT  
② GND  
③ Vcc

① OUT  
② GND  
③ Vcc


3

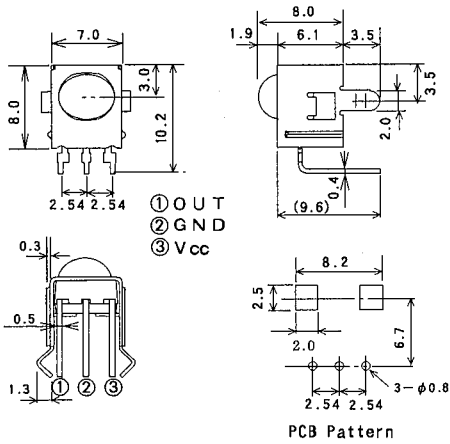

**NJL62H000**  
UNIT : mm

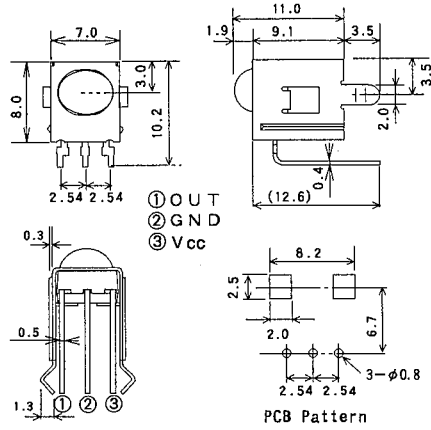

**NJL63H000**  
UNIT : mm

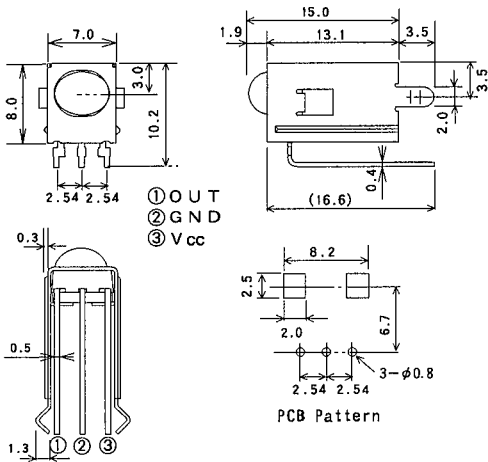

**NJL64H000**  
UNIT : mm

1. Tolerance is  $\pm 0.3\text{mm}$  unless otherwise noted.
2. Ground metal case on PCB. Metal case is not connected to GND pin inside.

# NJL61H/61V/62H/63H/64H000

---

MEMO

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.