


Features

- High sensitivity
- High operating temperature
- Low offset voltage
- Low TC of sensitivity and internal resistance
- Plastic miniature package SOT 143 for surface mounting (**SMT**)

Typical applications

- Digital speed sensors
- Digital position sensors
- Commutatorless DC motors

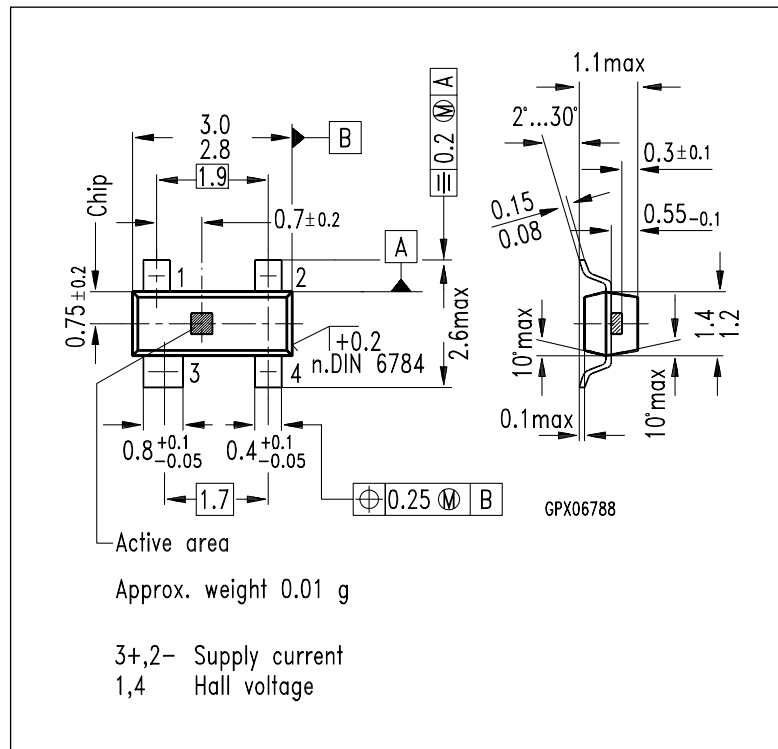

Dimensions in mm

Type	Marking	Ordering Code
KSY 13 (E 7502)	S 13	Q62705-K209 (taped on 18-cm reel)

The position sensor KSY 13 is an ion-implanted Hall generator made of mono-crystalline GaAs material. Enclosed in a miniature package (SOT 143), it is suitable for surface mounting (**SMT**).

If the sensor is operated with a constant supply current, the output Hall voltage is directly proportional to a magnetic field acting upon the sensor. This sensor is outstanding for its high magnetic field sensitivity and very low temperature coefficient.

The active area of the GaAs chip is approx. $0.2 \text{ mm} \times 0.2 \text{ mm}$ and is placed approx. 0.3 mm below the plastic surface of the package. The chip carrier is softmagnetic.

Maximum ratings

Parameter	Symbol	Value	Unit
Operating temperature range	T_A	– 40 / + 150	°C
Storage temperature range	T_{stg}	– 50 / + 160	°C
Supply current	I_1	7	mA
Thermal conductivity ¹⁾	$G_{th A}$	≥ 2.7	mW/K


Characteristics ($T_A = 25\text{ °C}$)

Nominal supply current	I_{1N}	5	mA
Open-circuit Hall voltage $I_1 = I_{1N}, B = 0.1\text{ T}$	V_{20}	95...145	mV
Ohmic offset voltage ²⁾ $I_1 = I_{1N}, B = 0\text{ T}$	V_{R0}	$\leq \pm 30$	mV
Supply and Hall side internal resistance $B = 0\text{ T}$	$R_{10, 20}$	900...1200	Ω
Temperature coefficient of the open-circuit Hall voltage $I_1 = I_{1N}, B = 0.2\text{ T}$	TC_{V20}	approx. –0.05	%/K
Temperature coefficient of the internal resistance $B = 0.2\text{ T}$	$TC_{R10, R20}$	approx. + 0.1...0.18	%/K


1) Thermal conductivity chip-ambient when mounted on alumina ceramic 15 mm x 16.7 mm x 0.7 mm

2) Selection upon request

**Open-circuit Hall voltage V_{20}
versus temperature**
referred to V_{20} at $T_A = 25\text{ °C}$

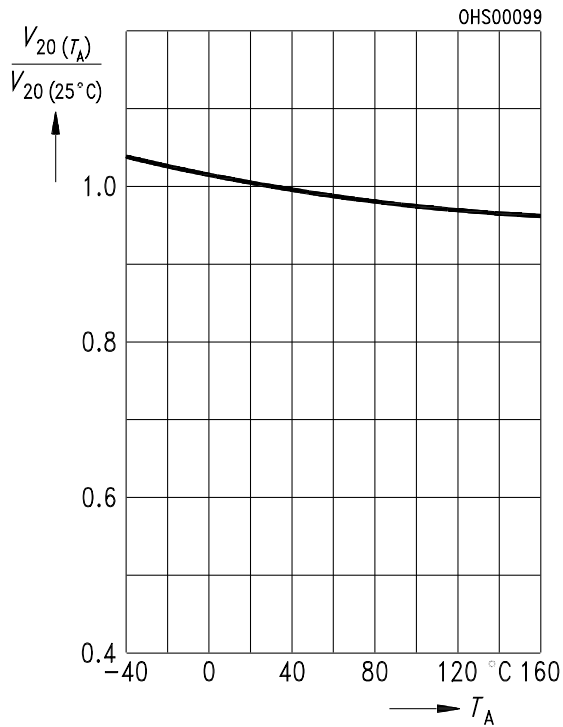

**Max. permissible supply current I_1
versus temperature T_A**

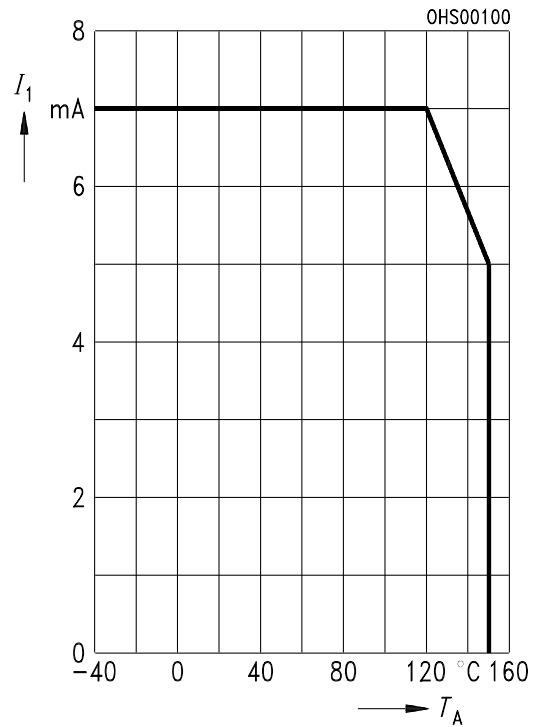

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.

www.yc-dz.com