Unit in mm

TOSHIBA PHOTOINTERRUPTER INFRARED LED + PHOTOTRANSISITOR

# TLP1230(C4)

COPIER, LASER BEAM PRINTER

FACSIMILE, PRINTER, ELECTRONIC TYPEWRITER AUTOMATIC VENDING MACHINE, TERMINAL **EQUIPMENT IN BANKING FACILITIES** VARIOUS POSITION DETECTION SENSOR

TLP1230 (C4) are photointerrupters with a connector using an GaAs infrared LED at the emitter side and a Si photo IC at the detector side respectively.

The phototransistor is turned off when a substance is detected (when the light is shielded).

This product is also usable in applications requiring severe using temperature condition such as detection of paper exit on copier, etc. connector)

- Small package
- Phototransistor output (Cathode, emitter common)
- Mountable by one touch (Snap-in mounting type)

Mountable to boards in 2 kinds of thickness (1.0mm, 1.2mm) 5mm

Gap

Resolution

Large operation temperature range

High current transfer ratio

UL recognized PWB adopted

Material of the case

Connector

+ 0 17.0 - 0.2 6.0 ± 0.1 SLIT WIDTH 0.5 ± 0.1 SENSOR CONNECTOR<sub>m</sub> UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE 6>  $\pm 0.1$ REFERENCE 6<14  $\pm 0.2$ VALUE **JEDEC EIAJ** 

11-15C4

Weight: 1.1g (typ.)

**TOSHIBA** 

Slit width 0.5mm

 $T_{opr} = -25 \sim 95^{\circ}C$ 

 $I_C/I_F=5\%$  (min)

UL94V-0

Polycarbonate

53014-0310 (Molex Japan Co., Ltd. made 2mm pitch connector)

961001EBC2


TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.

The products described in this document are subject to foreign exchange and foreign trade control laws.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of TOSHIBA CORPORATION or others.

# PIN CONNECTION



# MAXIMUM RATINGS (Ta = 25°C)

CHARACTERIS	SYMBOL	RATING	UNIT		
Forward Current		$I_{\mathbf{F}}$	50	mA	
Forward Current Ta>25°C		ΔI <sub>F</sub> /°C	-0.33	mA/°C	
Derating	Ta>85°C		-2	III.A./ U.	
Reverse Voltage	$V_{\mathbf{R}}$	5	V		
Collector-Emitter Volta	V <sub>CEO</sub>	35	V		
Emitter-Collector Volta	$V_{ECO}$	5	V		
Collector Power Dissipa	PC	75	mW		
Collector Power Dissipation Derating (Ta>25°C)		△P <sub>C</sub> /°C	-1	mW/°C	
Collector Current	IC	50	mA		
Operating Temperature	$T_{ m opr}$	-25~95	°C		
Storage Temperature R	$T_{ m stg}$	-40~100	°C		

# OPTO-ELECTRICAL CHARACTERISTICS $(Ta = 25^{\circ}C)^{\circ}$

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
	Forward Voltage	$v_{\mathbf{F}}$	$_{ m F}$ $I_{ m F}$ = 10mA		1.15	1.30	V
LED	Reverse Current	$I_R$ $V_R = 5V$			_	10	$\mu$ A
LED	Peak Emission Wavelength	$\lambda_{\mathbf{P}}$	$I_{ m F}\!=\!20{ m mA}$	_	940	_	nm
	Dark Current	$I_{\mathrm{D}}$	$V_{CE} = 24V, I_F = 0$	1	_	0.1	$\mu$ A
DETECTOR	Peak Sensitivity Wavelength	$\lambda_{\mathbf{P}}$	_	_	870		nm
	Current Transfer Ratio	$I_C/I_F$	$V_{CE}=5V,\ I_F=20mA$	5	_	100	%
COUPLED	Collector-Emitter Saturation Voltage	V <sub>CE</sub> (sat)	$I_{\mathrm{F}}\!=\!20\mathrm{mA},I_{\mathrm{C}}\!=\!0.5\mathrm{mA}$	_	0.15	0.4	V
	Rise Time	$\mathfrak{t}_{\mathbf{r}}$	$V_{\rm CC}$ =5 $V$ , $I_{\rm C}$ =2 $m$ A	_	6	_	110
	Fall Time	$t_{\mathrm{f}}$	$R_{\rm L}$ = 100 $\Omega$	_	6	_	$\mu$ s

CHARACTERISTIC	TEST CO	NDITION	LIMIT	
	DIRECTION	A		
PULL	WEIGHT	19.6N	NO DEFECT OF	
	TIME	5s/ONCE	ELECTRICAL	A
	DIRECTION	В	CHARACTERISTICS	
BEND	WEIGHT	9.8N		
	TIME	5s/THRICE		

#### **PRECAUTION**

Please be careful of the followings.

- 1. When installing, avoid to work by holding the connector by hand. Always, install by holding the main body of the element while assuring the mounting board is not warped or twisted. The connectors shall be inserted or pulled out at normal temperature.
- 2. It is recommended to mount this product by inserting from the sheet metal pressed side.
- 3. The container is made of polycarbonate. Polycarbonate is usually stable with acid, alcohol, and aliphatic hydrocarbons however, with pertochemicals (such as benzene, toluene, and acetone), alkali, aromatic hydrocarbons, or chloric hydrocarbons, polycarbonate becomes cracked, swollen, or melted. Please take care when chosing a packaging material by referencing the table below.

Chemicals to avoid with polycarbonate

	PHENOMENON	CHEMICALS
Α	Little deterioration but staining	• nitric acid (low concentration), hydrogen peroxide, chlorine
В	Cracked, crazed, or swollen	<ul> <li>acetic acid (70% or more)</li> <li>gasoline</li> <li>methyl ethyl ketone, ehtyl acetate, butyl acetate</li> <li>ethyl methacrylate, ethyl ether, MEK</li> <li>acetone, m-amino alcohol, carbon tetrachloride</li> <li>carbon disulfide, trichloroethylene, cresol</li> <li>thinners, oil of turpentine</li> <li>triethanolamine, TCP, TBP</li> </ul>
С	Melted { }: Used as solvent.	<ul> <li>concentrated sulfuric acid</li> <li>benzene</li> <li>styrene, acrylonitrile, vinyl acetate</li> <li>ethylenediamine, diethylenediamine</li> <li>chloroform, methyl chloride, tetrachloromethane, dioxane,</li> <li>1, 2-dichloroethane</li> </ul>
D	Decomposed	ammonia water     other alkali


#### RECOMMENDABLE MATCHED CONNECTOR


Molex Japan Co., Ltd. made connector (Low profile type)


HOUSING	51004-0300				
	TYPE No.	PRODUCT FORM	MATERIAL	AWG SIZE	INSULATION DIAMETER
TERMINAL	50011-8100	LOOSEN		AWG24~30	1.4mm MAX
TERMINAL	50011-8000	LINKED	PHOSPHOR	AWG24~30	
	50031-8100 Lo	LOOSEN	BRONZE	AWG30~34	0.9mm MAX
	50031-8000	LINKED			


For details of the connectors, please refer to the connector maker.


#### PRODUCT INDICATION

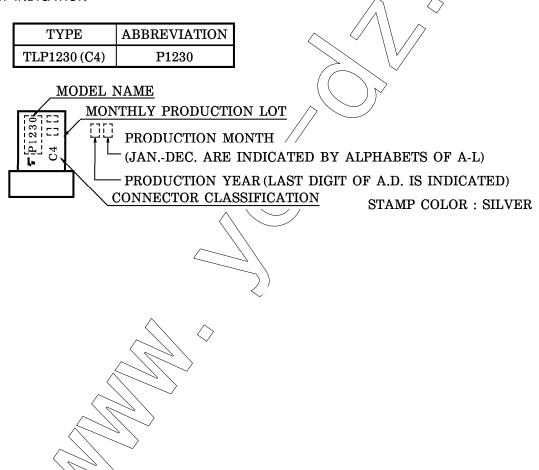


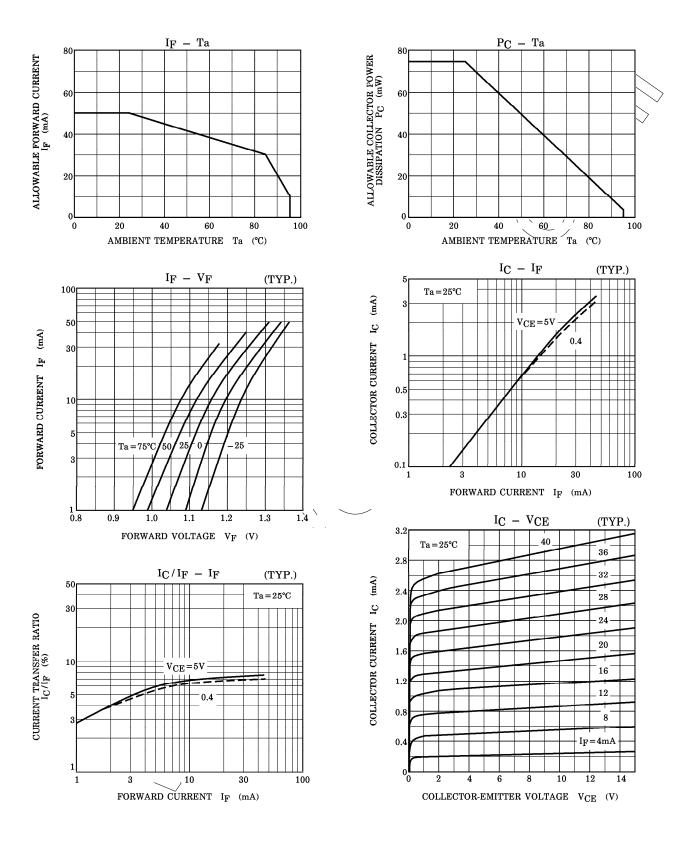


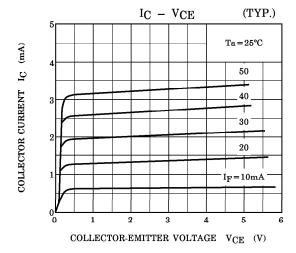


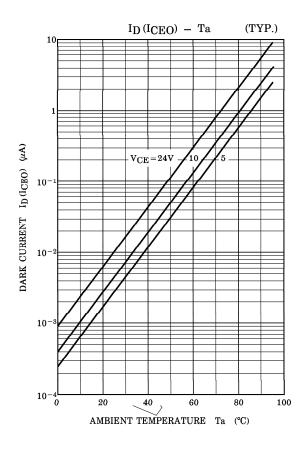


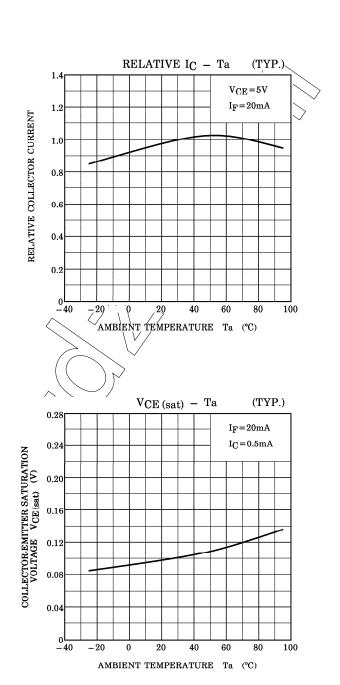

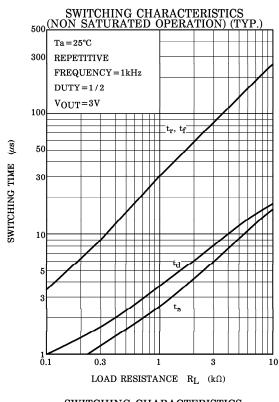


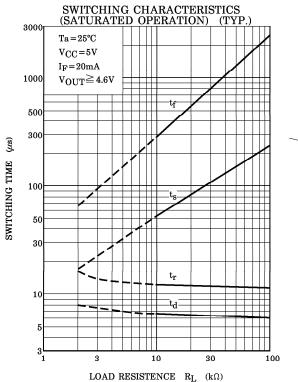

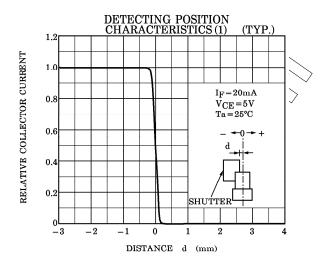

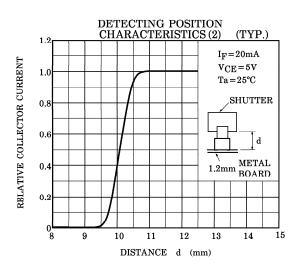

#### SWITCHING TIME TEST CIRCUIT

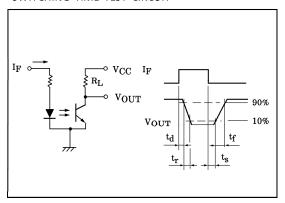


# POSITIONING OF SHUTTER AND DEVICE

To operate correctly, make sure that the shutter and the device are positioned as shown in the figure below.

The shit pitch of the shutter must be set wider than the slit width of the device.


Determine the width taking the switching time into consideration.

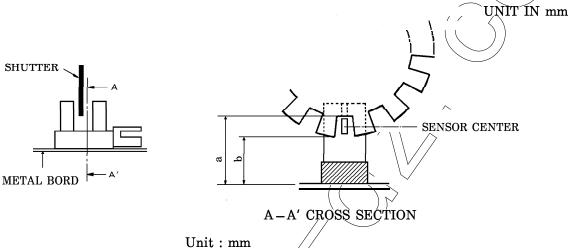



	· ·
ZE	b SIZE

THICKNESS	a SIZE	b SIZE
1.0	11.9MIN.	9.4MAX.
1.2	11.7MIN.	9.2MAX.

# RECOMMENDED MOUNTING HOLE







FOR THICKNESS 1.0mm

FOR THICKNESS 1.2mm

This datasheet has been download from:

 $\underline{www.datasheet catalog.com}$ 

