TOSHIBA Photo IC Silicon Epitaxial Planar

TPS855(F)

Lead Free Product

Luminosity Adjustment for TV Screens, CRT Monitors and Liquid-crystal Display Monitors Other Equipment Requiring Luminosity Adjustment

The TPS855(F) is a linear-output photo-IC which incorporates a photodiode and a current amp circuit in a single chip. This photo-IC is current output type, so can set up output voltage freely by arbitrary load resistance.

- High sensitivity :IL = 280 μA (typ.) @ EV = 100 lx Using the fluorescent light
- · Little fluctuation in light current
 - $: 1.67 \text{ times width } (\pm 25\% \text{ typ.})$
- Excellent illumination output linearity
- Open-emitter output
- · Side-view package
- Environmentally friendly silicon used as chip material instead of CdS Suitable as a substitute for CdS-based products

Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Supply voltage	V _{CC}	−0.5~7	V
Output voltage	V _{OUT}	≦ V _{CC}	V
Light current	ΙL	10	mA
Permissible power dissipation	Р	150	mW
Operating temperature range	T _{opr}	-25~85	°C
Storage temperature range	T _{stg}	-40~100	°C
Soldering temperature range (5s) (Note 1)	T _{sol}	260	°C

Note 1: Solder under the lead stopper.


Electrical and Optical Characteristics (Ta = 25°C)

Characteristics		Symbol	Test Condition	Min	Тур.	Max	Unit
Supply voltage		V _{CC}	_	2.7	_	5.5	V
Supply current		Icc	$\begin{aligned} &V_{CC}=5 \text{ V, E}_{V}=1000 \text{ Ix} \\ &R_{L}=250 \ \Omega \end{aligned} \qquad \text{(Note 2)}$	_	4.5		mA
Light current (1)		I _L (1)	V _{CC} = 5 V, E _V = 100 lx (Note 2), (Note 4)		365		μА
Light current (2)		I _L (2)	$V_{CC} = 5 \text{ V}, E_V = 10 \text{ Ix}$ (Note 3), (Note 4)	21	28	35	μА
Light current (3)		I _L (3)	V _{CC} = 5 V, E _V = 100 lx (Note 3), (Note 4)	210	280	350	μА
Light current ratio		<u>lL (1)</u> <u>lL (3)</u>	_	_	1.3	1.7	
Dark current		I _{LEAK}	V _{CC} = 5.5 V, E _V = 0		_	0.5	μΑ
Saturation output voltage		Vo	$V_{CC} = 5 \text{ V}, \text{ R}_L = 75 \text{ k}\Omega, \text{ E}_V = 100 \text{ lx}$ (Note 3)	4.2	4.35		V
Peak sensitivity wavelength		λр	_	_	640	_	nm
Switching time	Rise time	t _r	$V_{CC} = 5 \text{ V}, R_L = 5 \text{ k}\Omega$		0.2		- ms
	Fall time	t _f	(Note 5)		0.6		


Note 2: CIE standard A light source is used (color temperature = 2856K, approximaterd incandescence light)

Note 3: Fluorescence light is used as light source. However, white LED is substituted in a mass-production process.

Note 4: Light current measuremen circuit




Note 5: Rise time/fall time measurement method

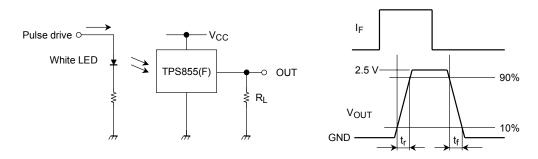


2

Package Dimensions: TOSHIBA 0-5K1

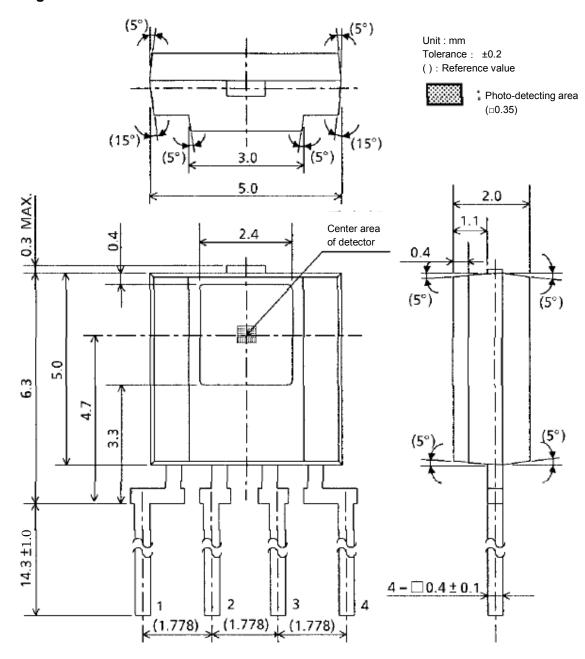

Weight: 0.20 g (typ.)

Block Diagram



3 2004-05-07


Handling Precautions


At power-on in darkness, the internal circuit takes about 50 ms to stabilize. During this period the output signal is unstable and may change. Please take this into account.


Mounting Precautions


- (1) When forming the leads, bend each lead under the lead stopper. Soldering must be performed after the leads have been formed.
- (2) Soldering must be performed under the stopper.
- (3) To stabileze the power line, insert a bypass capacitor of up to $0.01\,\mu$ F between Vcc and GND, close to the device.


4
























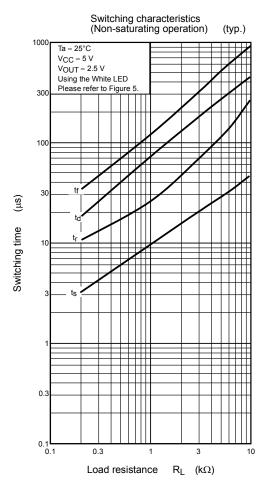


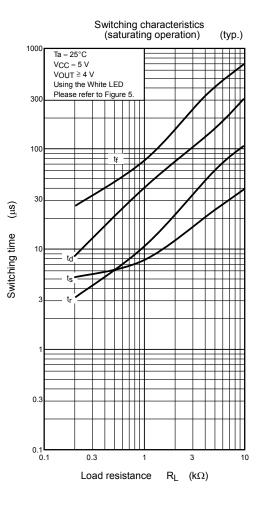


TOSHIBA TPS855(F)









Measurement Circuits




Figure 1 Light current measurement circuit




Figure 2 Dark current measurement circuit




Figure 3 Consumption current measurement circuit





Figure 3 Output voltage measurement circuit



 $\begin{array}{c|c} I_{F} & t_{d} & t_{s} \\ \hline 2.5 \text{ V} & & & \\ \hline \\ \text{GND} & & t_{r} & & t_{f} \\ \hline \end{array}$

Figure 5 Switching measurement circuit and waveform

RESTRICTIONS ON PRODUCT USE

Handbook" etc..

030619EBA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
 In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.