

SG - 204

The SG - 204 photointerrupter high - performance standard type, combines high - output GaAs IRED with high sensitive phototransistor.

FEATURES


- 0.5mm aperture
- High - speed response
- Available for 2 type P.C.Bs.
- Widely applicable

APPLICATIONS

- Copiers
- Facsimiles
- Printers
- Edge sensors
- Floppy disk drives

DIMENSIONS

(Unit : mm)

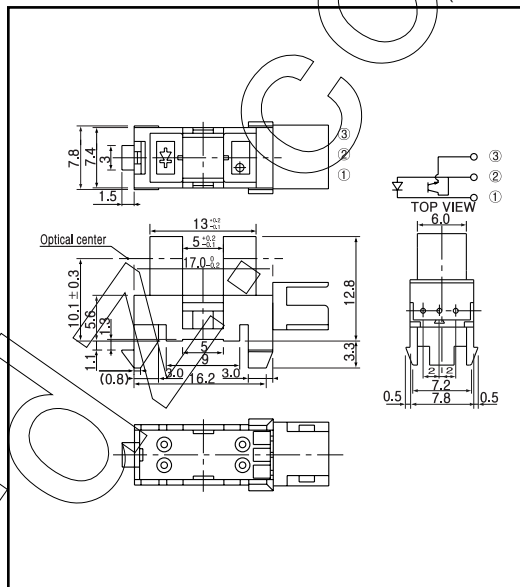

MAXIMUM RATINGS

(Ta=25 °C)

Item	Symbol	Rating	Unit
Input	Power dissipation	100	mW
	Reverse voltage	5	V
	Forward current	60	mA
	Pulse forward current *1	1	A
Output	Collector power dissipation	100	mW
	Collector current	40	mA
	C - E voltage	30	V
	E - C voltage	5	V
Operating temp.		- 20 ~ +85	
Storage temp.		- 30 ~ +85	

*1. t w 100 μsec. period : T=10msec.


*2. The connector shall be inserted or pulled out at normal temperature

ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 °C)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	Forward voltage	I _F = 30mA		1.2	1.5	V
	Reverse current	V _R = 5V			10	μA
	Capacitance	V = 0, f = 1kHz		25		pF
	Peak wavelength			940		nm
Output	Collector dark current	V _{CE} = 10V			0.1	μA
	Light current	V _{CE} = 5V, I _F = 20mA	0.6			mA
	C - E saturation voltage	I _F = 30mA, I _C = 0.1mA			0.4	V
	Switching speeds	V _{CC} = 5V, I _F = 2mA		5		μsec.
		R _L = 100Ω		5		μsec.


Collector power dissipation Vs. Ambient temperature

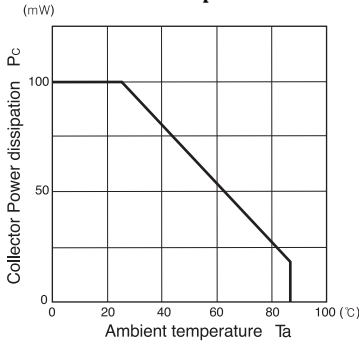


Forward current Vs. Forward voltage




Light current Vs. Forward current

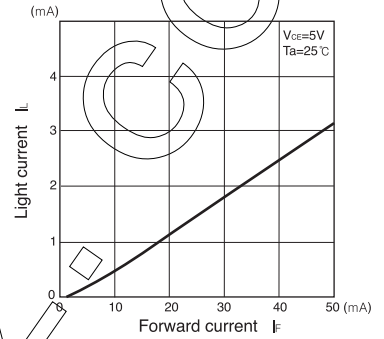


Light current Vs. Collector-Emitter voltage




Relative light current Vs. Ambient temperature




Dark current Vs. Ambient temperature

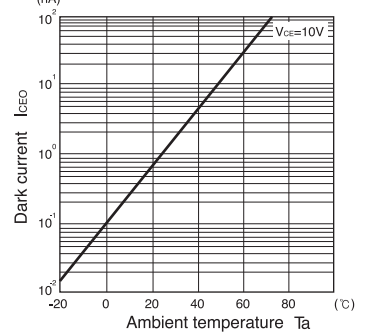


Switching time Vs. Load resistance



Relative light current Vs. Moving distance



Switching time measurement circuit

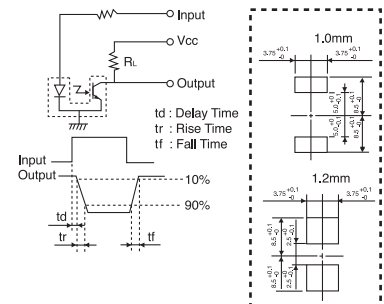

Method of measuring position characteristic

