

OV7648 Color CMOS VGA (640 x 480) CAMERACHIP[™] OV7148 B&W CMOS VGA (640 x 480) CAMERACHIP[™]

General Description

The OV7648 (color) and OV7148 (black and white) CAMERACHIPS[™] are low voltage CMOS image sensors that provide the full functionality of a single-chip VGA (640 x 480) camera and image processor in a small footprint package. The OV7648/OV7148 provides full-frame, sub-sampled or windowed 8-bit images in a wide range of formats, controlled through OmniVision's Serial Camera Control Bus (SCCB) interface.

This product family has an image array capable of operating at up to 30 frames per second (fps) with complete user control over image quality, formatting and output data transfer. All required image processing functions, including exposure control, gamma, white balance, color saturation, hue control and more, are also programmable through the SCCB interface. In addition, OmniVision CAMERACHIPS use proprietary sensor technology to improve image quality by reducing or eliminating common lighting/electrical sources of image contamination such as fixed pattern noise, smearing, blooming, etc. to produce a clean, fully stable color image.

Features

- High sensitivity for low-light operation
- 2.5V operating voltage for embedded portable applications
- Standard Serial Camera Control Bus (SCCB) interface
- VGA, QVGA (sub-sampled) and Windowed outputs with Raw RGB, RGB (GRB 4:2:2), YUV (4:2:2) and YCbCr (4:2:2) formats
- Automatic image control functions including: Automatic Exposure Control (AEC), Automatic Gain Control (AGC), Automatic White Balance (AWB), Automatic Brightness Control (ABC), Automatic Band Filter (ABF) for 60Hz noise and Automatic Black-Level Calibration (ABLCL)
- Image quality controls including color saturation, hue, gamma, sharpness (edge enhancement), anti-blooming and zero smearing

Ordering Information


Product	Package
OV7648-K06A (Color)	CSP-22
OV7148-K06A (B&W)	CSP-22

Applications

- Cellular Phones
- Picture Phones
- Toys
- PC Multimedia

Key Specifications

	Array Size	640 x 480 (VGA)
Power Supply	Core	2.5VDC \pm 10%
	Analog	2.5VDC \pm 4%
	I/O	2.25V to 3.3V
Power Requirements	Active	40 mW (30 fps, including I/O power)
	Standby	30 μ W
Temperature Range	Operation	-10°C to 70°C
	Stable Image	0°C to 50°C
Output Formats (8-bit)		<ul style="list-style-type: none"> • YUV/YCbCr 4:2:2 • RGB 4:2:2 • Raw RGB Data
Lens Size		1/4"
Maximum Image Transfer Rate	VGA	30 fps
	QVGA	60 fps
Sensitivity	B&W	2.20 V/Lux-sec
	Color	1.12 V/Lux-sec
S/N Ratio		46 dB
Dynamic Range		62 dB
Scan Mode		Progressive/Interlaced
Maximum Exposure Interval		523 x t _{ROW}
Gamma Correction		0.45
Pixel Size		5.6 μ m x 5.6 μ m
Dark Current		30 mV/s
Well Capacity		60 Ke
Fixed Pattern Noise		< 0.03% of V _{PEAK-TO-PEAK}
Image Area		3.6 mm x 2.7 mm
Package Dimensions		4930 μ m x 4760 μ m

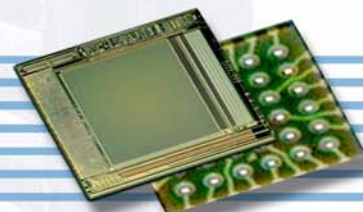



All information shown herein is current as of the revision and publication date. Please refer to the OmniVision web site (<http://www.ovt.com>) to obtain the current versions of all documentation.

OmniVision Technologies, Inc. reserves the right to make changes to their products or to discontinue any product or service without further notice (It is advisable to obtain current product documentation prior to placing orders).

Reproduction of information in OmniVision product documentation and specifications is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations and notices. In such cases, OmniVision is not responsible or liable for any information reproduced.

This document is provided with no warranties whatsoever, including any warranty of merchantability, non-infringement, fitness for any particular purpose, or any warranty otherwise arising out of any proposal, specification or sample. Furthermore, OmniVision Technologies Inc. disclaims all liability, including liability for infringement of any proprietary rights, relating to use of information in this document. No license, expressed or implied, by estoppels or otherwise, to any intellectual property rights is granted herein.

'OmniVision', 'CameraChip' are trademarks of OmniVision Technologies, Inc. All other trade, product or service names referenced in this release may be trademarks or registered trademarks of their respective holders. Third-party brands, names, and trademarks are the property of their respective owners.

For further information, contact OmniVision Technologies at info@ovt.com or any of our sales offices:

USA Headquarters

1341 Orleans Drive
Sunnyvale, CA 94089
USA

Tel: +1 408 542 3000
Fax: +1 408 542 3001

Email: salesAmerica@ovt.com

Beijing Branch

3119 EverBright Nat. Trust Bldg.
No. 11 South Zhong Guan Cun Road
Haiden Dist. Beijing 100081

Tel: +86 10 6848 6964
Fax: +86 10 6848 6882

Email: salesChina@ovt.com

Hong Kong Branch

Flat 1-2, 8/F
Ever Gain Plaza Tower 1
88 Container Port, Kwai Chung
New Territories, Hong Kong

Tel: +852 2403 4011
Fax: +852 2403 4018

Email: salesChina@ovt.com

Korea Branch

ORIX Bldg. 405
755-5 Banbae-dong
Seocho-Ku, Seoul South Korea

Tel: +82 2 4378 2811
Fax: +82 2 4378 2813

Email: salesKorea@ovt.com

Europe Branch

Albany House
14 Shute End, Wokingham
Berkshire, RG40 1BJ, UK

Tel: +44 1189 740 191
Fax: +44 1189 740 204

Email: salesEurope@ovt.com

Shanghai Branch

Room 201, #12 Building
498 Guo Shoujing Road
Shanghai 201203

Tel: +86 21 5080 3390
Fax: +86 21 5080 3389

Email: salesChina@ovt.com

Taiwan Branch

3F-7, #700, Chung Cheng Road
Chung-ho City, Taipei Hsein
Taiwan, R.O.C.

Tel: +886 2 8227 3770
Fax: +886 2 8227 3773

Email: salesTaiwan@ovt.com

Japan Branch

333 New State Manor, 2-23-1
Yoyogi, Shibuya-Ku, Tokyo
151-0053

Tel: +81 3 5333 8235
Fax: +81 3 5333 8236

Email: salesJapan@ovt.com

Shenzhen Branch

Room 1511
3027 Sherman Road
Central Shenzhen 518033

Tel: +86 755 8328 9329
Fax: +86 755 8328 9327

Email: salesChina@ovt.com

www.ovt.com