


# Reflexlichtschranke Reflective Interrupter

## SFH 9201

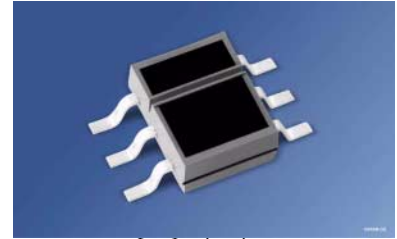

### Wesentliche Merkmale

- Optimaler Arbeitsabstand 1 mm bis 5 mm
- IR-GaAs-Lumineszenzdiode in Kombination mit einem Si-NPN-Fototransistor
- Tageslichtsperrfilter
- Hoher Kollektor-Emitter-Strom typ. 0.7 mA
- Geringe Sättigungsspannung
- Sender und Empfänger galvanisch getrennt

### Anwendungen

- Positionsmelder
- Drehzahlüberwachung, -regelung
- Bewegungssensor

### Features

- Optimal operating distance 1 mm to 5 mm
- IR-GaAs-emitter in combination with a Silicon NPN phototransistor
- Daylight cut-off filter
- High collector-emitter current typ. 0.7 mA
- Low saturation voltage
- Emitter and detector electrically isolated

### Applications

- Position reporting
- End position switch
- Speed monitoring and regulating
- Motion transmitter

| Typ<br>Type  | Bestellnummer<br>Ordering Code | $I_{CE}$<br>$I_F = 10 \text{ mA}, V_{CE} = 5 \text{ V}, d = 1 \text{ mm}$<br>mA |
|--------------|--------------------------------|---------------------------------------------------------------------------------|
| SFH 9201     | Q62702-P5038                   | 0.25 ... 2.00                                                                   |
| SFH 9201-2/3 | Q62702-P5056                   | 0.40 ... 1.25                                                                   |
| SFH 9201-3/4 | Q62702-P5057                   | 0.63 ... 2.00                                                                   |

**Grenzwerte**  
**Maximum Ratings**

| Bezeichnung<br>Parameter                                  | Symbol<br>Symbol | Wert<br>Value | Einheit<br>Unit |
|-----------------------------------------------------------|------------------|---------------|-----------------|
| <b>Sender (GaAs-Diode)</b><br><b>Emitter (GaAs diode)</b> |                  |               |                 |
| Sperrspannung<br>Reverse voltage                          | $V_R$            | 5             | V               |
| Vorwärtsgleichstrom<br>Forward current                    | $I_F$            | 50            | mA              |
| Verlustleistung<br>Power dissipation                      | $P_{tot}$        | 80            | mW              |

**Empfänger (Si-Fototransistor)**  
**Detector (silicon phototransistor)**

|                                                                                                    |           |     |    |
|----------------------------------------------------------------------------------------------------|-----------|-----|----|
| Dauer-Kollektor-Emitter-Sperrspannung<br>Continuous collector-emitter voltage                      | $V_{CE}$  | 16  | V  |
| Kollektor-Emitter-Sperrspannung, ( $t \leq 2$ min)<br>Collector-emitter voltage, ( $t \leq 2$ min) | $V_{CE}$  | 30  |    |
| Emitter-Kollektor-Sperrspannung<br>Emitter-collector voltage                                       | $V_{EC}$  | 7   |    |
| Kollektorstrom<br>Collector current                                                                | $I_C$     | 10  | mA |
| Verlustleistung<br>Total power dissipation                                                         | $P_{tot}$ | 100 | mW |

**Reflexlichtschranke**  
**Light Reflection Switch**

|                                                          |                                         |                |    |
|----------------------------------------------------------|-----------------------------------------|----------------|----|
| Lagertemperatur<br>Storage temperature range             | $T_{stg}$                               | - 40 ... + 100 | °C |
| Umgebungstemperatur<br>Ambient temperature range         | $T_A$                                   | - 40 ... + 100 |    |
| Elektrostatistische Entladung<br>Electrostatic discharge | ESD                                     | 2              | KV |
| Umweltbedingungen / Environment conditions               | 3 K3 acc. to EN 60721-3-3 (IEC 721-3-3) |                |    |

**Kennwerte** ( $T_A = 25\text{ °C}$ )**Characteristics**

| Bezeichnung<br>Parameter                                          | Symbol<br>Symbol | Wert<br>Value        | Einheit<br>Unit |
|-------------------------------------------------------------------|------------------|----------------------|-----------------|
| <b>Sender</b> (IR-GaAs-Diode)<br><b>Emitter</b> (IR-GaAs diode)   |                  |                      |                 |
| Durchlaßspannung<br>Forward voltage<br>$I_F = 50\text{ mA}$       | $V_F$            | 1.25 ( $\leq 1.65$ ) | V               |
| Sperrstrom<br>Reverse current<br>$V_R = 5\text{ V}$               | $I_R$            | 0.01 ( $\leq 1$ )    | $\mu\text{A}$   |
| Kapazität<br>Capacitance<br>$V_R = 0\text{ V}, f = 1\text{ MHz}$  | $C_O$            | 25                   | pF              |
| Wärmewiderstand <sup>1)</sup><br>Thermal resistance <sup>1)</sup> | $R_{thJA}$       | 400                  | K/W             |

**Empfänger** (Si-Fototransistor)**Detector** (silicon phototransistor)

|                                                                                                                              |            |                  |     |
|------------------------------------------------------------------------------------------------------------------------------|------------|------------------|-----|
| Kapazität<br>Capacitance<br>$V_{CE} = 5\text{ V}, f = 1\text{ MHz}$                                                          | $C_{CE}$   | 10               | pF  |
| Kollektor-Emitter-Reststrom<br>Collector-emitter leakage current<br>$V_{CE} = 20\text{ V}$                                   | $I_{CEO}$  | 3 ( $\leq 200$ ) | nA  |
| Fotostrom (Fremdlichtempfindlichkeit)<br>Photocurrent (outside light density)<br>$V_{CE} = 5\text{ V}, E_V = 1000\text{ Lx}$ | $I_P$      | 3.5              | mA  |
| Wärmewiderstand <sup>1)</sup><br>Thermal resistance <sup>1)</sup>                                                            | $R_{thJA}$ | 400              | K/W |

**Kennwerte** ( $T_A = 25\text{ °C}$ )  
**Characteristics** (cont'd)


| Bezeichnung<br>Parameter | Symbol<br>Symbol | Wert<br>Value | Einheit<br>Unit |
|--------------------------|------------------|---------------|-----------------|
|--------------------------|------------------|---------------|-----------------|

**Reflexlichtschranke**  
**Light Reflection Switch**

|                                                                                                                                                                                                          |                                              |                     |          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|---------------------|----------|
| Kollektor-Emitterstrom<br>Collector-emitter current<br>Kodak neutral white test card, 90% Reflexion<br>$I_F = 10\text{ mA}$ ; $V_{CE} = 5\text{ V}$ ; $d = 1\text{ mm}$                                  | $I_{CE\text{ min.}}$<br>$I_{CE\text{ typ.}}$ | 0.25<br>0.70        | mA<br>mA |
| Kollektor-Emitter-Sättigungsspannung<br>Collector-emitter-saturation voltage<br>Kodak neutral white test card, 90% Reflexion<br>$I_F = 10\text{ mA}$ ; $d = 1\text{ mm}$ ; $I_C = 85\text{ }\mu\text{A}$ | $V_{CE\text{ sat}}$                          | 0.15 ( $\leq 0.6$ ) | V        |


1) Montage auf PC-Board mit  $> 5\text{ mm}^2$  Padgröße

1) Mounting on pcb with  $> 5\text{ mm}^2$  pad size

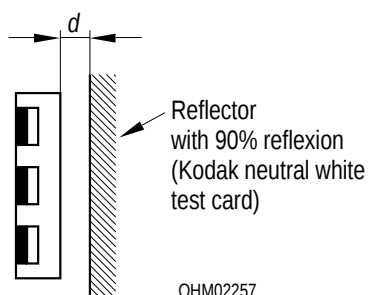

Schaltzeiten ( $T_A = 25\text{ °C}$ ,  $V_{CC} = 5\text{ V}$ ,  $I_C = 1\text{ mA}^{1)}$ ,  $R_L = 1\text{ k}\Omega$ )

### Switching Times

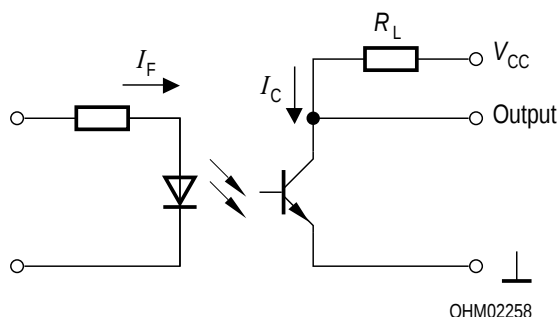


| Bezeichnung<br>Parameter       | Symbol<br>Symbol                     | Wert<br>Value | Einheit<br>Unit |
|--------------------------------|--------------------------------------|---------------|-----------------|
| Einschaltzeit<br>Turn-on time  | $t_{\text{ein}}$<br>$t_{\text{on}}$  | 65            | $\mu\text{s}$   |
| Anstiegszeit<br>Rise time      | $t_r$                                | 50            | $\mu\text{s}$   |
| Ausschaltzeit<br>Turn-off time | $t_{\text{aus}}$<br>$t_{\text{off}}$ | 55            | $\mu\text{s}$   |
| Abfallzeit<br>Fall time        | $t_f$                                | 50            | $\mu\text{s}$   |


<sup>1)</sup>  $I_C$  eingestellt über den Durchlaßstrom der Sendediode, den Reflexionsgrad und den Abstand des Reflektors vom Bauteil ( $d$ )

<sup>1)</sup>  $I_C$  as a function of the forward current of the emitting diode, the degree of reflection and the distance between reflector and component ( $d$ )


Collector Current  $\frac{I_C}{I_{Cmax}} = f(d)$

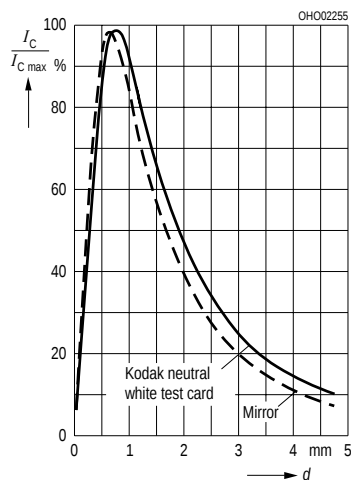


Permissible Power Dissipation for Diode and Transistor  $P_{tot} = f(T_A)$

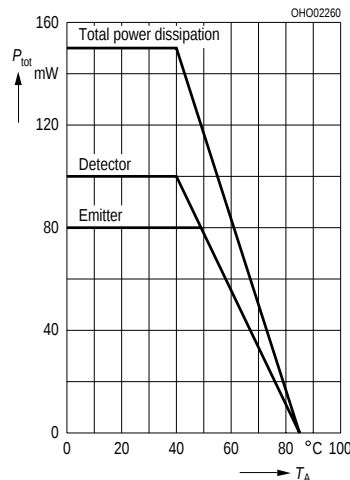


Switching Characteristics  $t = f(R_L)$   
 $T_A = 25^\circ\text{C}$ ,  $I_F = 10\text{ mA}$

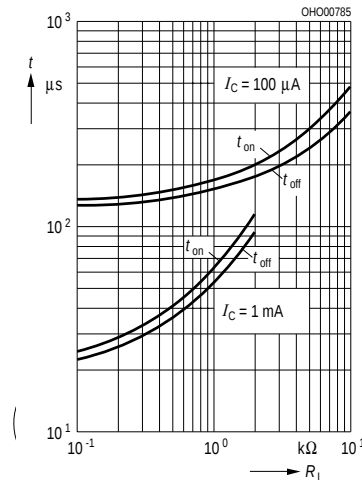


Max. Permissible Forward Current  
 $I_F = f(T_A)$

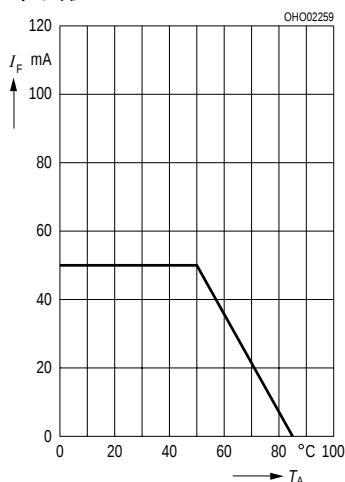


Transistor Capacitance (typ.)  
 $C_{CE} = f(V_{CE})$ ,  $T_A = 25^\circ\text{C}$ ,  $f = 1\text{ MHz}$

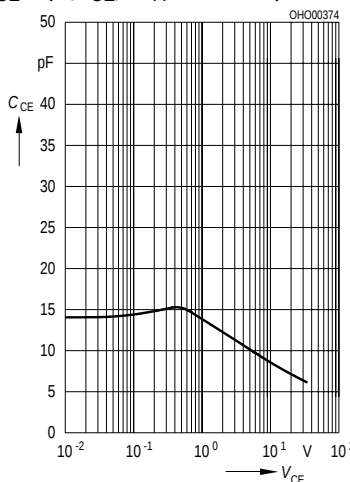


Collector Current  $I_C = f(I_F)$ , spacing  
 $d$  to reflector = 1 mm, 90% reflection

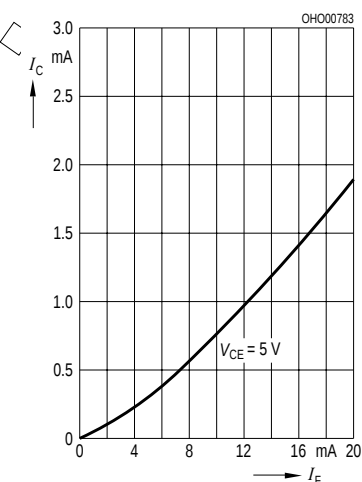


Forward Voltage (typ.) of the Diode  $V_F = f(T)$

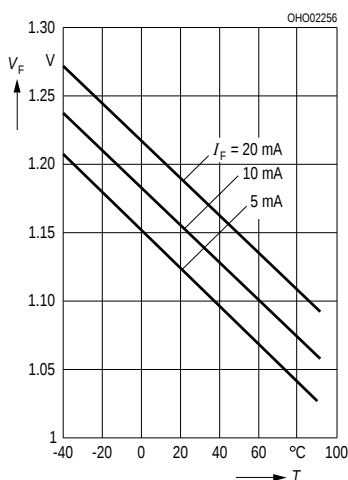


Relative Spectral Emission of  
Emitter (GaAs)  $I_{rel} = f(\lambda)$  and  
Detector (Si)  $S_{rel} = f(\lambda)$

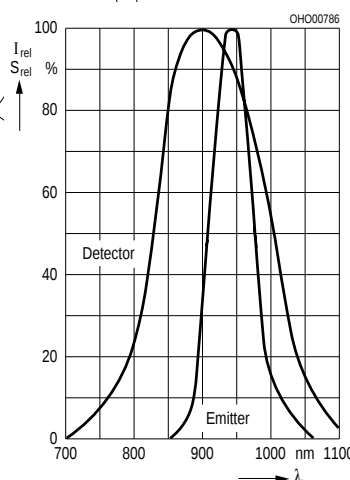

Output Characteristics (typ.)  
 $I_C = f(V_{CE})$ , spacing to reflector:  
 $d = 1\text{ mm}$ , 90% reflection,  $T_A = 25^\circ\text{C}$

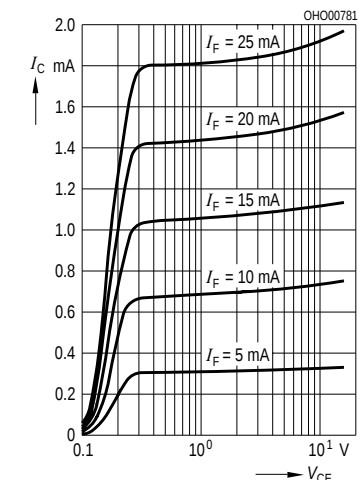

## Maßzeichnung Package Outlines

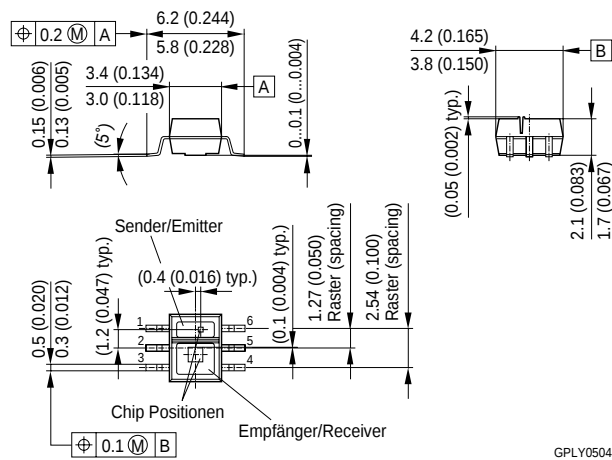

| Type     | 1     | 2 | 3       | 4         | 5 | 6       |
|----------|-------|---|---------|-----------|---|---------|
| SFH 9201 | Anode | – | Emitter | Collector | – | Cathode |

Maße werden wie folgt angegeben: mm (inch) / Dimensions are specified as follows: mm (inch).

## Löthinweise Soldering Conditions

| Bauform<br>Type | Drypack<br>Level acc.<br>to<br>IPS-stand.<br>020 | Tauch-, Schwalllötung<br>Dip, Wave Soldering |                           | Reflowlötung<br>Reflow Soldering |                              | Kolbenlötung<br>Iron Soldering<br>(Iron temp.) |
|-----------------|--------------------------------------------------|----------------------------------------------|---------------------------|----------------------------------|------------------------------|------------------------------------------------|
|                 |                                                  | Peak Temp.<br>(solderbath)                   | Max. Time in<br>Peak Zone | Peak Temp.<br>(package<br>temp.) | Max. Time<br>in Peak<br>Zone |                                                |
| SFH 9201        | 4                                                | n. a.                                        | –                         | 245 °C                           | 10 sec.                      | n.a.                                           |

Bitte Verarbeitungshinweise für SMT-Bauelemente beachten!

Please observe the handling guidelines for SMT devices!

Published by OSRAM Opto Semiconductors GmbH & Co. OHG  
Wernerwerkstrasse 2, D-93049 Regensburg  
© All Rights Reserved.

### Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances. For information on the types in question please contact our Sales Organization.

### Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

**Components used in life-support devices or systems must be expressly authorized for such purpose!** Critical components <sup>1</sup> may only be used in life-support devices or systems <sup>2</sup> with the express written approval of OSRAM OS.

<sup>1</sup> A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

<sup>2</sup> Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered.