


光电接收三极管

封装形式	型号	亮电流		测试条件		接收 角度 (度)	上升和 下降时间 us	集电极暗电 流最大值 @Vce=10V (nA)	C极-E极击穿 电压最小值 @Ic=100 μA (V)	E极-C极击穿 电压最小值 @Ie=100 μA (V)
		最小值 (mA)	最大值 (mA)	Vce (V)	辐射度 H (mW/cm2)					
 同轴封装	SD1440-001	0.7		5	5	24	15	100	30	5
	SD1440-002	1.5		5	5	24	15	100	30	5
	SD1440-003	3.0		5	5	24	15	100	30	5
	SD1440-004	6.0		5	5	24	15	100	30	5
 同轴封装, 发射极带引脚	SD1440-001L	0.7		5	5	24	15	100	30	5
	SD1440-002L	1.5		5	5	24	15	100	30	5
	SD1440-003L	3.0		5	5	24	15	100	30	5
	SD1440-004L	6.0		5	5	24	15	100	30	5
 子弹型	SD2440-001	0.5		5	20	48	15	100	30	5
	SD2440-002	2.0		5	20	48	15	100	30	5
	SD2440-003	4.0		5	20	48	15	100	30	5
	SD2440-004	7.0		5	20	48	15	100	30	5
 TO-46, 平面镜	SD3443-001	0.5		5	5	90	15	100	30	5
	SD3443-002	1.0		5	5	90	15	100	30	5
	SD3443-003	2.0		5	5	90	15	100	30	5
 TO-46, 球面镜	SD5443-001	1.0		5	5	18	15	100	30	5
	SD5443-002	4.0		5	5	18	15	100	30	5
	SD5443-003	8.0		5	5	18	15	100	30	5
	SD5443-004	16.0		5	5	18	15	100	30	5
 TO-18, 球面镜	SD5491-001	0.5		5	1.5	12	2	100	30	5
	SD5491-002	0.5	3.0	5	1.5	12	2	100	30	5
	SD5491-003	2.0	5.0	5	1.5	12	2	100	30	5
	SD5491-004	4.0	8.0	5	1.5	12	2	100	30	5
	SD5491-005	7.0	22.0	5	1.5	12	2	100	30	5
	SD5491-006	15.0		5	1.5	12	2	100	30	5
 T-1 型塑料封装	SDP8405-001	1		5	5	20	15	100	30	5
	SDP8405-002	7	14	5	5	20	15	100	30	5
	SDP8405-003	12	24	5	5	20	15	100	30	5
	SDP8405-011	0.16		5	0.25	20	15	100	30	5
	SDP8405-012	0.16	0.46	5	0.25	20	15	100	30	5
	SDP8405-013	0.32	0.92	5	0.25	20	15	100	30	5
	SDP8405-014	0.64	1.85	5	0.25	20	15	100	30	5
	SDP8405-015	1.25		5	0.25	20	15	100	30	5
 侧接收塑封型	SDP8406-001	0.15	1.9	5	1	50	15	100	30	5
	SDP8406-002	1.8	3.6	5	1	50	15	100	30	5
	SDP8406-003	3.4	6.5	5	1	50	15	100	30	5
	SDP8406-004	6.4	12	5	1	50	15	100	30	5


简图

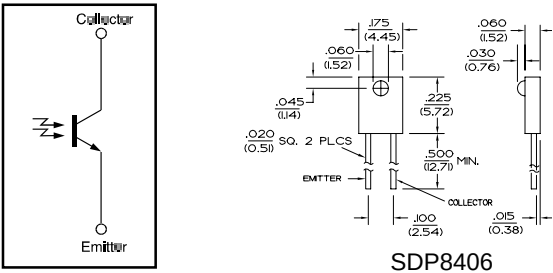

SDP8406

光电三极管


C 极 -E 极饱和 电压最大值 @Ic=0.4mA H=5mW/cm ² (V)	功耗 极限值 mW	工作温度 范围 °C	外形上和光谱 上适合匹配的 LED
0.4	75	-55 to 125	SE1450
0.4	75	-55 to 125	SE1470
0.4	75	-55 to 125	
0.4	75	-55 to 125	
0.4	75	-55 to 125	SE1450
0.4	75	-55 to 125	SE1470
0.4	75	-55 to 125	
0.4	75	-55 to 125	
0.4	125	-55 to 125	SE2460
0.4	125	-55 to 125	SE2470
0.4	125	-55 to 125	SV2637-001
0.4	125	-55 to 125	
0.4	150	-55 to 125	SE3450/5450
0.4	150	-55 to 125	SE3455/5455
0.4	150	-55 to 125	SE3470/5470
0.4	150	-55 to 125	SV5637-001
0.4	150	-55 to 125	
0.4	150	-55 to 125	SE3450/5450
0.4	150	-55 to 125	SE3455/5455
0.4	150	-55 to 125	SE3470/5470
0.4	150	-55 to 125	SV5637-001
0.4	150	-55 to 125	
0.4	70	-40 to 85	SEP8505
0.4	70	-40 to 85	SEP8705
0.4	70	-40 to 85	
0.4	70	-40 to 85	
0.4	70	-40 to 85	
0.4	70	-40 to 85	
0.4	70	-40 to 85	
0.4	100	-40 to 85	SEP8506
0.4	100	-40 to 85	SEP8706
0.4	100	-40 to 85	
0.4	100	-40 to 85	

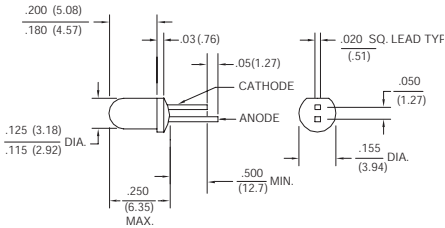


SDP8405

封装外形尺寸


所有尺寸单位为英寸 (毫米)

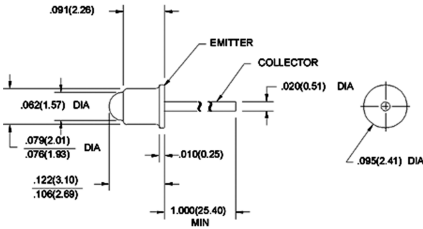


SD1400-xxx

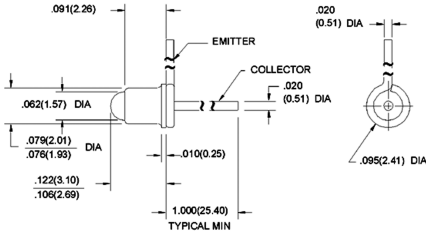


SD1440-xxxL

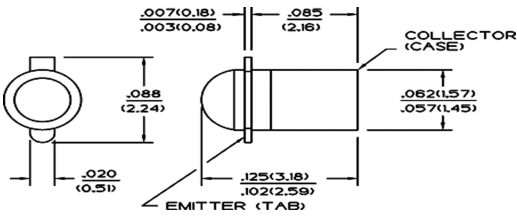


SD2440

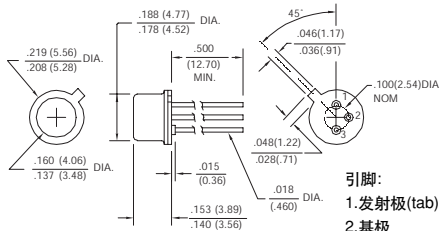

SD3443

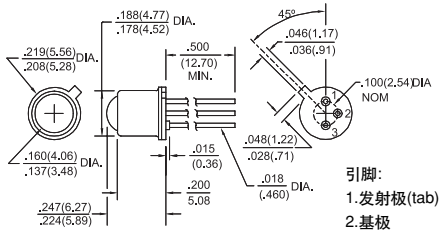

SD5443

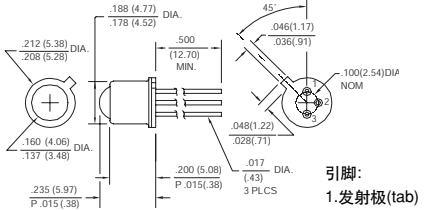

SD5491