

Ordering Information

Specify Part Number as follows:

Flange	Part Number			
Round	HDNS-2100			
Rectangular	HDNS-2100 #001			

Minimum order quantity of 1000.


Description

The HDNS-2100 Solid-State Optical Mouse Lens is designed for use with Agilent Optical Mouse Sensors and the illumination subsystem provided by the HDNS-2200 or HDNS-2200 #001 LED Assembly Clip and the HLMP-ED80 LED. Together with the LED, the HDNS-2100 provides

the directed illumination and optical imaging necessary for proper operation of the Optical Mouse Sensor. The HDNS-2100 is a precision molded optical component and should be handled with care to avoid scratching of the optical surfaces.


Outline Drawings


HDNS-2100

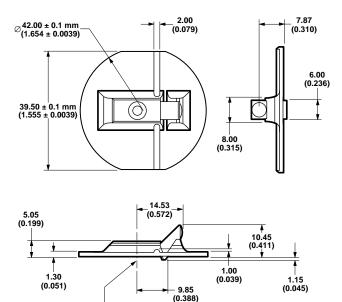

OPTICAL AXIS

HDNS-2100 #001

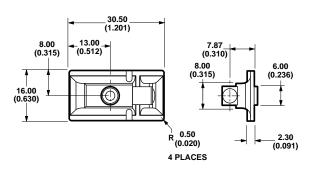



NOTES:

- 1. DIMENSIONS IN MILLIMETERS (INCHES).
- 2

TOLERANCE IS ± 0.2 mm (± 0.0079 IN.) EXCEPT WHERE NOTED. THERE IS ALSO A FLASH TOLERANCE OF -0, +0.2 mm ON THE FLANGE. 3.



Agilent Technologies

Mechanical Assembly Requirements

OBJECT SURFACE

Lens Design Optical Performance Specifications

All specifications are based on the Mechanical Assembly Requirements.

Symbol

NA

λ

Figure 2. Optical system assembly diagram.

Numerical Aperture

Design Wavelength

Object to Image Distance

Magnification

Depth of Field

	Symbol	Min.	Typical	Max.	Units	Conditions
Distance from Object Surface to Lens Reference Plane	А	2.3	2.4	2.5	mm	
Distance from Mouse Sensor Lid Surface to Object Surface	В		7.45		mm	Sensor lid must be in contac with lens housing surface
Lateral Distance from Center of Aperture Stop to Center of Lens Surface	С		0	0.20	mm	Aperture stop should self- center on lens
MOUSE SENSOR	f	BOT TOP S	TOM SIDE			NS PRISM BOTTOM SI

PRISM

I ENS

THE FLANGE SURFACE. 2. BOTTOMSIDE LOGO EXTENDS 0.1 mm

BELOW THE SURFACE.

Conditions

 $\lambda = 639 \text{ nm}$

OF THE LENS.

TOPSIDE LOGO EXTENDS 0.2 mm ABOVE

BOTTOMSIDE LOGO IS EITHER LEFT SIDE,

Image at nominal location

AS SHOWN AS ABOVE, OR PRISM SIDE

NOTES:

3.

Units

nm

mm

mm

mm

Lens Material* Index of Refraction Ν 1.5800 /1.5818 1.5840 DOF ± 0.5 Field Coverage Radius 1.00 * Lens material is polycarbonate. Cyanoacrylate based adhesives should not be used as they will cause lens material deformation.

Min.

0.1

0.85

8.735

Mounting Instructions for the HDNS-2100 Lens to the Base Plate

An IGES format drawing file with design specifications for mouse base plate features is available? These features are useful in maintaining proper positioning and alignment of the HDNS-2100 when used with the Agilent Optical Mouse Sensor. This file can be obtained by contacting your local sales representative.

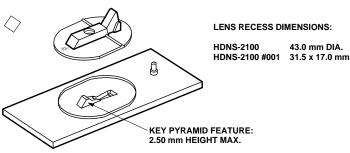


Figure 3. Logo locations

Typical

0⁄.13

1.00

639


8.823

Max.

0.16

1.15

8.911



www.semiconductor.agilent.com Data subject to change. Copyright © 2001 Agilent Technologies, Inc. April 25, 2001 Obsoletes 5988-2271EN 5988-2835EN



Agilent Technologies