

SG - 302

The SG - 302 reflective sensor for paper sensing combine high - output GaAs IRED with high sensitivity photodiode. It is most applicable to tilt sensor.

FEATURES


- High performance
- High - speed response

APPLICATIONS

- Tilt sensor
- LD player

DIMENSIONS

(Unit : mm)

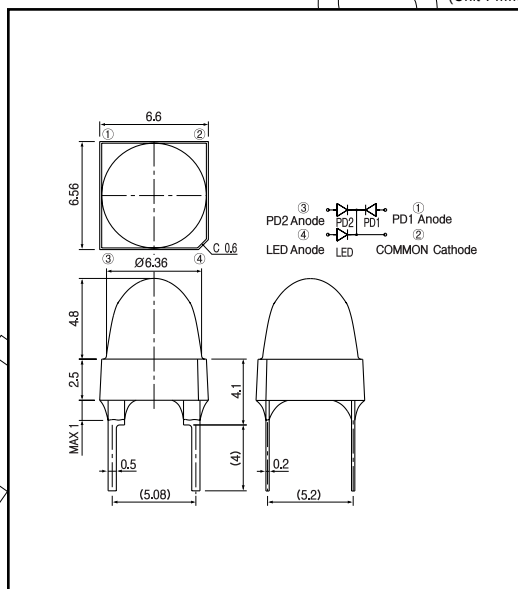

MAXIMUM RATINGS

(Ta=25)

	Item	Symbol	Rating	Unit
Emitter	Forward current	I_F	30	mA
	Reverse voltage	V_R	5	V
	Power dissipation	P_D	45	mW
	Reverse voltage	V_R	20	V
Detector	Power dissipation	P_D	30	mW
	Operating temp.	$T_{opr.}$	- 10 ~ + 70	
	Storage temp.	$T_{stg.}$	- 30 ~ + 80	
	Soldering temp.	$T_{sol.}$	260 ^{*1}	

*1. For MAX. 5 seconds at the position of 1mm from the package

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25)

	Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Emitter	Forward voltage	V_F	$I_F = 10\text{mA}$		1.17	1.45	V
	Peak wavelength	λ_p	$I_F = 10\text{mA}$		940		nm
	Spectral bandwidth 50%	$\Delta\lambda$	$I_F = 10\text{mA}$		50		nm
Detector	Sensitivity	S	$\lambda = 900\text{nm}, V_F = 5\text{V}$		0.5		μA
	Dark current	I_D	$E_V = 0\text{kV}_R = 10\text{V}$			0.2	μA
	Max sens.wavelength	λ_p			900		nm
	Switching speed	t_r	$V_F = 0\text{V}, R_L = 10\text{k}\Omega$		0.6		μA

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25)

Item			Symbol	Conditions	Min.	Typ.	Max.	Unit.
Combination characteristics	Zero offset		θ_{off}	$h=h_{\text{mm}}, \Psi=0$	- 2.5		2.5	deg.
	Offset change	Temperature	$\Delta \theta_{\text{off}}$	$h=h_{\text{mm}}, \Psi=0$		± 0.1		deg.
		Distance		$h=h \pm 2\text{mm}, \Psi=0$	- 0.15		0.15	deg.
		Tangential inclination		$h=h_{\text{mm}}, \Psi= \pm 3[\text{deg.}]$	- 0.10		0.1	deg.
Combination characteristics	Absolute sensitivity		$V(a - b)/\theta$	A Rank	0.41		0.64	V/deg.
				B Rank	0.60		0.95	V/deg.
				C Rank	0.89		1.42	V/deg.
	Sensitivity temperature characteristic		V_r	$h=h_{\text{mm}}, \Psi=0$		± 30	%	
	Sensitivity pifference		V_s	$h=h_{\text{mm}}, \Psi=0$	- 15		15	%
	Total light		$V(a+b)$	$h=h_{\text{mm}}$	0.8			V
			$V_{\text{Max.}}$				5.5	V
	Stray light(sun)		V_{c1}				140	
	Stray light(difference)		V_{c2}	No incident Light			18	mV
				$h=h_{\text{mm}}, \Psi=0$	± 4			deg.
Error peak angle			$h=h_{\text{mm}}, \Psi=0$	± 2			deg.	

* $h_0 = 9.2\text{mm}$

*Measurement Circuit : Refer to Figure 1.

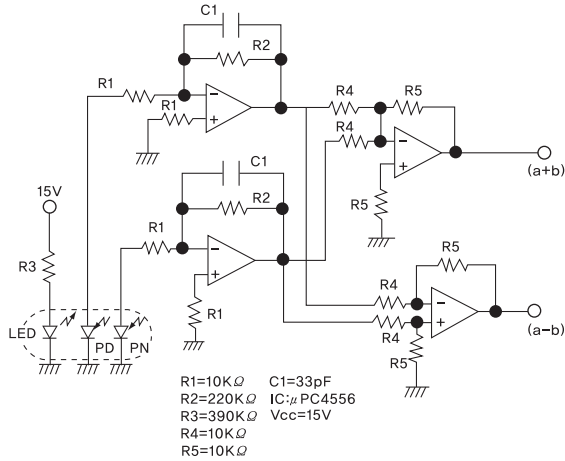


Figure 1