

TOSHIBA INFRARED LED GaAs INFRARED EMITTER

TLN103A

INFRARED LED FOR PHOTO SENSOR

Unit in mm

OPTO-ELECTRONIC SWITCH

SELECTOR

TAPE, CARD READERS

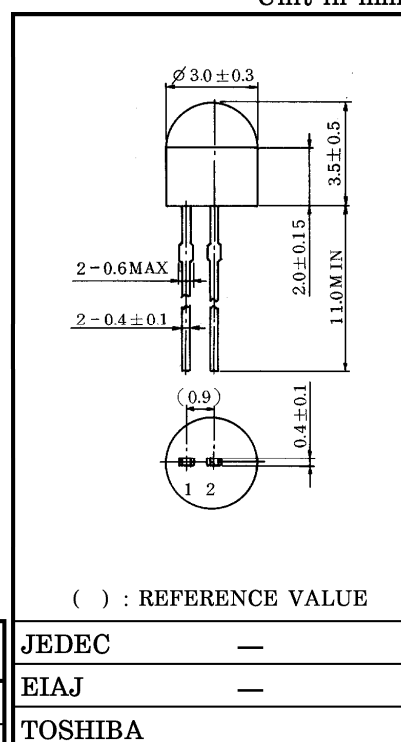
INFRARED RAYS APPLIED EQUIPMENT

- Wide half value angle : $\theta_{\frac{1}{2}} = \pm 80^\circ$ (TYP.)
- Excellent linearity of radiant power and modulation by pulse operation and high frequency is possible.
- The same external shape as Photo Transistors TPS603A.
- Maximum distance when used as a photo sensor :

At DC drive $\approx 5\text{mm}$	}	When TPS603A IL $\approx 100\mu\text{A}$
At pulse drive $\approx 30\text{mm}$		

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Forward Current	I_F	60	mA
Pulse Forward Current (Note)	I_{FP}	1	A
Reverse Voltage	V_R	5	V
Forward Current Derating ($T_a > 25^\circ\text{C}$)	$\Delta I_F / ^\circ\text{C}$	-0.8	mA / $^\circ\text{C}$
Operating Temperature Range	T_{opr}	$-20 \sim 75$	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	$-30 \sim 100$	$^\circ\text{C}$

(Note) Pulse Width $\leq 100\mu\text{s}$, Repetitive Frequency = 100Hz

() : REFERENCE VALUE

JEDEC	—
EIAJ	—
TOSHIBA	

Weight : 0.08g (TYP.)

PIN CONNECTION



1. ANODE
2. CATHODE

OPTO-ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	V_F	$I_F = 10\text{mA}$	1.00	1.15	1.30	V
Reverse Current	I_R	$V_R = 5\text{V}$	—	—	10	μA
Radiant Intensity	I_E	$I_F = 20\text{mA}$	0.5	1.0	—	mW / sr
Radiant Power	P_o	$I_F = 20\text{mA}$	—	2.5	—	mW
Half Value Angle	$\theta_{\frac{1}{2}}$	$I_F = 20\text{mA}$	—	± 80	—	$^\circ$
Capacitance	C_T	$V_R = 0, f = 1\text{MHz}$	—	30	—	pF
Peak Emission Wavelength	λ_P	$I_F = 20\text{mA}$	—	940	—	nm
Spectral Line Half Width	$\Delta\lambda$	$I_F = 20\text{mA}$	—	50	—	nm

961001EAC2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

PRECAUTION

Please be careful of the followings.

1. Soldering temperature : 260°C MAX.
Soldering time : 3s MAX.
(Soldering portion of lead : above 2mm from the body of the device)
2. If the lead is formed, the lead should be formed at a distance of 2mm from the body of the device.
Soldering shall be performed after lead forming.

961001EAC2'

- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

