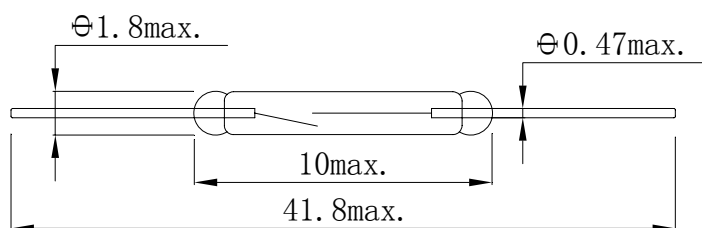


MKA-10110


Contact form	1A
Contact material	Ru
Switching power	10W (max.)
Switching voltage	100V (max.)
Switching current	0.5 A (max.)
Pull in	8 – 35 AT
Drop out	4 AT min.
Contact resistance	0.1 Ohm max.
Breakdown voltage	150 V dc min.
Insulation resistance	1 x 10 ⁹ Ohm min.
Operate time	0.5 ms max.
Release time	0.3 ms max.
Capacitance	0.5 pF max.
Resonant frequency	5000 Hz min.
Operate temperature range	- 60 to + 125°C
High humidity at T=35°C	98% max.
Test coil:	
Number of turns	5000
Resistance	580 Ohm