


SOLDERABLE CHIP SERIES

PLANAR DIFFUSED SILICON PHOTODIODES

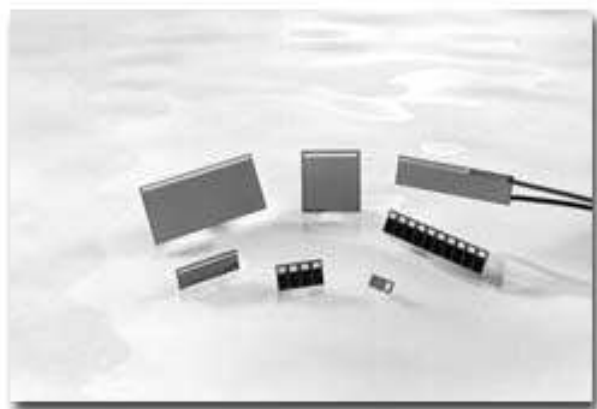

APPLICATIONS

- Solar Cells
- Low Cost Light Monitoring
- Diode Laser Monitoring
- Low Capacitance


FEATURES

- Large Active Areas
- Various Sizes
- High Shunt

The Solderable photodiode chip series offer a low cost approach to applications requiring large active area photodetectors with or without flying leads for ease of assembly and / or situations where the detector is considered “disposable”. They have low capacitance, moderate dark currents, wide dynamic ranges and high open circuit voltages. These detectors are available with two 3" long leads soldered to the front (anode) and back (cathode). There are two types of photodiode chips available. “Photoconductive” series, (S-XXCL) for low capacitance and fast response and “Photovoltaic” series (S-XXVL) for low noise applications.

All of the devices are also available in chip form without any leads. For ordering subtract suffix ‘L’ from the model number, e.g. S-100C.

For large signal outputs, the detectors can be connected directly to a current meter or across a resistor for voltage measurements. Alternately, the output can be measured directly with an oscilloscope or with an amplifier. **Please refer to the “Photodiode Characteristics” section for further details.**

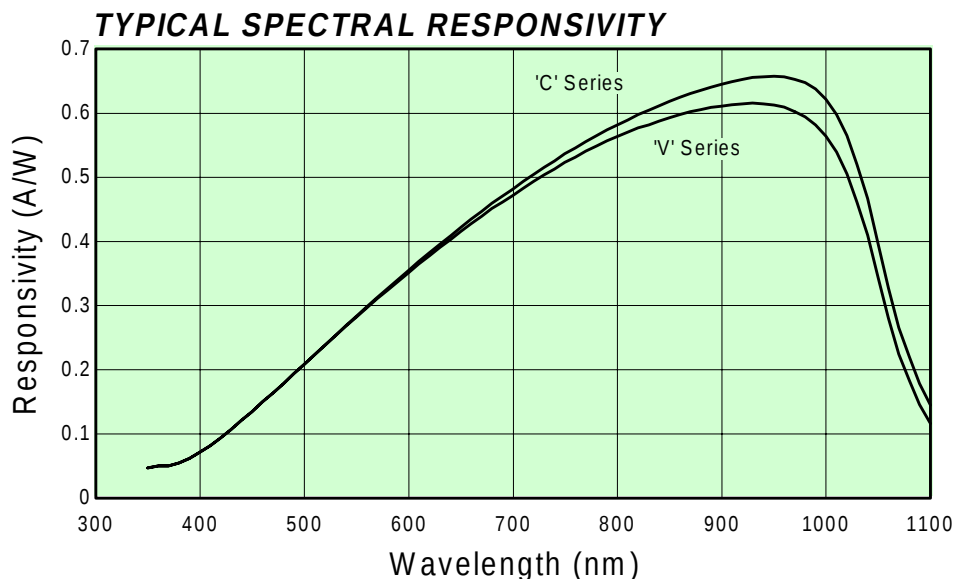

Model No.	Active Area		Chip size mm (inches)	Short Circuit Current (mA)	Open Circuit Voltage (mV)	Shunt Resistance (M-ohm)	Dark Current (nA)	Capacitance (pF)	
	Area mm ² (inches ²)	Dimensions mm (inches)		100 mW/cm ² 2850 °K	100 mW/cm ² 2850 °K	-10 mV	-5 V	0 V	-5 V
				typ	min	min	max	typ	typ
S-4CL §	4.7 (0.007)	1.7 x 2.8 (0.07 x 0.11)	1.9 x 4.1 (0.08 x 0.16)	0.75	400	---	20	---	15
S-4VL				0.65		10	---	370	---
S-10CL	9.6 (0.015)	2.3 x 4.2 (0.09 x 0.17)	2.5 x 5.1 (0.10 x 0.20)	1.5		---	40	---	30
S-10VL				1.4		8	---	750	---
S-25CL	25.8 (0.04)	5.1 x 5.1 (0.20 x 0.20)	5.5 x 6.0 (0.22 x 0.24)	4.0		---	100	---	95
S-25VL				3.8		5	---	2100	---
S-25CRL	25.4 (0.039)	2.5 x 10.1 (0.10 x 0.40)	3.4 x 10.5 (0.13 x 0.41)	4.0		---	100	---	95
S-25VRL				3.8		5	---	2100	---
S-50CL	51.0 (0.079)	2.5 x 20.3 (0.10 x 0.80)	3.4 x 20.6 (0.13 x 0.81)	9.0		---	300	---	200
S-50VL				8.0		3	---	4000	---
S-80CL	82.6 (0.128)	4.1 x 20.1 (0.16 x 0.79)	5.2 x 20.4 (0.21 x 0.80)	12.0		---	500	---	300
S-80VL				11.0		2	---	6000	---
S-100CL	93.4 (0.145)	9.7 x 9.7 (0.38 x 0.38)	10.5 x 11.00 (0.42 x 0.43)	14.0		---	600	---	375
S-100VL				13.0		1.0	---	8500	---
S-120CL	105.7 (0.164)	4.5 x 23.5 (0.18 x 0.93)	5.5 x 23.9 (0.22 x 0.94)	17.0		---	800	---	450
S-120VL				15.0		0.5	---	10000	---
S-200CL	189.0 (0.293)	9.2 x 20.7 (0.36 x 0.81)	10.2 x 21.0 (0.40 x 0.83)	27.0		---	1200	---	750
S-200VL				25.0		0.2	---	17000	---

§ ALL OF THE ABOVE BARE CHIPS ARE PROVIDED WITH TWO 3" LONG 29-30 AWG INSULATED COLOR CODED LEADS ATTACHED TO THE FRONT FOR ANODE (RED) AND TO THE BACK FOR CATHODE (BLACK). THEY ARE ALSO AVAILABLE IN CHIP FORM ONLY (LEADLESS). FOR ORDERING SUBTRACT SUFFIX L FROM THE MODEL NUMBER, I.E. S-100C.

All chip dimensions in inches.

