
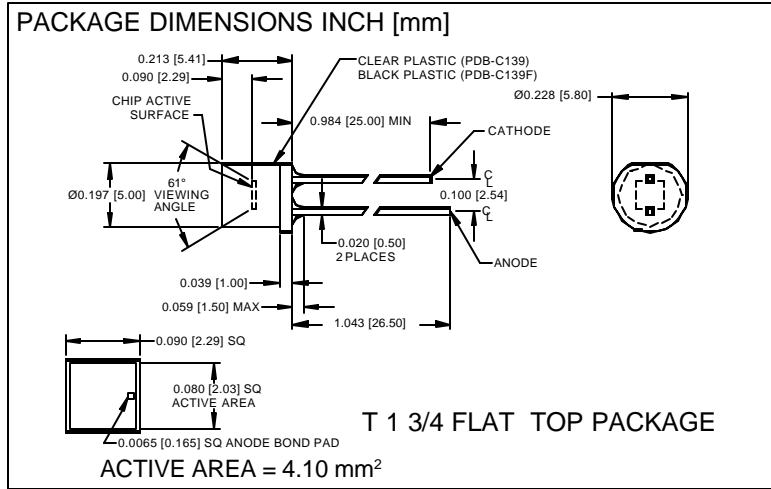


# PHOTONIC DETECTORS INC.

## Silicon Photodiode, Blue Enhanced Photoconductive Type PDB-C139 , with daylight filter Type PDB-C139F

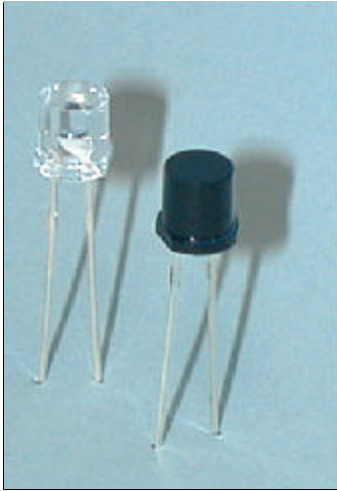

### FEATURES

- Flat top T 1 3/4
- High speed, 1 nS (tr)
- Low cost
- Large active area

**DESCRIPTION:** The **PDB-C139** detector is a 4.10 mm<sup>2</sup> planar pin photodiode packaged in a T 1 3/4, flat top, water clear plastic housing. Designed for high speed, low capacitance, photoconductive applications. The **PDB-C139F** includes a daylight filter.

### APPLICATIONS


- Smoke detectors
- Light pen detectors
- TV & VCR remotes

### ABSOLUTE MAXIMUM RATING (TA=25°C unless otherwise noted)

SYMBOL	PARAMETER	MIN	MAX	UNITS
V <sub>BR</sub>	Reverse Voltage		50	V
T <sub>STG</sub>	Storage Temperature	-40	+100	°C
T <sub>O</sub>	Operating Temperature Range	-40	+80	°C
T <sub>S</sub>	Soldering Temperature*		+260	°C
I <sub>L</sub>	Light Current		0.5	mA

\*1/16 inch from case for 3 secs max

### SPECTRAL RESPONSE

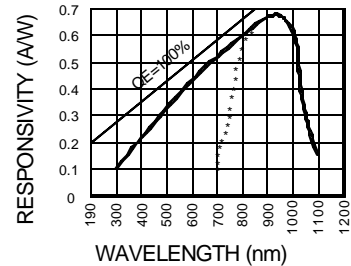

### ELECTRO-OPTICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I <sub>SC</sub>	Short Circuit Current	H = 100 fc, 2850 K	45	67		mA
I <sub>D</sub>	Dark Current	H = 0, V <sub>R</sub> = 10 V		5	30	nA
R <sub>SH</sub>	Shunt Resistance	H = 0, V <sub>R</sub> = 10 mV	100	500		MΩ
TC R <sub>SH</sub>	RSH Temp. Coefficient	H = 0, V <sub>R</sub> = 10 mV		-8		% / °C
C <sub>J</sub>	Junction Capacitance	H = 0, V <sub>R</sub> = 10 V*		18	25	pF
λ <sub>range</sub>	Spectral Application Range (without daylight filter)**		400		1100	nm
λ <sub>p</sub>	Spectral Response - Peak			950		nm
V <sub>BR</sub>	Breakdown Voltage	I = 10 mA	15	25		V
NEP	Noise Equivalent Power	V <sub>R</sub> = 10 V @ Peak		2x10 <sup>-14</sup>		W/√Hz
tr	Response Time	RL = 1 KΩ V <sub>R</sub> = 10 V		50		nS

Information in this technical data sheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice. \*f = 1 MHz, \*\* daylight filter= 700 - 1100 nm