


PHOTONIC DETECTORS INC.

Silicon Photodiode, Blue Enhanced Photoconductive Quadrant Type PDB-C207

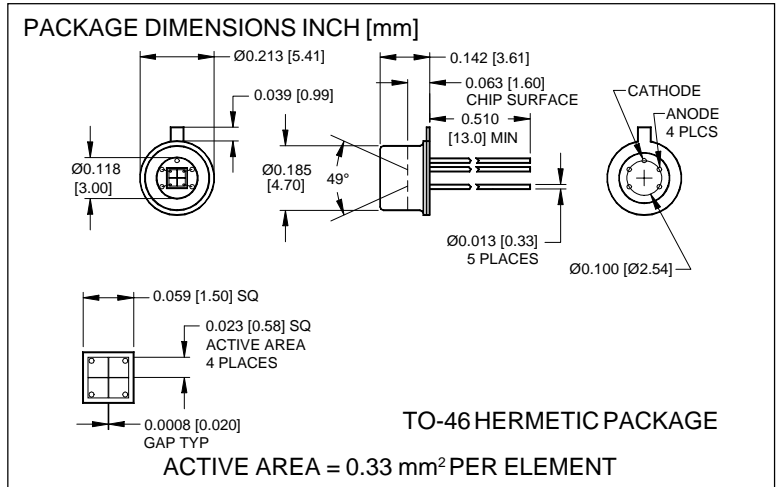

FEATURES

- High speed
- Low capacitance
- Blue enhanced
- Low dark current

DESCRIPTION

The **PDB-C207** is a silicon, pin planar diffused, blue enhanced quadrant photo-diode. Ideal for high speed photoconductive applications. Packaged in a hermetic TO-46 metal can with a flat window.

APPLICATIONS


- Optical alignment
- Position sensing
- Edge sensing
- Instrumentation

ABSOLUTE MAXIMUM RATING (TA=25°C unless otherwise noted)

| SYMBOL | PARAMETER | MIN | MAX | UNITS |
|------------------|-----------------------------|-----|------|-------|
| V _{BR} | Reverse Voltage | | 100 | V |
| T _{STG} | Storage Temperature | -30 | +100 | °C |
| T _O | Operating Temperature Range | -20 | +80 | °C |
| T _S | Soldering Temperature* | | +240 | °C |
| I _L | Light Current | | 0.5 | mA |

*1/16 inch from case for 3 secs max

SPECTRAL RESPONSE

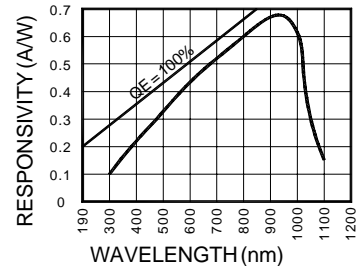

ELECTRO-OPTICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

| SYMBOL | CHARACTERISTIC | TEST CONDITIONS | MIN | TYP | MAX | UNITS |
|--------------------|-----------------------------------|---------------------------------|-----|---------------------|------|--------|
| I _{SC} | Short Circuit Current | H = 100 fc, 2850 K | 1.5 | 2.2 | | μA |
| I _D | Dark Current | H = 0, V _R = 1 V | | 1 | 5 | nA |
| R _{SH} | Shunt Resistance | H = 0, V _R = 10 mV | 100 | 500 | | MΩ |
| TC _{RSH} | R _{SH} Temp. Coefficient | H = 0, V _R = 10 mV | | -8 | | % / °C |
| C _J | Junction Capacitance | H = 0, V _R = 10 V | | 10 | | pF |
| λ _{range} | Spectral Application Range | Spot Scan | 350 | | 1100 | nm |
| λ _p | Spectral Response - Peak | Spot Scan | | 950 | | nm |
| V _{BR} | Breakdown Voltage | I = 10 μA | 30 | 75 | | V |
| NEP | Noise Equivalent Power | V _R = 10 V @ Peak | | 6x10 ⁻¹³ | | W/√Hz |
| tr | Response Time | RL = 1 KΩ V _R = 10 V | | 100 | | nS |

Information in this technical data sheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.

[FORM NO. 100-PDB-C207 REV AJ]