


Si photodiode S6428-01, S6429-01, S6430-01, S7505-01

RGB color sensor

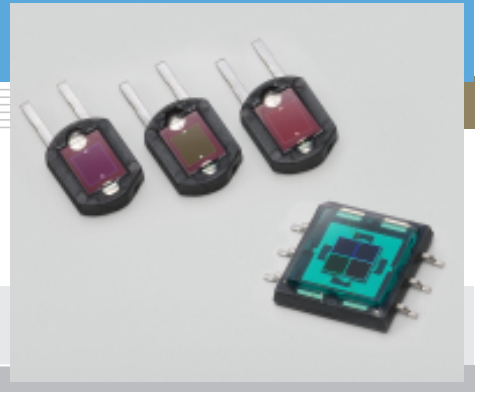

S6428-01, S6429-01 and S6430-01 are color sensors designed to respectively detect monochromatic colors of blue ($\lambda_p=460$ nm), green ($\lambda_p=540$ nm) and red ($\lambda_p=660$ nm).

S7505-01 use a 3-channel (RGB) photodiode having blue, green and red sensitivities, and is molded into a surface-mountable package.

Features

S6428-01, S6429-01, S6430-01

- Plastic package (6 × 8 mm)
- Spectral response range
S6428-01: 400 to 540 nm ($\lambda_p=460$ nm)
S6429-01: 480 to 600 nm ($\lambda_p=540$ nm)
S6430-01: 590 to 720 nm ($\lambda_p=660$ nm)
- Insensitive to near IR range
- High sensitivity
S6428-01: 0.22 A/W Typ. ($\lambda=\lambda_p$)
S6429-01: 0.27 A/W Typ. ($\lambda=\lambda_p$)
S6430-01: 0.45 A/W Typ. ($\lambda=\lambda_p$)
- Low dark current

S7505-01

- 3 ch (RGB) Si photodiode
- Surface mountable plastic package (9 × 9.6 mm)
- High sensitivity

Applications

- White balance adjustment
- Color identification
- Projector and TV brightness level detection
- Color control
- Light source color temperature detection

General ratings / Absolute maximum ratings


Type No.	Dimensional outline	Active area size (mm)	Effective active area (mm ²)	Absolute maximum ratings		
				Reverse voltage VR Max. (V)	Operating temperature Topr (°C)	Storage temperature Tstg (°C)
S6428-01	①	2.4 × 2.8	6.7	10	-10 to +60	-20 to +70
S6429-01						
S6430-01						
S7505-01	②	Green, red: 1.5 × 1.5 Blue : 1.5 × 1.5 (2 elements)	Green, red: 2.25 Blue : 4.5			

Electrical and optical characteristics (Typ. Ta=25 °C, unless otherwise noted)


Type No.	Spectral response range λ (nm)	Peak sensitivity wavelength λ_p (nm)	Photo sensitivity S $\lambda=\lambda_p$ (A/W)	Dark current ID VR=1 V		Temp. coefficient of ID (times/°C)	Rise time tr VR=0 V RL=1 kΩ 10 to 90 % (μs)	Terminal capacitance Ct VR=0 V f=10 kHz		Spectral response half width FWHM *2 (nm)
				Typ. (pA)	Max. (pA)			Typ. (pF)	Max. (pF)	
S6428-01	400 to 540	460	0.22	5	20	1.12	0.5	200	400	90
S6429-01	480 to 600	540	0.27							70
S6430-01	590 to 720	660	0.45							90
S7505-01	Blue	400 to 540	460	10 *1	200 *1	1.12	0.5	150	300	90
	Green	480 to 600	540							60
	Red	590 to 720	620							70

*1: All elements.

*2: Defined as shown in the figure at right.




■ Spectral response (S6428-01, S6429-01, S6430-01)

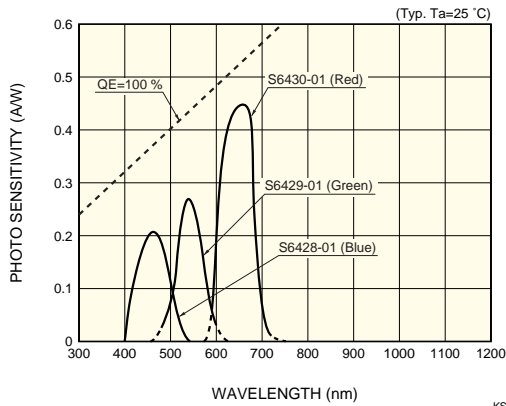


KSPDB0141EC

■ Spectral response (S7505-01)

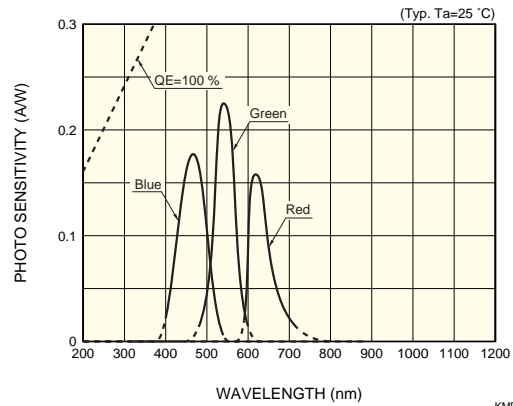


KMPDB0217EA

■ Dark current vs. reverse voltage

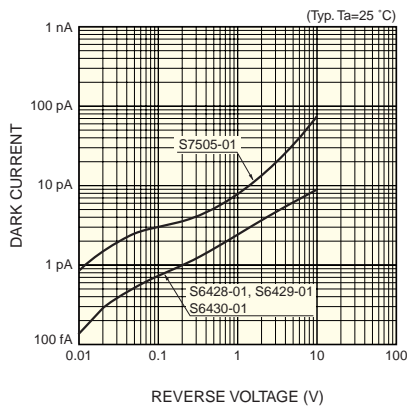

KSPDB0142EC


■ Terminal capacitance vs. reverse voltage

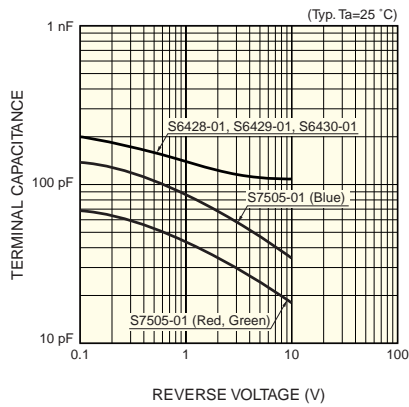

KSPDB0143EC


■ Dimensional outlines (unit: mm)

① S6428-01, S6429-01, S6430-01

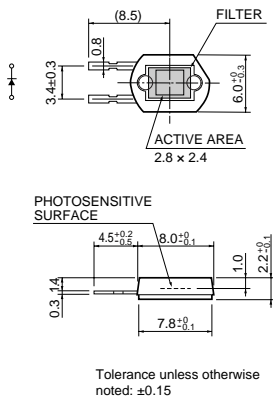

KSPDA0056EA

② S7505-01

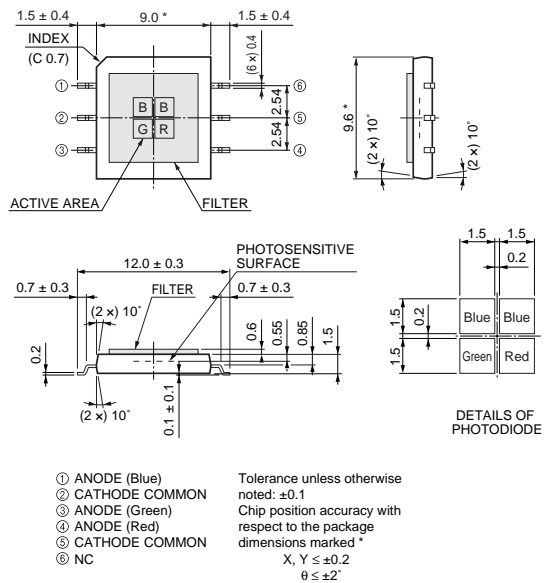

KMPDA0073ED

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation, 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741