

# SIDE-LOOK PACKAGE PIN PHOTODIODE


# MID-7341C

## Description

The MID-7341C is a photodiode mounted in water clear plastic package and suitable for the variety wavelength.

## Package Dimensions

Unit : mm (inches )

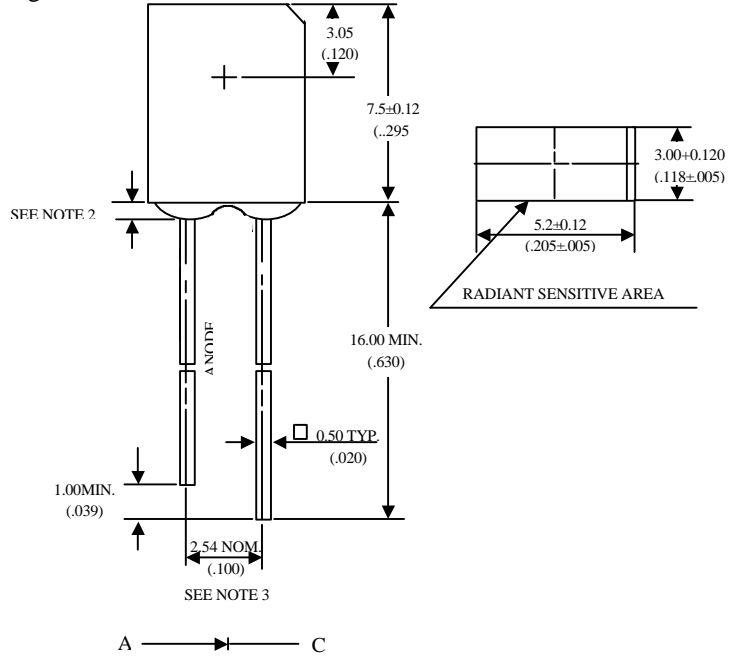

## Features

- High photo sensitivity
- Low junction capacitance
- High cut-off frequency
- Fast switching time

Notes :

1. Tolerance is  $\pm 0.25$  mm (.010") unless otherwise noted.
2. Protruded resin under flange is 1.0 mm (.040") max.
3. Lead spacing is measured where the leads emerge from the package.

## Absolute Maximum Ratings

@  $T_A=25^\circ\text{C}$

Parameter	Maximum Rating	Unit
Power Dissipation	100	mW
Operating Temperature Range	$-55^\circ\text{C}$ to $+100^\circ\text{C}$	
Storage Temperature Range	$-55^\circ\text{C}$ to $+100^\circ\text{C}$	
Lead Soldering Temperature	$260^\circ\text{C}$ for 5 seconds	

**UNI**

Unity Opto Technology Co., Ltd.

02/04/2002

## Optical-Electrical Characteristics

@ T<sub>A</sub>=25°C

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	I <sub>R</sub> =0.1mA Ee=0	V <sub>(BR)R</sub>	30			V
Reverse Dark Current	V <sub>R</sub> =10V Ee=0	I <sub>D</sub>			30	nA
Open Circuit Voltage	λ=940nm Ee=0.1mW/cm <sup>2</sup>	V <sub>OC</sub>		350		mV
Rise Time	V <sub>R</sub> =10V λ=940nm R <sub>L</sub> =50Ω	T <sub>r</sub>		50		nsec
Fall Time		T <sub>f</sub>		50		
Light Current	V <sub>R</sub> =5V, λ=940nm Ee=0.1mW/cm <sup>2</sup>	I <sub>L</sub>		9		μA
Total Capacitance	V <sub>R</sub> =3V, f=1MHz Ee=0	C <sub>T</sub>		25		pF

## Typical Optical-Electrical Characteristic Curves

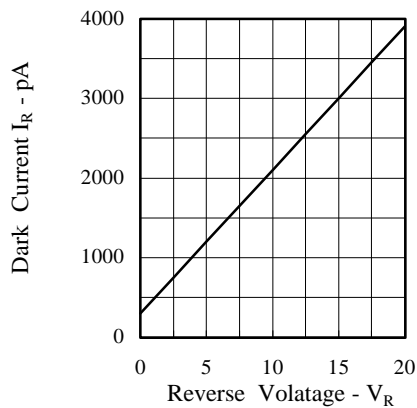


FIG.1 DARK CURRENT VS REVERSE VOLTAGE  
TEMP=25°C, Ee=0 mW/cm<sup>2</sup>

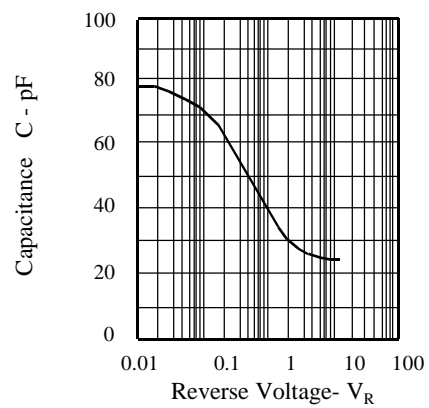


FIG.2 CAPACITANCE VS. REVERSE VOLTAGE  
F=1MHz, Ee=0mW/cm<sup>2</sup>

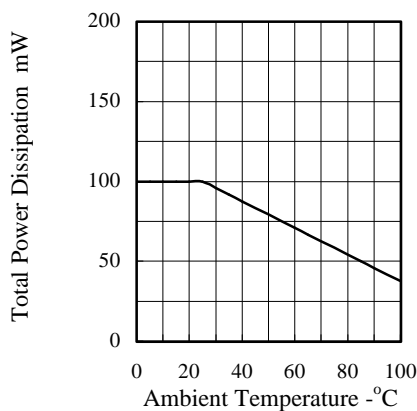


FIG.3 TOTAL POWER DISSIPATION  
VS. AMBIENT TEMPERATURE

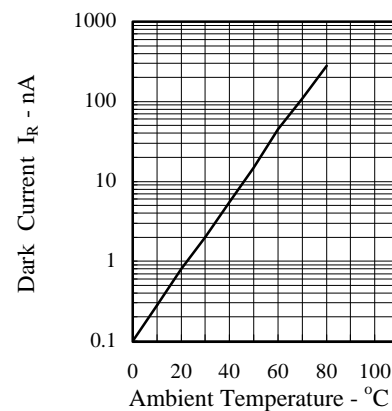


FIG.4 DARK CURRENT VS AMBIENT TEMPERATURE  
V<sub>R</sub>=10, Ee=0 mw/cm<sup>2</sup>

Typical Optical-Electrical Characteristic Curves

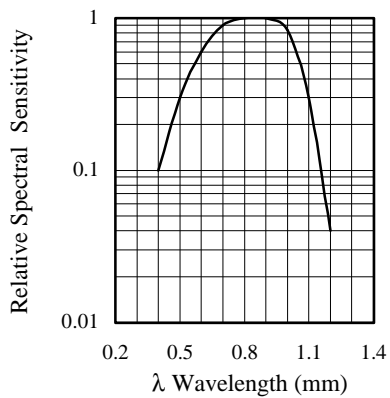


FIG.5 RELATIVE SPECTRAL SENSITIVITY VS. WAVELENGTH

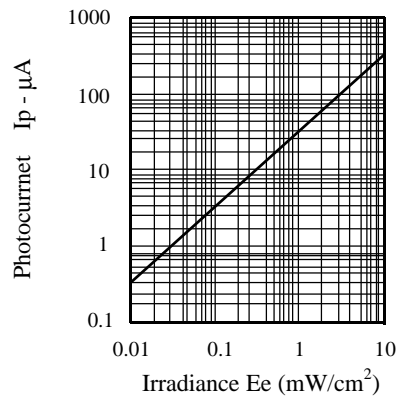


FIG.6 PHOTOCURRENT VS. IRRADIANCE

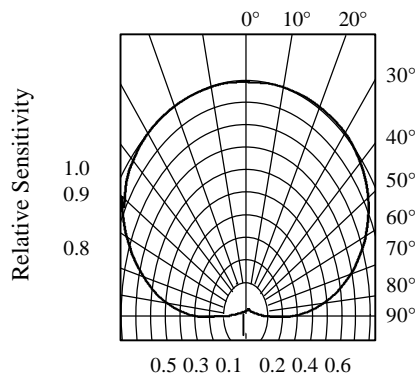


FIG.7 SENSITIVITY DIAGRAM