

Si APD

S9717 series

High reliability, surface-mount ceramic package



S9717 series are Si APD (avalanche photodiodes) encapsulated in a surface-mount ceramic package that ensures high reliability in the same wide operating temperature range (-20 to +85 °C) as metal package devices. S9717 series also allows downsizing of equipment in various photometric application fields.

Features

- Surface-mount package with high reliability equivalent to metal package
(No dark current increase after high temperature/humidity testing at 85 °C, 85 % for 1000 hours.)
- Small, thin package: 3.5 × 4.0 mm
- S9717-02K/-05K: Flat glass window
S9717-05L: Lens glass window

Applications

- Rangefinder
- Laser radar
- Spatial light transmission

General ratings

Parameter	S9717-02K	S9717-05K	S9717-05L	Unit
Active area size	φ0.2	φ0.5	φ0.5	mm
Window material	Borosilicate glass		Borosilicate glass, φ0.8 lens	-


Absolute maximum ratings

Parameter	Symbol	Value	Unit
Operating temperature	Topr	-20 to +85	°C
Storage temperature	Tstg	-55 to +125	°C

Electrical and optical characteristics (Typ. Ta=25 °C)


Parameter	Symbol	Condition		S9717-02K	S9717-05K	S9717-05L	Unit
Spectral response range	λ			400 to 1000			nm
Peak sensitivity wavelength	λ_p	M=100		800			nm
Photo sensitivity	S	λ =800 nm, M=1		0.5			A/W
Breakdown voltage	VBR	ID=100 μ A	Typ.	150			V
			Max.	200			
Temp. coefficient of VBR	-			0.65			V/°C
Dark current	ID	M=100	Typ.	50	100	100	pA
			Max.	500	1000	1000	
Terminal capacitance	Ct	M=100, f=1 MHz		1.5	3	3	pF
Cut-off frequency	fc	M=100, RL=50 Ω λ =800 nm, -3 dB		1000	900	900	MHz
Excess noise figure	x	M=100		0.3			-
Gain	M	λ =800 nm		100			-

Spectral response

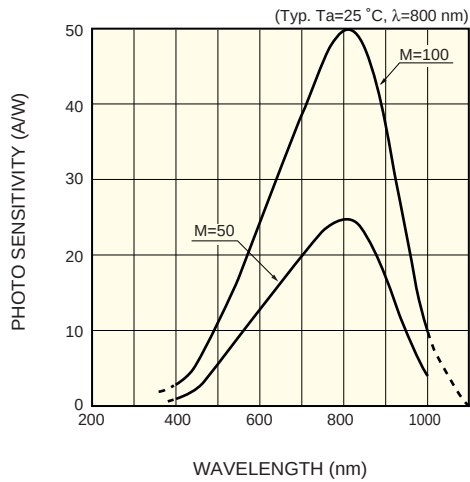


KAPDB0020EB

Dark current vs. reverse voltage

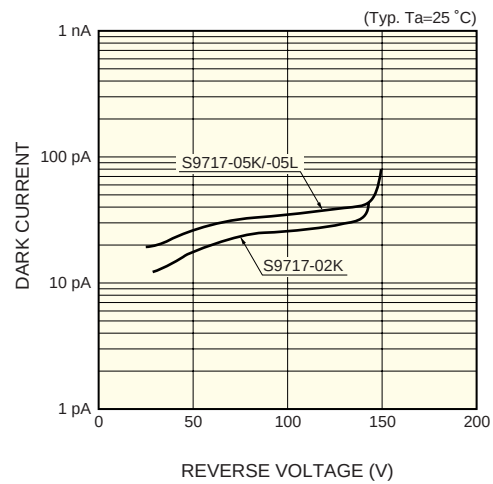


KAPDB0101EA

Gain vs. reverse voltage

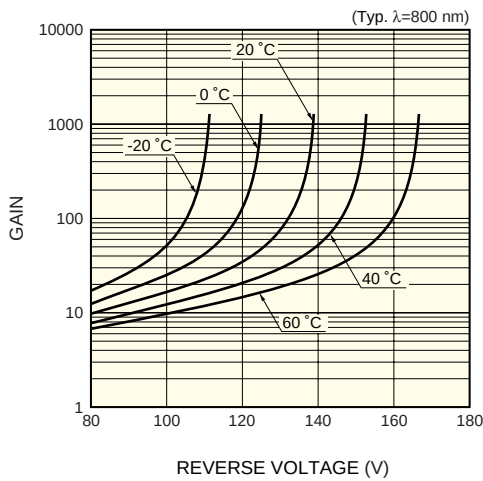


KAPDB0017EC

Dimensional outlines (unit: mm)

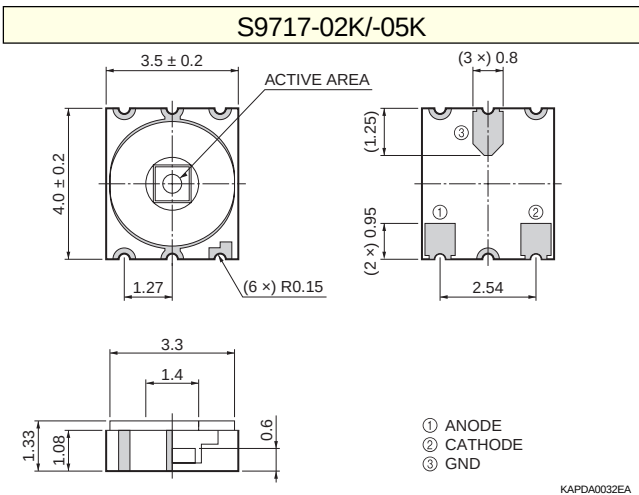

KAPDA0032EA

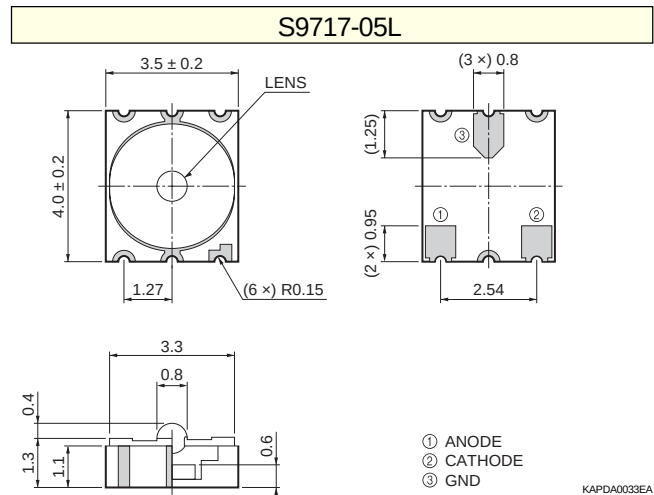

KAPDA0033EA

HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2006 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, www.hamamatsu.com

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat. No. KSPD1014E02
Mar. 2006 DN