

## Applications

- Nondispersive Infrared (NDIR) CO<sub>2</sub> detection

## Features

- Small-size sensor (TO-46 package)
  - Included ambient temperature (thermistor) sensor for compensation
  - High sensitivity
  - Fast response time
  - Low cost
- 

NDIR detectors are simple optical devices often used for gas analysis. The ZTP-135SR-G3 model consists of thermo-elements, a narrow band path (NBP) filter, a thermistor for temperature compensation and a hermetically-sealed TO-46(18) package. This NDIR thermopile detector can provide the customer with other NBP filters for analyzing various gases.



# ZTP-135SR-G3 Thermometrics CO<sub>2</sub> Detector

ZTP-135SR-G3 is a Thermometrics product. Thermometrics has joined other GE high-technology sensing businesses under a new name—GE Industrial, Sensing.



# ZTP-135SR-G3 Specifications

Parameter	Unit	Value	Condition
Chip Size	mm <sup>2</sup>	1.8 x 1.8	—
Diaphragm Size	mm <sup>2</sup>	1.4 x 1.4	—
Number of Couples	—	60	—
Active Area	mm <sup>2</sup>	0.7 x 0.7	—
Internal Resistance	kΩ	60 ±30%	@ 77°F (25°C)
Resistance T.C.	% °F (°C)	< 0.12	—
Responsitivity	V/W	62 ±30%	500K, 1 Hz
Responsitivity T.C.	% °F (°C)	-0.10	Typical
Noise Voltage	nV rms	32	R.M.S, Typical
NEP	nW/ √Hz	0.51	500K, 1 Hz, Typical
Detectivity	cn √Hz/W	1.35E + 08	500K, 1 Hz, Typical
Time Constant	ms	25	500K, 1 Hz, Typical
Operating Temperature	°F (°C)	-4°F to 212°F (-20°C to 100°C)	—
Storage Temperature	°F (°C)	-40°F to 248°F (-40°C to 120°C)	—
Thermistor Resistance Beta	kΩ K	100 ±3% 3960 ±1%	@ 77°F (25°C)
Package Type	—	TO-41	—

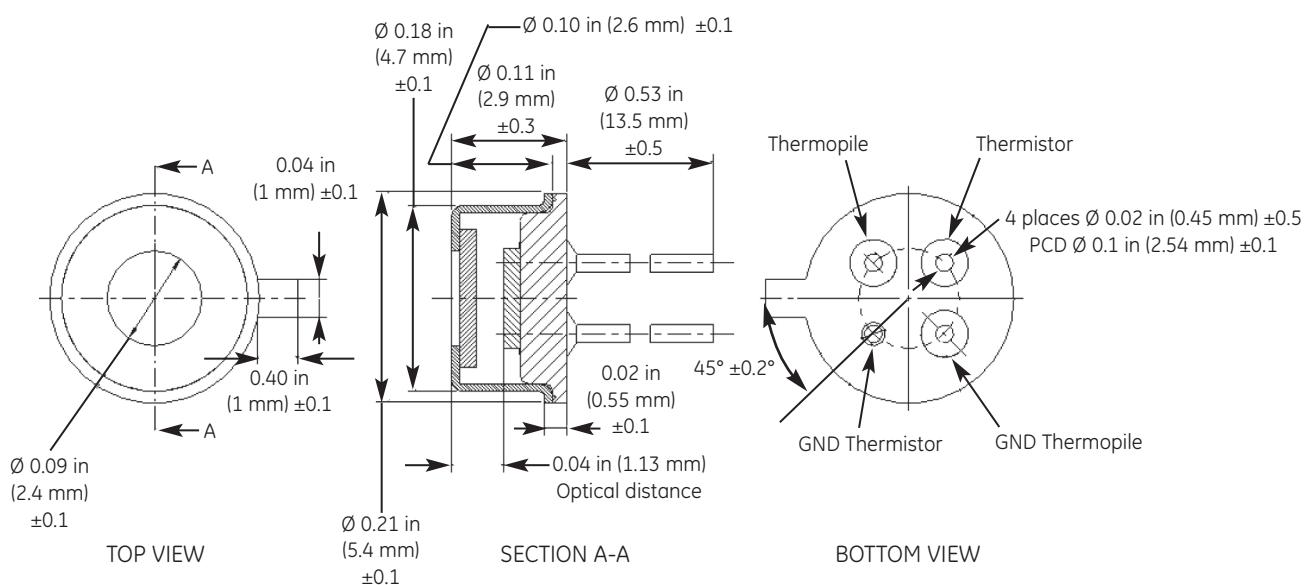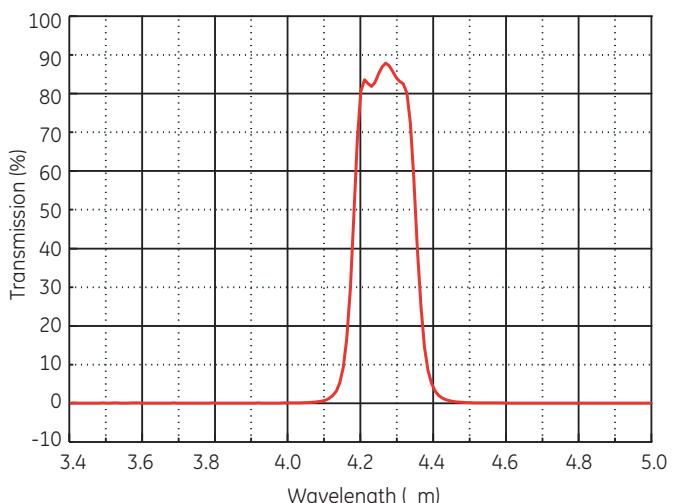

ZTP-135SR-G3 dimensions



©2005 GE. All rights reserved.  
920-160A

All specifications are subject to change for product improvement without notice. GE® is  
a registered trademark of General Electric Co.

[www.gesensing.com](http://www.gesensing.com)