

**Harvatek Surface Mount CHIP LED Data Sheet
HT-122NB5-2932**

| | | | | |
|--|-------------------------|---------------|----------------|----------------|
| Official Product | Product: HT-122NB5-2932 | | | Data Sheet No. |
| Tentative Product | ***** | | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | | Mar. 06, 2006 | Version of 1.0 | Page 1/17 |

| | |
|--|----|
| DISCLAIMER | 3 |
| PRODUCT SPECIFICATIONS | 4 |
| ATTENTION: ELECTROSTATIC DISCHARGE (ESD) PROTECTION | 4 |
| LABEL SPECIFICATIONS | 5 |
| ELECTRO-OPTICAL CHARACTERISTICS | 8 |
| PACKAGE OUTLINE DIMENSION AND | 8 |
| RECOMMENDED SOLDERING PATTERN FOR REFLOW SOLDERING | 8 |
| ABSOLUTE MAXIMUM RATINGS | 8 |
| CHARACTERISTICS CURVES | 9 |
| PACKAGING | 11 |
| TAPE DIMENSION | 11 |
| REEL DIMENSION | 12 |
| PACKING | 12 |
| DRY PACK | 13 |
| PRECAUTIONS | 13 |
| REFLOW SOLDERING | 14 |
| REWORKING | 15 |
| CLEANING | 15 |
| RELIABILITY | 16 |
| REVISION HISTORY | 17 |

| | | |
|--|-------------------------|----------------|
| Official Product | Product: HT-122NB5-2932 | Data Sheet No. |
| Tentative Product | ***** | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | Mar. 06, 2006 | Version of 1.0 |
| | | Page 2/17 |

DISCLAIMER

HARVATEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. HARVATEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

HARVATEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of HARVATEK or HARVATEK INTERNATIONAL. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.

2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

| | | | |
|--|-------------------------|----------------|----------------|
| Official Product | Product: HT-122NB5-2932 | | Data Sheet No. |
| Tentative Product | ***** | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | Mar. 06, 2006 | Version of 1.0 | Page 3/17 |

Product Specifications

| | Specification | Material | Quantity |
|----------------|---|-----------------------------------|------------------|
| I _v | M: 18.0-28.5 mcd @5mA / T _a =25° C, ± 10% | | |
| λ _D | B: 465-470 nm C: 470-475 nm @5mA / T _a =25° C, ± 0.5nm | | |
| V _F | 2.75-2.95V (0.1V/bin) @5mA / T _a =25°C, ± 0.05 V | | |
| I _R | ≤1μA @ V _R =5V | | |
| ESD | 2kV (HBM) | | |
| MSL | 2a | | |
| Resin | Clear | Epoxy resin | |
| Carrier tape | Per EIA 481-1A specs | Conductive black tape | 4000pcs per reel |
| Reel | Per EIA 481-1A specs | Conductive black | |
| Label | HT standard | Paper | |
| Packing bag | 220x240mm | Aluminum laminated bag/ no-zipper | One reel per bag |
| Carton | HT standard | Paper | |

Others:

Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same bin combinations of I_v, λ_D and V_f. Each reel has a label identifying its specification; the immediate box consists of a product label as well.

ATTENTION: Electrostatic Discharge (ESD) protection




The symbol to the left denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaN based chips are **STATIC SENSITIVE devices**. ESD precaution must be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

| | | |
|--|-------------------------|----------------|
| Official Product | Product: HT-122NB5-2932 | Data Sheet No. |
| Tentative Product | ***** | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | Mar. 06, 2006 | Version of 1.0 |
| | | Page 4/17 |


Label Specifications

| | | |
|------------------------------|---|----------------------|
| HARVATEK |  | Date: yyyy/mm/dd |
| CUSTOMER P/N: | | |
| HARVATEK P/N: | QTY: PCS | |
| LOT NO: | | QC |
| IV BIN: COLOR BIN: VF: | | |

 Customer P/N: To Be Defined

 Harvatek P/N:

H T - 1 2 2 NB5 - 2 9 3 2



| Series Name | Emitting Color | Customer Code |
|--|-------------------------|-------------------------------|
| HT-122 1.6(L) x 0.8(W) x 0.33(H) mm | NB5 InGaN Blue @ 5mA | 2932 Customer Product Code |

 Lot No.:

1 2 3 4 5 6 7 8 9 10
P 1 2 2 3 0 A - C T

| | | |
|--|-------------------------|----------------|
| Official Product | Product: HT-122NB5-2932 | Data Sheet No. |
| Tentative Product | ***** | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | Mar. 06, 2006 | Version of 1.0 |
| | | Page 5/17 |

| Code 1 | Code 2 | Code 3 | Code 4, 5 | Code 6, 7 | Code 9 | Code 10 |
|--------------------------|---|--|------------|-----------------|-------------------------------|----------------|
| | Mfg. Year | Mfg. Month | Mfg. Date | Lots | Resin Color | Packaging |
| Internal Tracing Code | Z: 2000 1: 2001 2: 2002 3: 2003 | 1: Jan. 2: Feb. 9: Sep. A: Oct. B: Nov. C: Dec. | 1~31/ (30) | 01~99, A,B,C... | C: Water Clear D: Diffused | T: Tape & Reel |

| | | | |
|--|-------------------------|----------------|----------------|
| Official Product | Product: HT-122NB5-2932 | | Data Sheet No. |
| Tentative Product | ***** | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | Mar. 06, 2006 | Version of 1.0 | Page 6/17 |

Luminous Intensity (Iv) Bin:

| Color | Bin Code | Spec. Range |
|------------------------|----------|--------------|
| Blue | M | 18.0-28.5mcd |
| @5mA / Ta=25° C, ± 10% | | |

Forward Voltage (Vf) Bin:

| Color | Bin Code | Spec. Range |
|--------------------------|----------|-------------|
| Blue | G4T | 2.75-285V |
| | H1T | 2.85-2.95V |
| @5mA / Ta=25°C, ± 0.05 V | | |

Wavelength (λ_D) Bin:

| Color | Bin Code | Spec. Range |
|--------------------------|----------|-------------|
| Blue | B | 465-470nm |
| | C | 470-475nm |
| @5mA / Ta=25°C, ± 0.5 nm | | |

| | | | |
|--|-------------------------|---------------|----------------|
| Official Product | Product: HT-122NB5-2932 | | Data Sheet No. |
| Tentative Product | ***** | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | | Mar. 06, 2006 | Version of 1.0 |
| | | | Page 7/17 |

Product Features

Electro-Optical Characteristics

($I_F @ 5\text{mA}$, $T_a = 25^\circ\text{C}$)

| Code for parts | Lighting Color | Material | $V_F(\text{V})$ | | $\lambda(\text{nm})$ | | | $I_V(\text{mcd})$ |
|----------------|----------------|----------|-----------------|------|----------------------|-------------|-----------------|-------------------|
| | | | typ | max | λ_D | λ_P | $\Delta\lambda$ | Typ |
| HT-122NB5 | Blue | InGaN | 2.85 | 2.95 | 472 | 470 | 40 | 25 |

Package Outline Dimension and Recommended Soldering Pattern for Reflow Soldering

Unit: mm Tolerance: +/-0.1

| Outline Dimension | Soldering Pattern |
|--|-------------------|
| | |
| Soldering terminals may shift in the x, y direction. | |

Absolute Maximum Ratings

($T_a = 25^\circ\text{C}$)


| Series | P_d (mW) | I_F (mA) | I_{FP} (mA) | V_R (V) | I_R (uA) | T_{OP} ($^\circ\text{C}$) | T_{ST} ($^\circ\text{C}$) |
|-----------|------------|------------|---------------|-----------|----------------------------|-------------------------------|-------------------------------|
| HT-122NB5 | 78 | 25 | 100** | 5 | $\leq 1 @ V_R = 5\text{V}$ | -40~+85 | -40~+90 |

** Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width


| | | | | |
|--|----------------|-------------------|----------------|----------------|
| Official Product | HT-122NB5-2932 | Customer Part No. | | Data Sheet No. |
| Preliminary Product | | ***** | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | | Mar. 06, 2006 | Version of 1.0 | Page 8/17 |

Characteristics Curves


Forward Current vs. Ambient Temperature

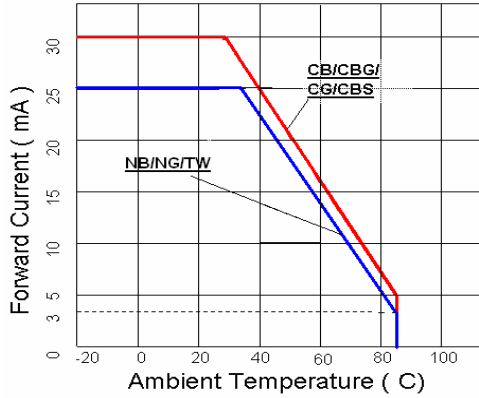


Forward Voltage vs. Forward Current

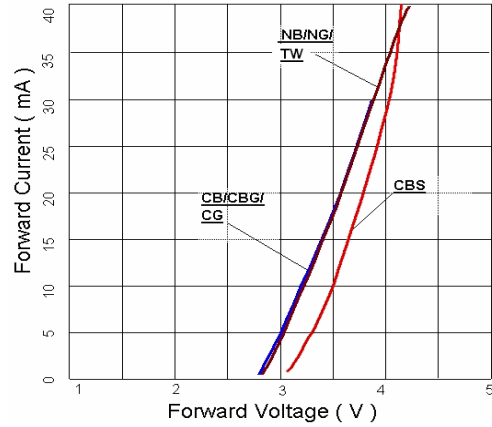


Relative Intensity vs. Forward Current

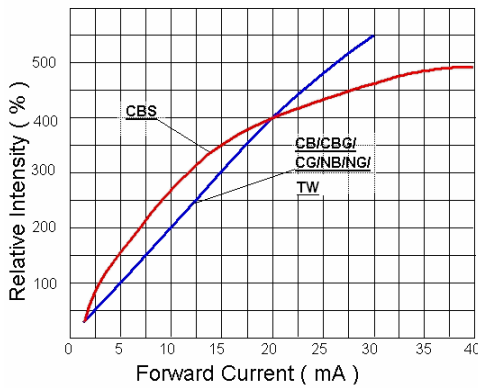


Peak Forward Voltage vs. Forward Current

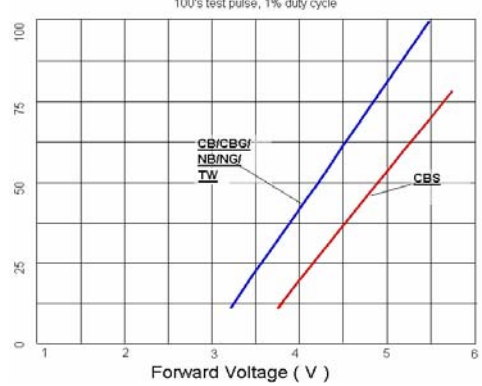

Relative Intensity vs. Ambient Temperature

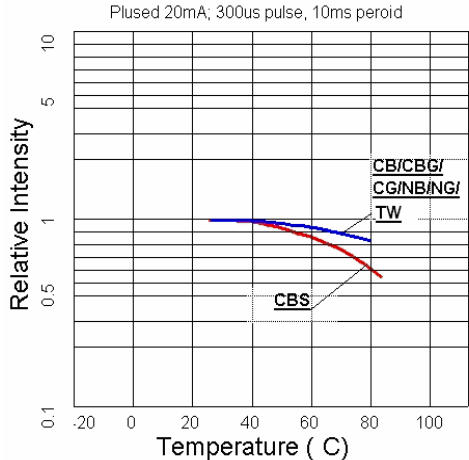


Relative Intensity vs. Wavelength

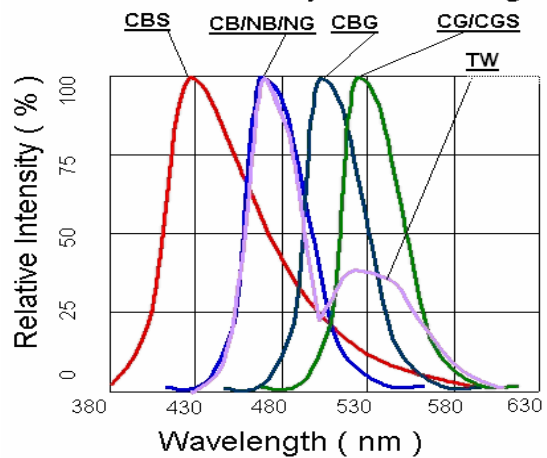


| | | | |
|--|----------------|-------------------|----------------|
| Official Product | HT-122NB5-2932 | Customer Part No. | Data Sheet No. |
| Preliminary Product | | ***** | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | | Mar. 06, 2006 | Version of 1.0 |
| | | | Page 9/17 |

Directive Characteristics

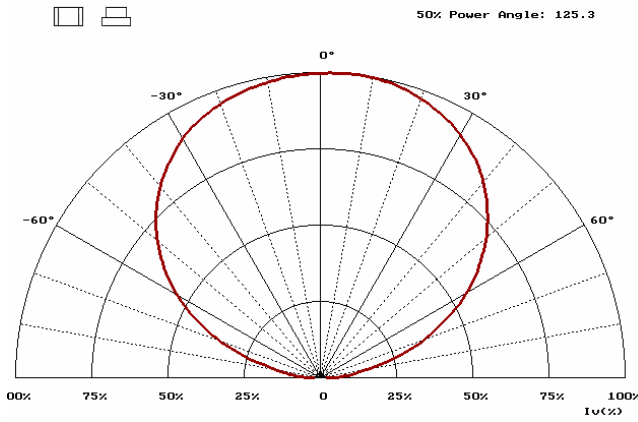


Directive Characteristics

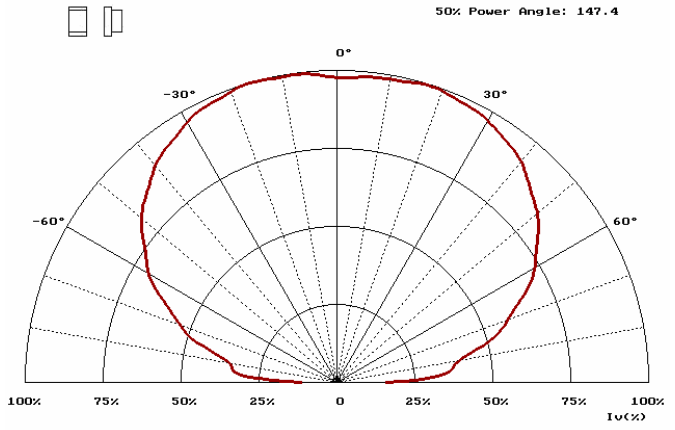

| | | | | |
|--|----------------|-------------------|----------------|----------------|
| Official Product | HT-122NB5-2932 | Customer Part No. | | Data Sheet No. |
| Preliminary Product | | ***** | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | | Mar. 06, 2006 | Version of 1.0 | Page 10/17 |


Packaging

Tape Dimension

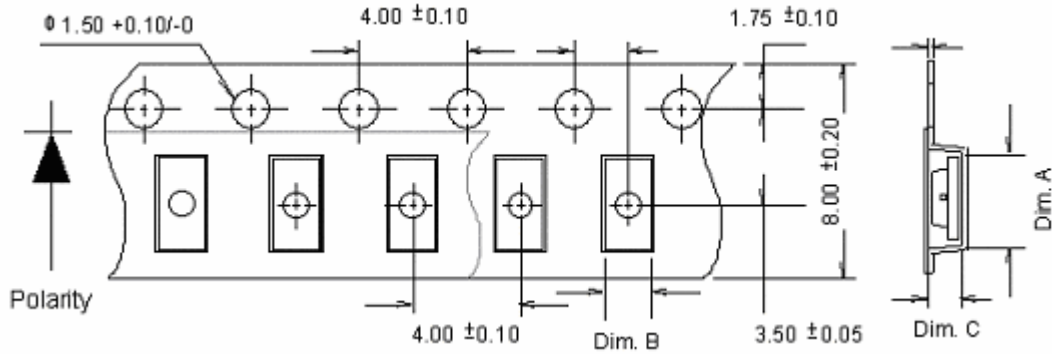

| Part No. | Dim. A | Dim. B | Dim. C | Q'ty/Reel |
|----------|----------|----------|----------|-----------|
| HT-122 | 1.75±0.1 | 0.88±0.1 | 0.50±0.1 | 4K |

Unit: mm

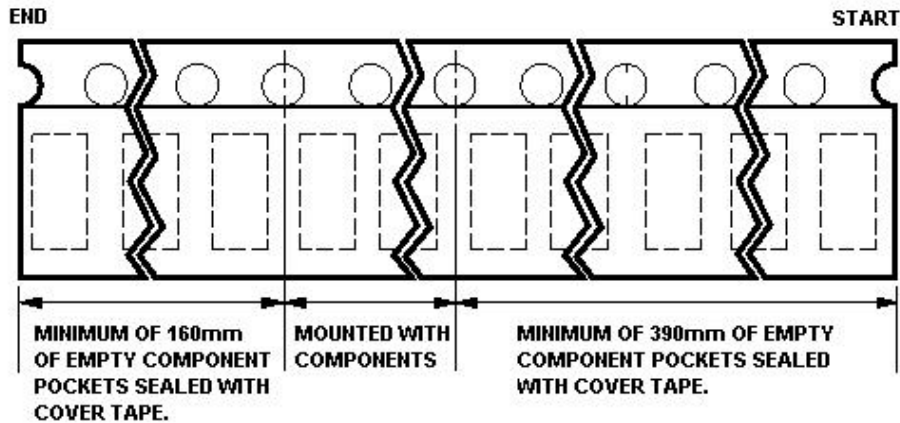


| | | | | |
|--|----------------|-------------------|----------------|----------------|
| Official Product | HT-122NB5-2932 | Customer Part No. | | Data Sheet No. |
| Preliminary Product | | ***** | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | | Mar. 06, 2006 | Version of 1.0 | Page 11/17 |

Dry Pack

All SMD optical devices are **MOISTURE SENSITIVE**. Avoid exposure to moisture at all times during transportation or storage. Every reel is packaged in a moisture protected anti-static bag. Each bag is properly sealed prior to shipment.

Upon request, a humidity indicator will be included in the moisture protected anti-static bag prior to shipment.

The packaging sequence is as follows:

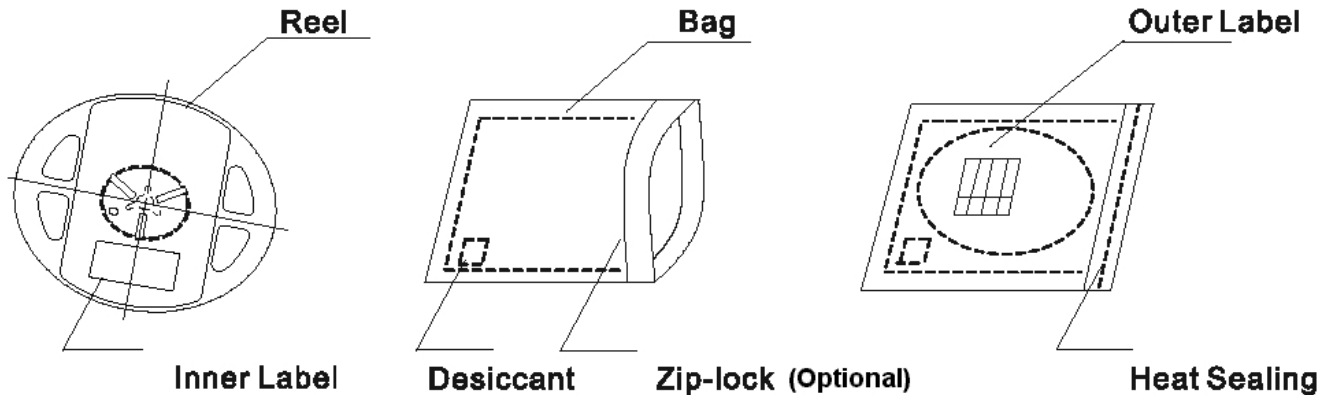

PRECAUTIONS


1. Avoid exposure to moisture at all times during transportation or storage.
2. Anti-Static precaution must be taken when handling GaN, InGaN, and AlInGaP products.
3. It is suggested to connect the unit with a current limiting resistor of the proper size. Avoid applying a reverse voltage beyond the specified limit.
4. Avoid operation beyond the limits as specified by the absolute maximum ratings.
5. Avoid direct contact with the surface through which the LED emits light.
6. If possible, assemble the unit in a clean room or dust-free environment.

| | | | |
|--|----------------|-------------------|----------------|
| Official Product | HT-122NB5-2932 | Customer Part No. | Data Sheet No. |
| Preliminary Product | | ***** | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | Mar. 06, 2006 | Version of 1.0 | Page 13/17 |


Reflow Soldering

- Recommended tin glue specifications: melting temperature in the range of 178~192 °C
- The recommended reflow soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):

Lead Solder Profile

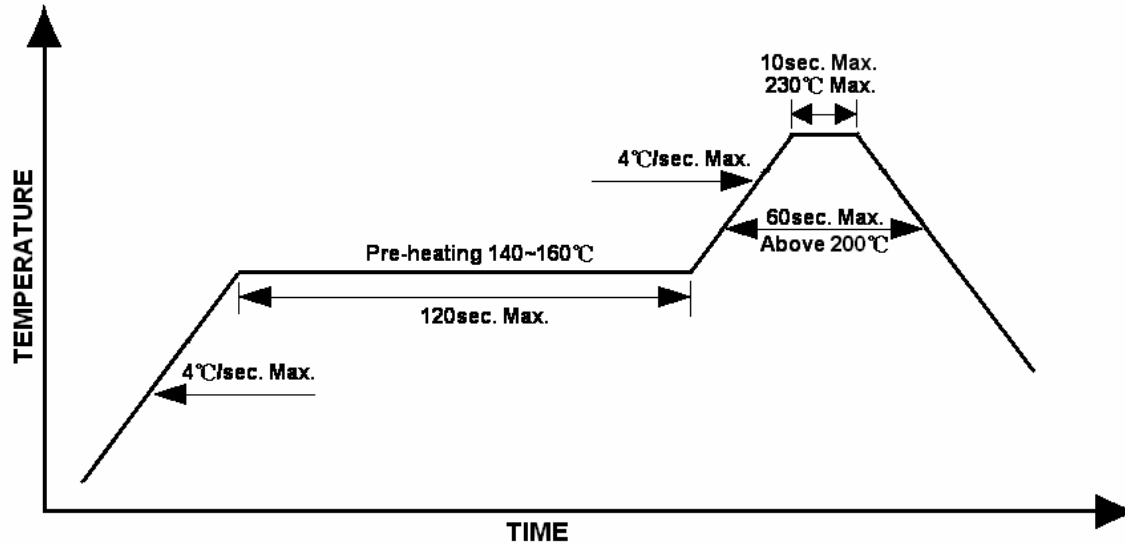

Lead-free Solder Profile

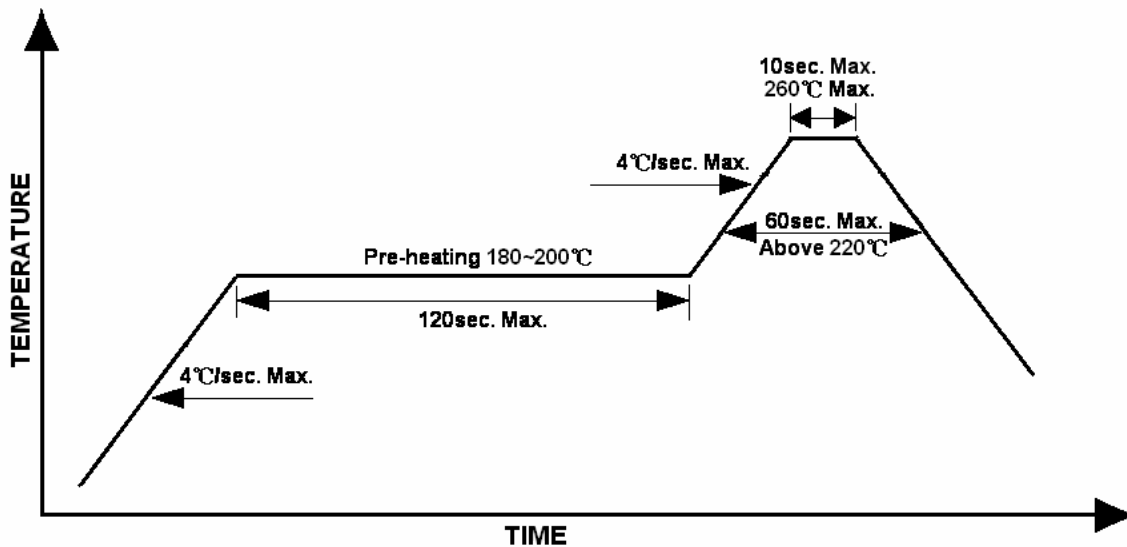

| | | | | |
|--|----------------|-------------------|----------------|----------------|
| Official Product | HT-122NB5-2932 | Customer Part No. | | Data Sheet No. |
| Preliminary Product | | ***** | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | | Mar. 06, 2006 | Version of 1.0 | Page 14/17 |

Reworking

- Rework should be completed within 5 seconds under 260 °C.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.
- Temperature x Time should be 50°C x 30sec. or <30°C x 3min
- Ultra sonic cleaning: < 15W/ bath; bath volume ≤ 1liter
- Curing: 100 °C max, <3min

Cautions of Pick and Place

- Avoid stress on the resin at elevated temperature.
- Avoid rubbing or scraping the resin by any object.
- Electric-static may cause damage to the component. Please ensure that the equipment is properly grounded. Use of an ionizer fan is recommended.

| | | | | |
|--|----------------|-------------------|----------------|----------------|
| Official Product | HT-122NB5-2932 | Customer Part No. | | Data Sheet No. |
| Preliminary Product | | ***** | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | | Mar. 06, 2006 | Version of 1.0 | Page 15/17 |

Reliability

| Item | Frequency/ lots/ samples/ failures | Standards Reference | Conditions |
|--------------------------------------|---|--------------------------------|--|
| Precondition | For all reliability monitoring tests according to JEDEC Level 2 | J-STD-020 | 1.) Baking at 85°C for 24hrs 2.) Moisture storage at 85°C/ 60% R.H. for 168hrs |
| Solderability | 1Q/ 1/ 22/ 0 | JESD22-B102-B And CNS-5068 | Accelerated aging 155°C/ 24hrs Tinning speed: 2.5+0.5cm/s Tinning: A: 215°C/ 3+1s or B: 260°C/ 10+1s |
| Resistance to soldering heat | | CNS-5067 | Dipping soldering terminal only Soldering bath temperature A: 260+/-5°C; 10+/-1s B: 350+/-10°C; 3+/-0.5s |
| Operating life test | 1Q/ 1/ 40/ 0 | CNS-11829 | 1.) Precondition: 85°C baking for 24hrs 85°C/ 60%R.H. for 168hrs 2.) Tamb25°C; IF=20mA; duration 1000hrs |
| High humidity, high temperature bias | 1Q/ 1/ 45/ 0 | JESD-A101-B | Tamb: 85°C Humidity: 85% R.H., IF=5mA Duration: 1000hrs |
| High temperature bias | 1Q/ 1/ 20 | HT specs. | Tamb: 55°C IF=20mA Duration: 1000hrs |
| Pulse life test | 1Q/ 1/ 40/ 0 | | Tamb25°C, If=20mA,, Ip=100mA, Duty cycle=0.125 (tp=125µs,T=1sec) Duration 500hrs) |
| Temperature cycle | 1Q/ 1/ 76/ 0 | JESD-A104-A IEC 68-2-14, Nb | A cycle: -40 degree C 15min; +85 degree C 15min Thermal steady within 5 min.. 300 cycles 2 chamber/ Air-to-air type |
| High humidity storage test | 1Q/ 1/ 40/ 0 | CNS-6117 | 60+3°C 90+5/-10% R.H. for 500hrs |
| High temperature storage test | 1Q/ 1/ 40/ 0 | CNS-554 | 100+10°C for 500hrs |
| Low temperature storage test | 1Q/ 1/ 40/ 0 | CNS-6118 | -40+5°C for 500hrs |

| | | | | |
|--|----------------|-------------------|----------------|----------------|
| Official Product | HT-122NB5-2932 | Customer Part No. | | Data Sheet No. |
| Preliminary Product | | ***** | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | | Mar. 06, 2006 | Version of 1.0 | Page 16/17 |

Revision History

| Changes since last revision | Page | Version No. | Revision Date |
|------------------------------------|------|-------------|---------------|
| Initial Release for stamp-off 2932 | | 1.0 | 03-06-2006 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | | | |
|--|----------------|-------------------|----------------|----------------|
| Official Product | HT-122NB5-2932 | Customer Part No. | | Data Sheet No. |
| Preliminary Product | | ***** | | HT-122NB5-2932 |
| Specifications are subject to change without notice. Data and drawings herein are copyrighted. | | Mar. 06, 2006 | Version of 1.0 | Page 17/17 |