


Infrared LED

L5128, L5871, L6486

Plastic package LED for camera auto-focus

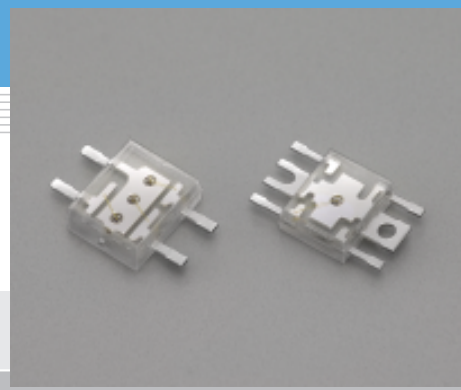

Features

- Low forward voltage: 2.4 V ($I_F=1.0$ A)
- High radiant output power by constant voltage drive
- Small emission spot (reflector size)

Applications

- Auto-focus


■ Absolute maximum ratings ($T_a=25$ °C)

Parameter	Symbol	Condition	Value	Unit
Forward current	I_F		80	mA
Reverse voltage	V_R		3	V
Pulse forward current	I_{FP}	Pulse width=10 μ s Duty ratio=1 %	1.0	A
Operating temperature	T_{opr}		-25 to +80	°C
Storage temperature	T_{stg}		-30 to +100	°C

■ Electrical and optical characteristics ($T_a=25$ °C)


Parameter	Symbol	Condition	L5128, L5871			L6486			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Peak emission wavelength	λ_p	$I_F=50$ mA	880	900	930	880	900	930	nm
Spectral half width	$\Delta\lambda$	$I_F=50$ mA	-	60	-	-	60	-	nm
Forward voltage	V_F	$I_F=50$ mA	-	1.35	1.45	-	1.35	1.45	V
Pulse forward voltage	V_{FP}	$I_F=1.0$ A	-	2.4	2.8	-	2.4	2.8	V
Reverse current	I_R	$V_R=3$ V	-	-	30	-	-	30	μ A
Radiant flux	ϕ_e	$I_F=50$ mA	5.0	7.0	-	5.0	7.0	-	mW
Radiant illuminance	P_E	$I_F=50$ mA	-	0.7	-	-	0.4	-	mW/cm ²
Rise time	t_r	$I_F=50$ mA, 10 to 90 %	-	0.45	0.7	-	0.45	0.7	μ s
Fall time	t_f	$I_F=50$ mA, 90 to 10 %	-	0.45	0.7	-	0.45	0.7	μ s

Emission spectrum

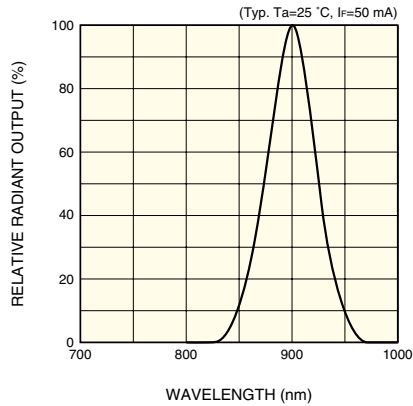


KLEDB0138EB

Radiant flux vs. forward current

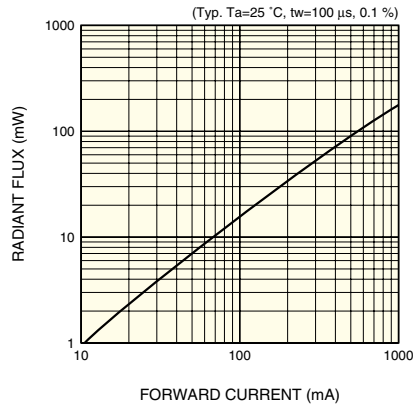


KLEDB0151EA

Forward current vs. forward voltage

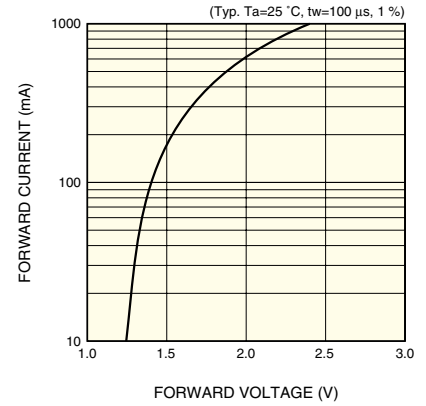


KLEDB0198EA

Directivity

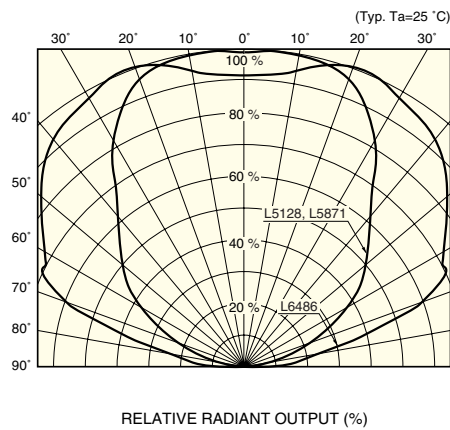


KLEDB0152EA

Radiant output vs. ambient temperature

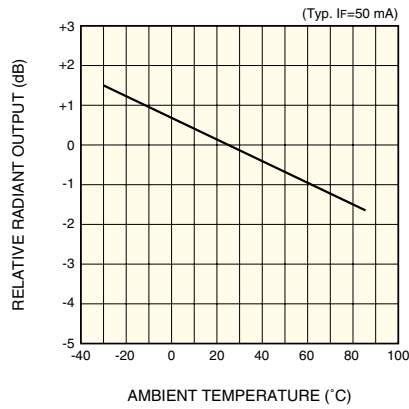

KLEDB0200EA


Allowable forward current vs. ambient temperature

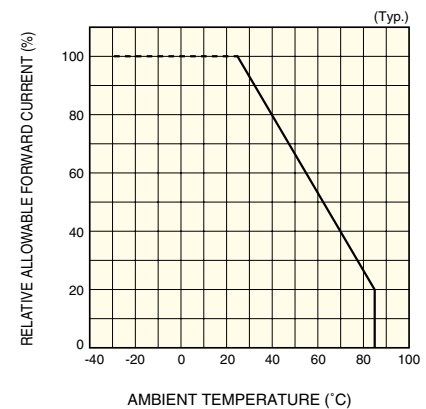

KLEDB0027EB


Dimensional outlines (unit: mm)

① L5128

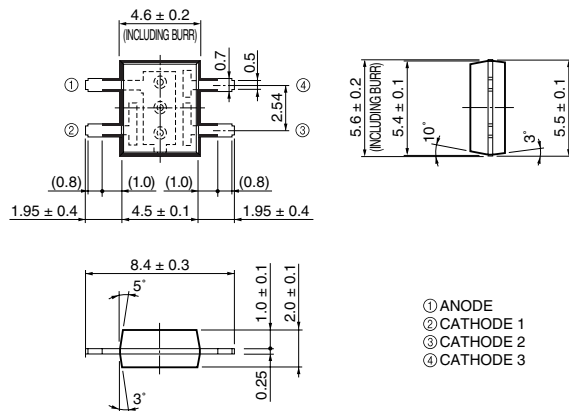

KLEDA0056EA

② L5871, L6486

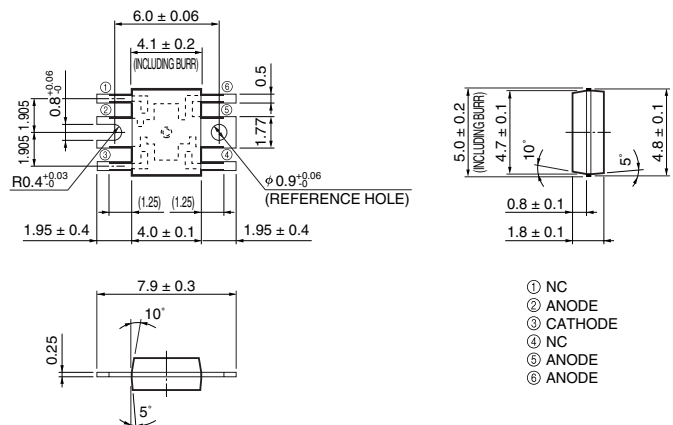

KLEDA0057EA

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation, 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2001 Hamamatsu Photonics K.K.