



■ Features

- On chip Hall sensor
- Rotor-locked shutdown
- Automatically restart
- Frequency generator (FG) output
- Built-in Zener protection for output driver
- Operating voltage: 1.8V~5.75 V
- Output current: $I_{O(AVE)} = 400 \text{ mA}$
- Package: SIP-5L, SOT89-5L

■ General Description

AH292 is a monolithic fan motor controller with Hall sensor's capability. It contains two complementary open-collector transistors for motor's coil driving, automatic lock current shutdown, and recovery protections. Besides, frequency generator (FG) output is for speed detection relatively. To avoid coil burning, rotor-lock shutdown detection circuit shut down the output driver if the rotor is blocked and then the automatic recovery circuit will try to restart the motor. These protecting actions are repeated and periodic during the blocked period. Until the blocking is removed, the motor recovers running normally.


■ Pin Configuration

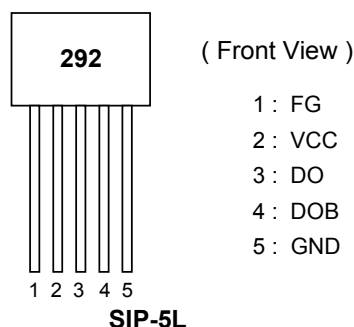


■ Pin Descriptions

Symbol	Description
FG	Frequency generation
VCC	Input power
DO	Output pin
DOB	Output pin
GND	Ground


■ Ordering Information

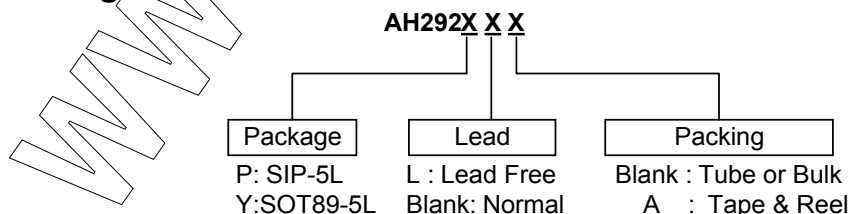

■ Block Diagram (SIP5)

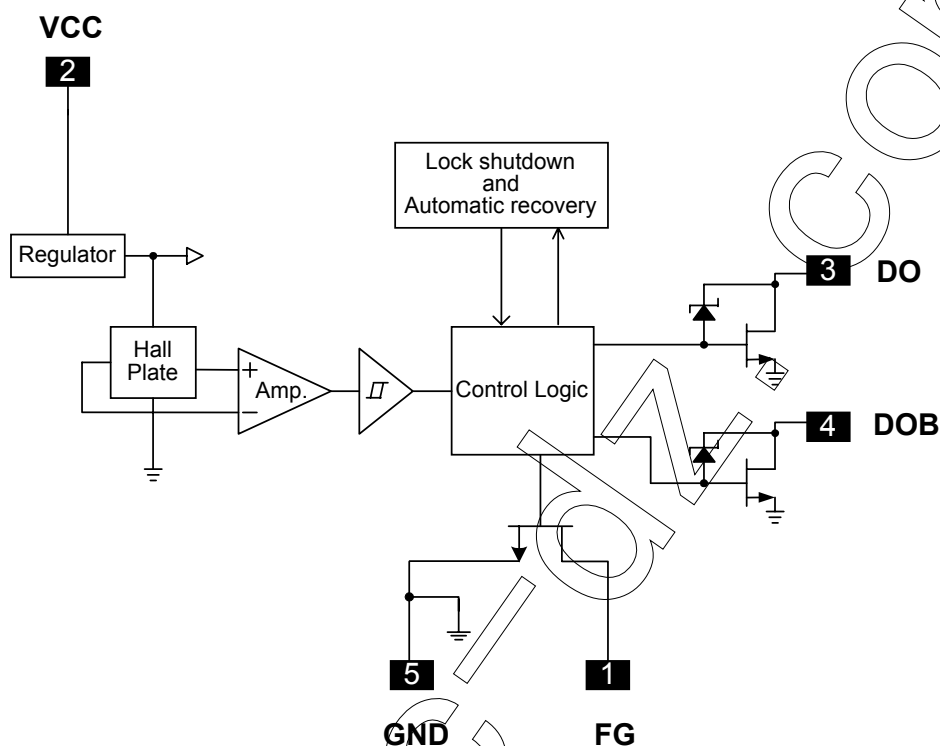

■ Typical Application Circuit

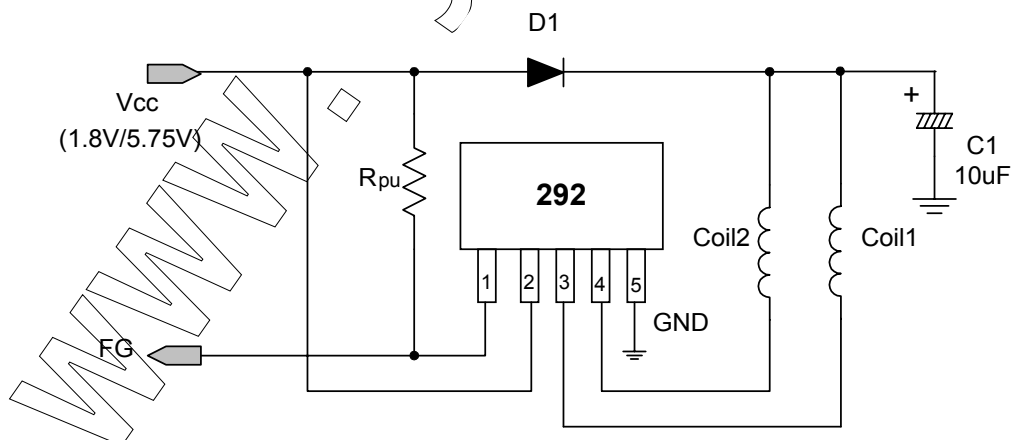

1.8V/5.75V DC Brush-less Fan with FG output function

■ Absolute Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Output Zener-breakdown Voltage	V _Z	38	V
Operating Supply Voltage	V _{CC}	8	V
Output Current	I _{O(AVE)}	400	mA
	I _{O(PEAK)}	500	
Power Dissipation	P _D	SIP5	mW
		SOT89-5	
Operating Temperature	T _{opr}	-20 ~ 100	°C
Storage Temperature	T _{stg}	-55 ~ 150	°C
Maximum Junction Temp.	T _j	150	°C

■ Electrical Characteristics (Ta = 25 °C, V_{CC} = 5V, unless otherwise notice)


Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply Voltage	V _{CC}	Operating	1.8		5.75	V
Supply current	I _{CC}	Operating	-	2.6	4.0	mA
Locked Protection On	Tl _{rp-on}			0.45		Sec
Locked Protection Off	Tl _{rp-off}			2.66		Sec
Output saturation voltage	V _{OUT(sat)}	I _O =180mA	-	300	-	mV
		I _O =350mA	-	600	-	
Output On resistance	R _{DS(on)}			1.75		ohm
FG output Vds	V _{OL}	I _O =10mA		0.5		V

■ Magnetic Characteristics (Ta = 25 °C, V_{CC} = 5V, unless otherwise specified)

(1mT=10 Gauss)


Characteristics	Symbol	Min.	Typ.	Max.	Unit
Operate Point	B _{op}	--	30	60	Gauss
Release Point	B _{rp}	-60	-30	--	Gauss
Hysteresis	B _{hy}	--	60	--	Gauss

■ Operating Characteristics

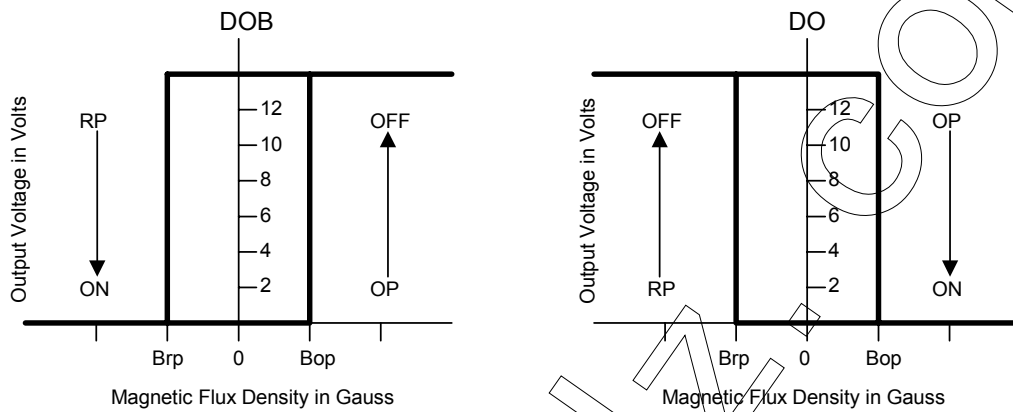


■ Performance Characteristics (SIP5)

Ta (°C)	25	50	60	70	80	85	90	95	100	105	110	115	120
Pd (mW)	550	440	396	352	308	286	264	242	220	198	176	154	132

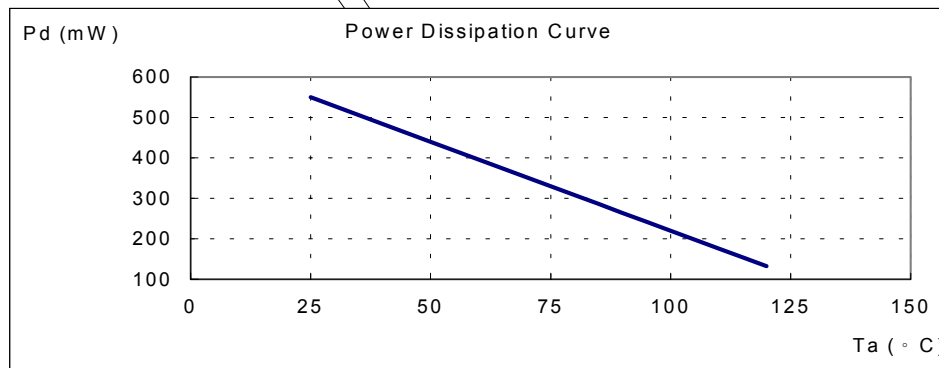


■ Marking Information

(1)SIP-5L

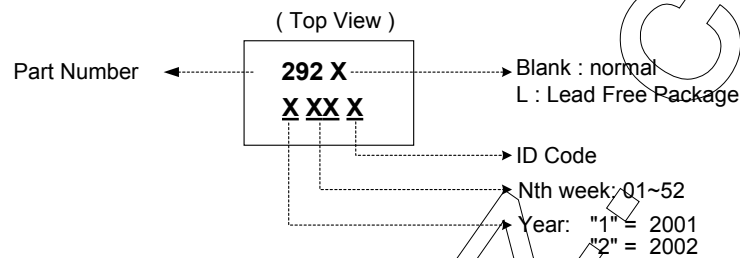


(2)SOT89-5L

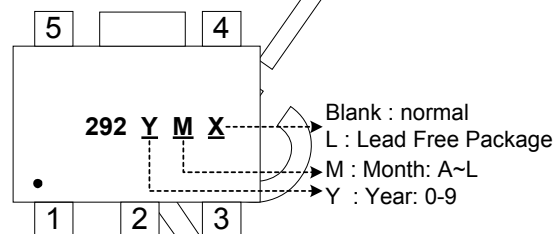


■ Package Information


(1) Package type: SIP-5L (unit: mm / [inch])

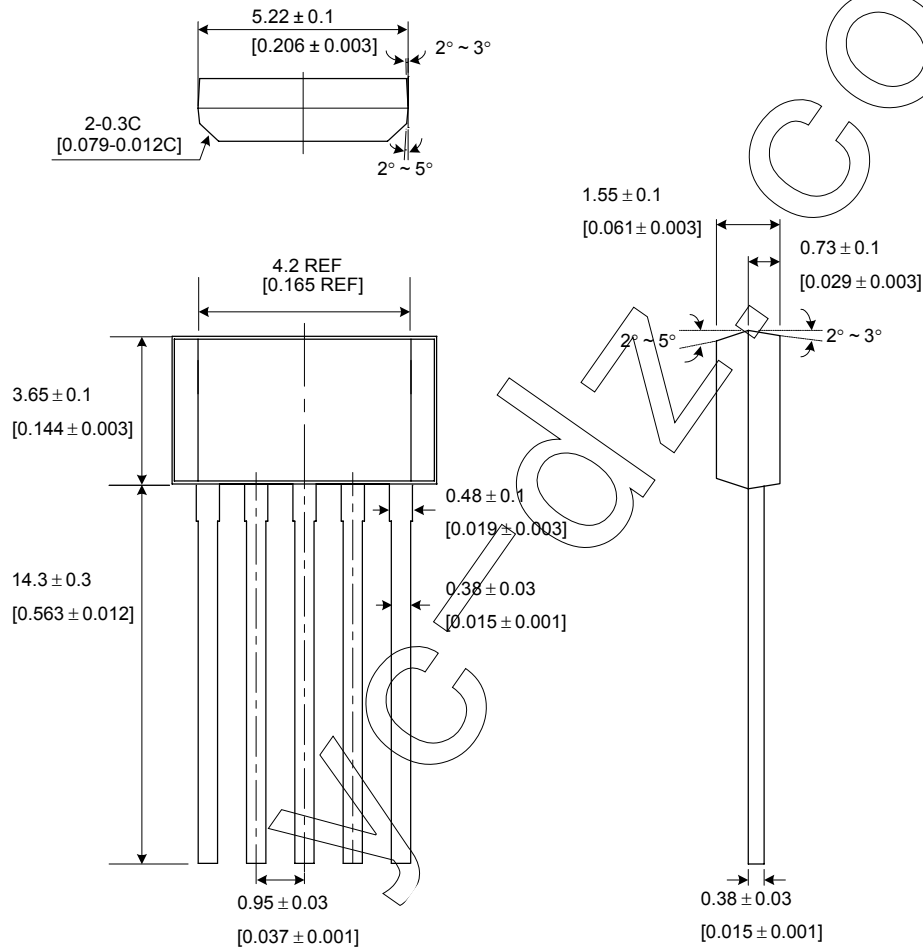


■ Location of Sensing Point

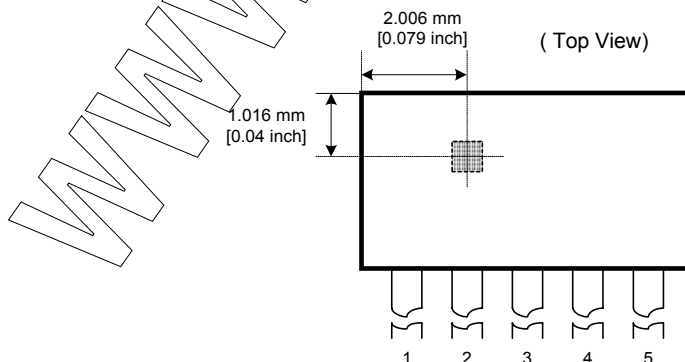

(2) Package type: SOT89-5L

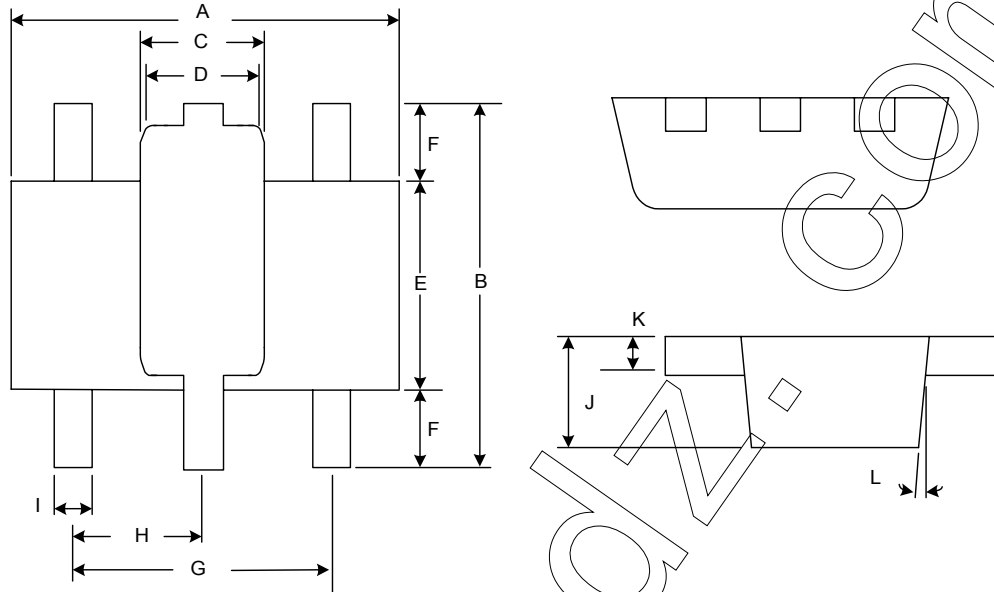

Package Sensor Location

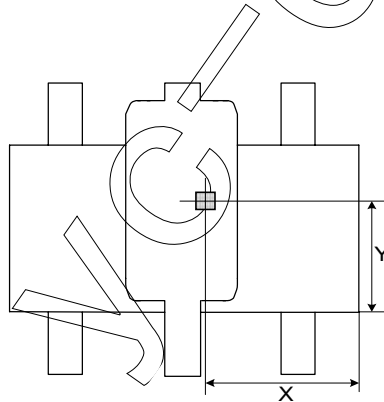

Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	4.40	4.50	4.60	0.173	0.177	0.181
B	4.05	4.15	4.25	0.159	0.163	0.167
C	1.50	1.60	1.70	0.059	0.063	0.067
D	1.30	1.40	1.50	0.051	0.055	0.059
E	2.40	2.50	2.60	0.094	0.098	0.102
F	0.80	-	-	0.031	-	-
G	3.00 Ref.			0.118 Ref.		
H	1.50 Ref.			0.059 Ref.		
I	0.40	0.46	0.52	0.016	0.018	0.020
J	1.40	1.50	1.60	0.055	0.059	0.063
K	0.35	0.39	0.43	0.014	0.015	0.017
L	5° Typ.			5° Typ.		
X	-	1.90	-	-	0.075	-
Y	-	1.65	-	-	0.065	-