

## MIS-2500 series (Preliminary) Integrated Pressure Sensor

### ■ Features

- Factory calibrated and temperature compensated
- ±1.3%FS accuracy ( 20 to 60°C )
- 3V or 5V rail to rail ratiometric analog output
- Gauge pressure or vacuum type
- Pressure range: 1, 5.8, 15, 30 psi & -1000mbar

### ■ Applications

- Industry control
- Medical instrumentation
- Pressure switch
- Hospital bed
- Pump control

The MIS-2500 is a intelligent pressure sensor which consist of a MEMS piezoresistive pressure sensor and a CMOS sensor interface IC. The interface IC enables easy and precise calibration of resistive bridge sensors via EEPROM. It correct digitally offset 、 gain and both temperature coefficients. All devices were factory calibrated and temperature compensated. Using MIS-2500 series is easy to get rid of bothersome calibrations and temperature compensations. The MIS-2500 can provide 3V or 5V rail-to-rail ratiometric analog output.

### ■ Specifications

Parameter	Min	Typ	Max	Units	Notes
<b>Absolute Maximum Ratings</b>					
Supply Voltage	-0.3		6.0	V	
Maximum Overpressure			2X	Rated pressure	
Storage Temperature Range	-40		125	°C	
Operating Temperature Range	-40		85	°C	
Operating humidity	0		95	% RH	No condensation
Media Compatibility	Clean, dry air & non-corrosive gases				
<b>Recommended Operating Conditions</b>					
Pressure Range	1 、 5.8 、 15 、 30 Psi & -1000mbar				
Supply Voltage					
MIS-2500 series	4.75	5	5.25	V	
MIS-2503 series	2.7	3	3.3		
Supply Current	0.25		2	mAdc	
Power ON Rise Time			100	ms	
Offset voltage ( 0 to 85°C )					
MIS-2500 series	0.16	0.25	0.34	V	rail to rail output
MIS-2503 series	0.096	0.15	0.204		
Full scale output ( 0 to 85°C )					
MIS-2500 series	4.66	4.75	4.84	V	rail to rail output
MIS-2503 series	2.796	2.85	2.904		
Full scale span ( 0 to 85°C )					
MIS-2500 series	4.32	4.5	4.68	V	rail to rail output
MIS-2503 series	2.592	2.7	2.808		
Accuracy					
20 to 60°C	-1.3		1.3	%FS	
0 to 85°C	-2		2		
Sensitivity					
1psi		4.5		V/Psi	

5.8psi		0.776		V/Psi	
15psi		0.3		V/Psi	
30psi		0.15		V/Psi	
-1000mbar		4.5e-3		V/mbar	
Response time		1		ms	
Warm-up time		20		ms	
Offset stability			±0.25	%FS	
External Capacitance between Vdd and Gnd	100	220	470	nF	
Output load Capacitance		10	15	nF	
Notes :					
1. Unless otherwise specified, measurements were taken with a supply voltage of 5 Vdc at a temperature of 25±3°C and humidity ranging from 25% ~85% .					
Metrodyne Microsystem Corp. reserves the right to make changes to the product specification in this publication.					

## ■ Ordering Information

Part No.	Pressure type	Pressure range	Supply voltage	Note
MIS-2500-001G	Gauge	1 PSI	5V	
MIS-2500-006G	Gauge	5.8 PSI	5V	
MIS-2500-006GR	Gauge	5.8 PSI	5V	Pressure port directed as leads
MIS-2500-015G	Gauge	15 PSI	5V	
MIS-2500-030G	Gauge	30 PSI	5V	
MIS-2500-015V	Vacuum	-1000mbar	5V	Vacuum
MIS-2503-001G	Gauge	1 PSI	3V	
MIS-2503-006G	Gauge	5.8 PSI	3V	
MIS-2503-015G	Gauge	15 PSI	3V	
MIS-2503-030G	Gauge	30 PSI	3V	
MIS-2503-015V	Vacuum	-1000mbar	3V	Vacuum

## ■ Transfer Function

$$P = \frac{(V_{out} - V_{off})}{Sen.}$$

P : pressure value

V<sub>off</sub> : Offset voltage, the output voltage of sensor without pressure applying

V<sub>out</sub> : The output voltage of sensor when pressure applied

Sen. : Sensitivity of pressure sensor


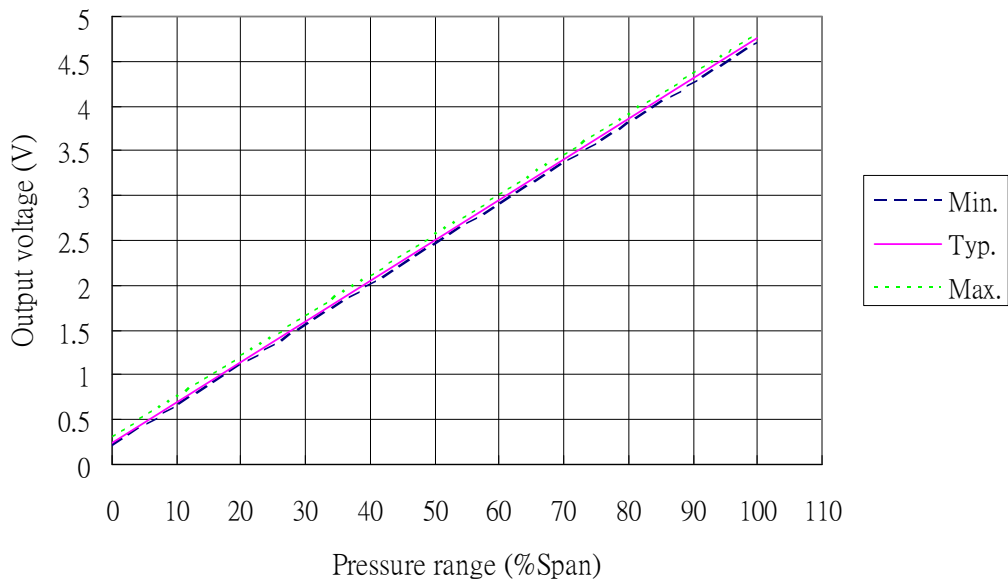



Fig.1 Output voltage vs. Pressure range

## ■ Pin Configuration

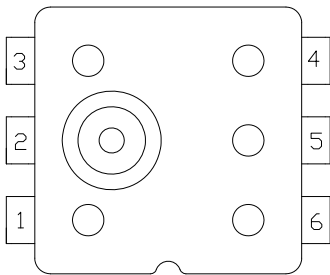


Pin No.	Name	Description
1	NC	No connection
2	NC	No connection
3	NC	No connection
4	VDD	Supply voltage
5	VOUT	Voltage output
6	GND	Ground supply

■ Application Circuit Examples




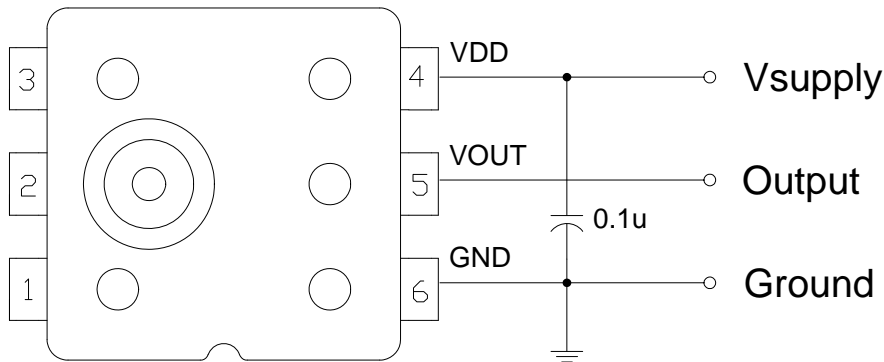


■ Recommended Footprint

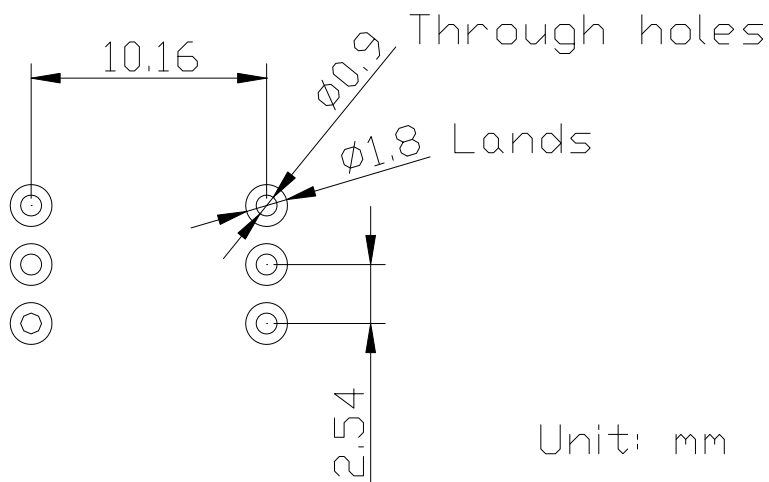


## ■ Outline Dimensions

### ➤ MIS-2500-006G

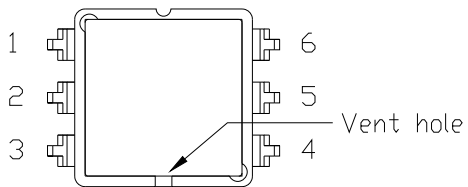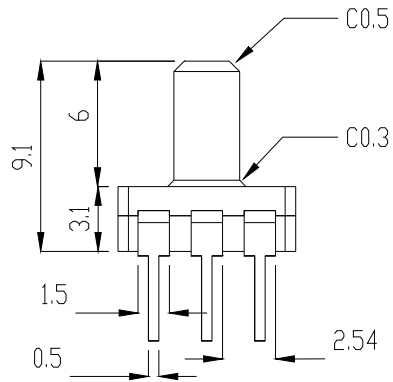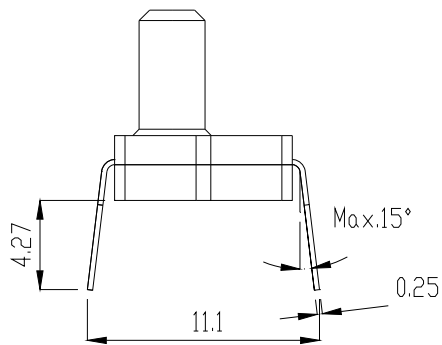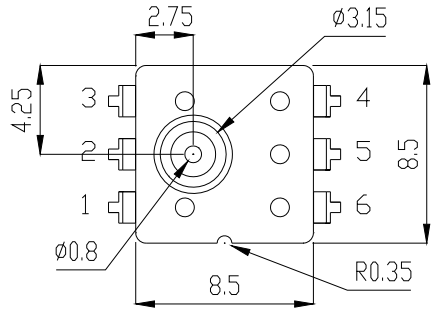

Unit: mm

➤ MIS-2500-006GR

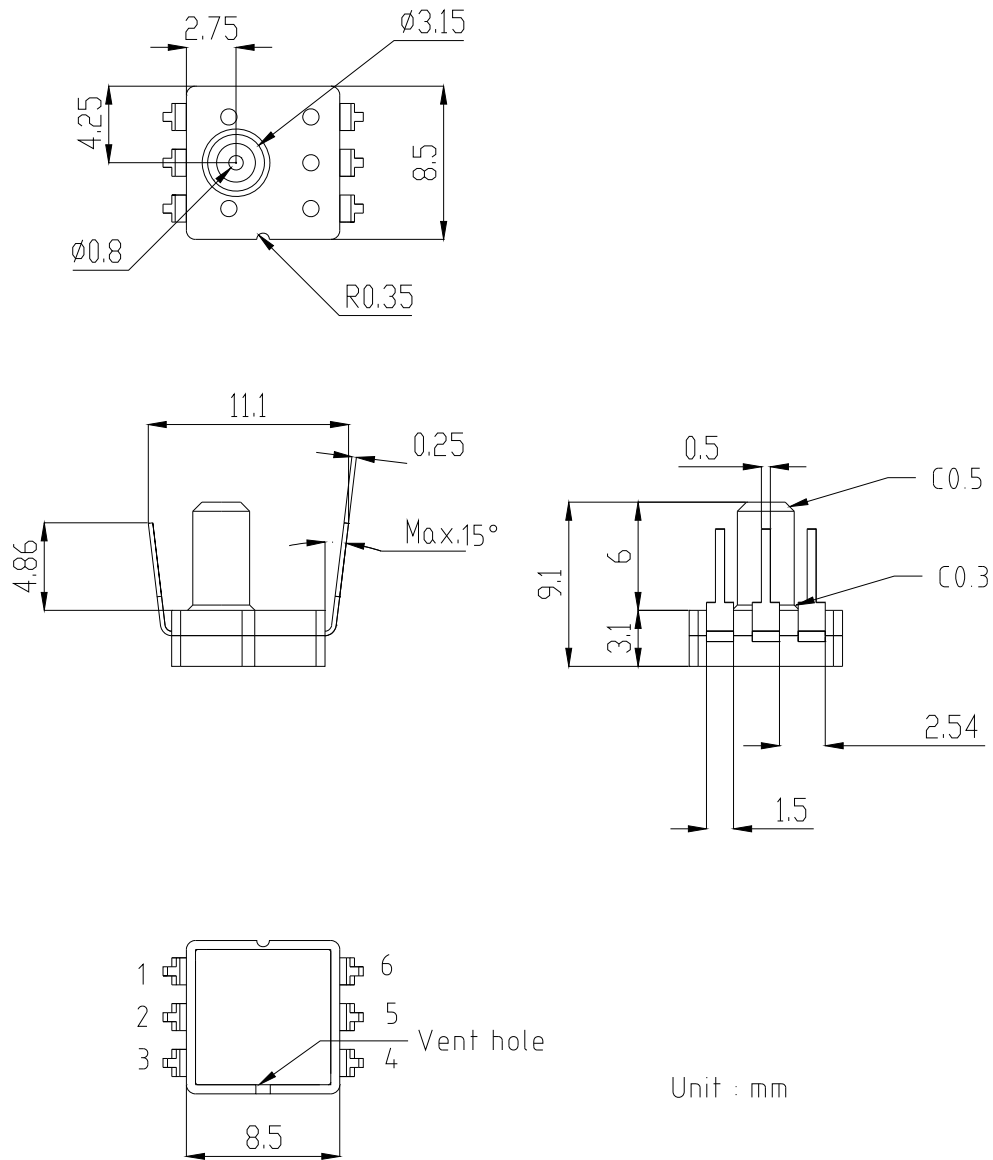

**Metrodyne Microsystem Corp.**

10, Prosperity Rd. II, Science-Based Industrial Park, Hsin-Chu 300, Taiwan, R.O.C.

Tel:886-3-5632161 Fax:886-3-5632509

E-mail:sales@metrodyne.com.tw <http://www.metrodyne.com.tw>