



型 名	社 名	電 気 ・ 光 学 的 特 性 (T _o =25℃)														最大定格 (T _o =25℃)			外 形	備 考	
		光 電 流				暗 電 流		コレクタ・エミッタ間飽和電圧				上 昇 時 間				コレクタ・エミッタ間電圧 V _{CE} (V)	コレクタ損失 P _C (mW)	動作温度 T _{opr} (℃)			
		I _L min (mA)	E mW/cm ²	E _v (lx)	V _{CE} (V)	I _D max (μA)	V _{CE} (V)	V _{CE(sat)} max (V)	E mW/cm ²	E _v (lx)	I _C (mA)	ピーク感度 λ _P typ (nm)	t _r typ (μs)	I _C (mA)	R _L (Ω)						V _{CE} (V)
TPS603A	東 芝	0.006	0.1	—	3	0.1	10	0.4	0.1	—	0.001	720	9	1	1k	9	20	75	-20~75	PT-55	3φ, 広指向性
TPS604		0.06	0.1	—	3	0.2	30	0.4	0.1	—	0.03	800	2	10	100	4	40	150	-40~125	PT-56	TO-18, ベース端子付
TPS605		0.2	0.01	—	3	0.25	16	1.2	0.01	—	0.08	720	200	10	100	4	30	75	-25~85	PT-57	ダブルエンド型
TPS605(LB)		0.2	0.01	—	3	0.25	16	1.2	0.01	—	0.08	720	200	10	100	4	30	75	-25~85	PT-99	DIP
TPS606		0.01	0.1	—	3	0.1	10	0.4	0.1	—	0.001	720	2	1	100	9.5	20	50	-25~75	PT-58	ダブルエンド型
TPS606(LB)		0.01	0.1	—	3	0.1	10	0.4	0.1	—	0.001	720	2	1	100	9.5	20	50	-25~75	PT-99	DIP
TPS607A		0.6	0.1	—	3	0.25	16	1.2	0.1	—	0.3	720	200	10	100	4	30	75	-25~85	PT-59	サイドビュー
TPS608A		0.03	0.1	—	3	0.1	24	0.4	0.1	—	0.015	820	6	2	100	4.8	30	75	-25~85	PT-59	サイドビュー
TPS610		0.1	0.1	—	3	0.1	24	0.4	0.1	—	0.05	800	6	2	100	4.8	30	150	-20~75	PT-60	5φ
TPS611		0.03	0.1	—	3	0.1	24	0.4	0.1	—	0.015	900	6	2	100	4.8	30	150	-20~75	PT-60	5φ, 可視光カットタイプ
TPS612		0.014	0.1	—	3	0.1	10	0.4	0.1	—	0.007	860	4	1	100	9.9	20	75	-20~75	PT-61	3φ, 可視光カットタイプ
TPS613		0.02	0.1	—	3	0.1	10	0.4	0.1	—	0.01	720	4	1	100	9.9	20	75	-20~75	PT-61	3φ
TPS614		0.6	10	—	3	0.2	30	0.4	10	—	0.3	800	2	10	100	4	40	150	-40~125	PT-62	TO-18, ベース端子付
TPS615		0.02	0.1	—	3	0.1	24	0.4	0.1	—	0.01	800	9	1	1k	9	30	75	-30~85	PT-63	3.1φ
TPS616		0.01	0.1	—	3	0.1	24	0.4	0.1	—	0.005	890	9	1	1k	9	30	75	-30~85	PT-63	3.1φ, 可視光カットタイプ
TPS617		0.4	0.1	—	3	0.25	16	1.2	0.1	—	0.2	860	200	10	100	4	30	75	-25~85	PT-59	サイドビュー 可視光カットタイプ
TPS618	0.02	0.1	—	3	0.1	24	0.4	0.1	—	0.01	860	6	2	100	4.8	30	75	-25~85	PT-59	サイドビュー 可視光カットタイプ	
TPS621	0.04	0.1	—	3	0.1	24	0.4	0.1	—	0.015	820	6	2	100	4.8	30	75	-25~85	PT-105	小型サイドビュー	
TPS622	0.027	0.1	—	3	0.1	24	0.4	0.1	—	0.01	870	6	2	100	4.8	30	75	-25~85	PT-105	小型サイドビュー, 可視光カットタイプ	
TPS625	0.6	0.1	—	3	0.25	16	1.2	0.1	—	0.3	720	80	10	100	4	30	75	-25~85	PT-105	小型サイドビュー	
TPS626	0.4	0.1	—	3	0.25	16	1.2	0.1	—	0.2	870	80	10	100	4	30	75	-25~85	PT-105	小型サイドビュー, 可視光カットタイプ	
PH101	日 電	10	—	100	2	0.5	15	1.5	—	1000	10	870				20	100	-30~80	PT-64	ダブルエンド型	
PH102		0.05	—	100	2	0.2	10	0.3	—	1000	0.5	790	5	2	100	9.8	30	100	-30~80	PT-65	ダブルエンド型
PH103		2	—	100	2	0.4	10	1.5	—	1000	10	870				30	100	-20~80	PT-66	サイドビュー	
PH104		0.02	—	100	2	0.1	10	0.3	—	1000	0.5	790				30	100	-20~80	PT-66	サイドビュー	
PH105		0.5	—	100	10	0.2	10	0.3	—	1000	0.5	800				30	150	-40~100	PT-67	4.8φ	
PH106		0.06	—	100	2	0.1	10	0.3	—	1000	0.05	960	20	2	500	4	30	100	-20~80	PT-68	サイドビュー
PH107		10	—	100	2	0.4	10	1.5	—	1000	10	960	150	2	100	4.8	30	100	-20~80	PT-68	サイドビュー
PH108		0.3	0.5	—	5	0.1	10	0.3	5	—	0.5		max40	—	1k	—	30	100	-20~80	PT-69	小型サイドビュー


PT-1

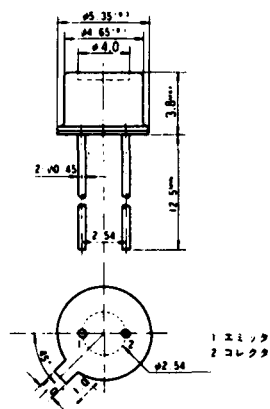


PT-2

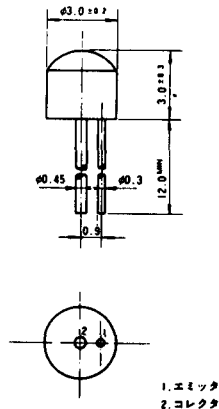


PT-3

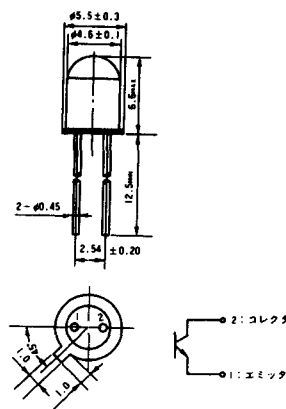


PT-4

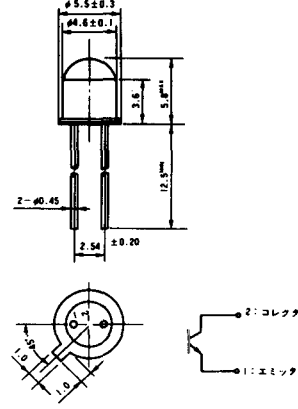


PT-5

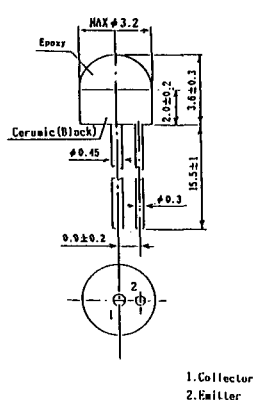


PT-6

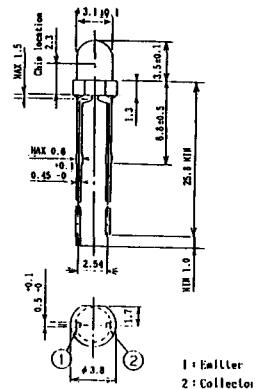


PT-7

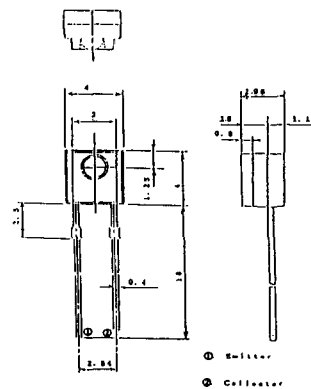


PT-8




PT-9




PT-10




PT-11




PT-12

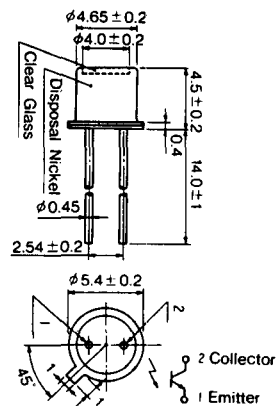


PT-13

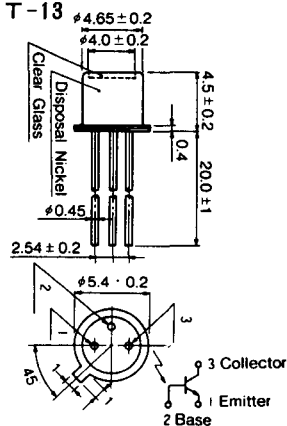


PT-14








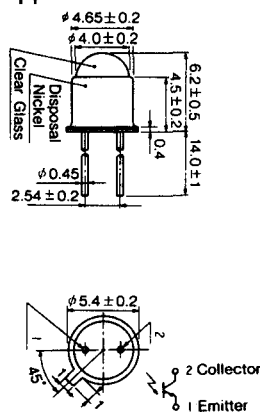


PT-15

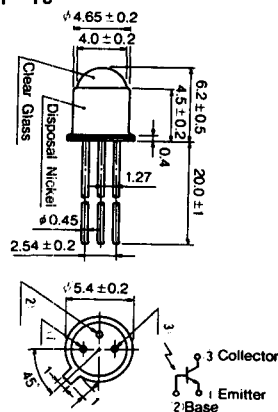


PT-16

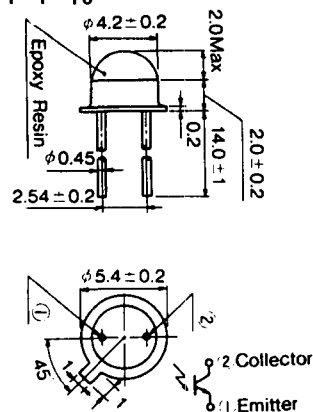

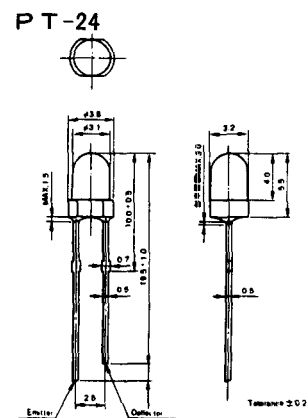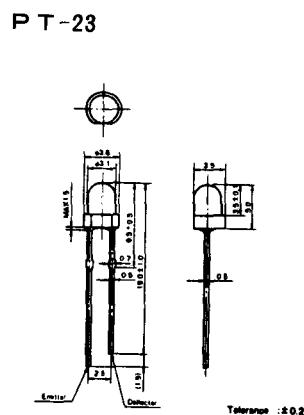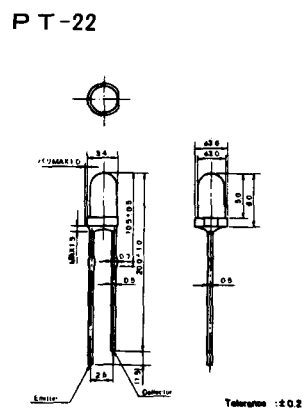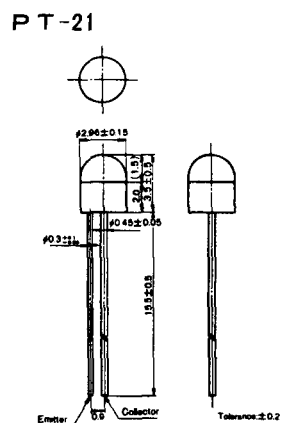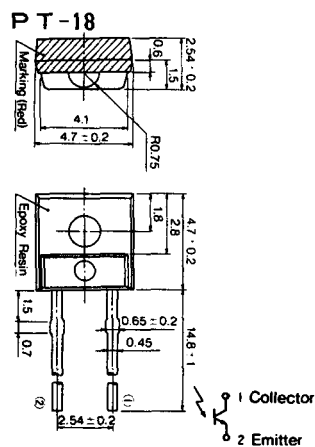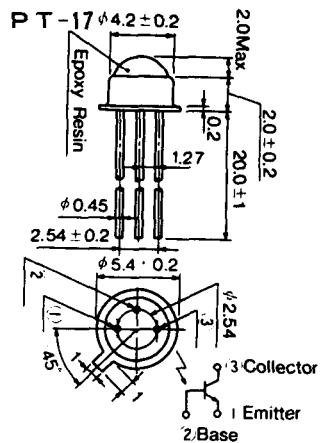


PT-25




①エミッタ②ベース③コレクタ
TO-18システムガラスレンズ付

PT-26




1. エミッタ 2. コレクタ
セラムミックシステム
透明樹脂モールド形

PT-27




①エミッタ②ベース③コレクタ
TO-18システムガラスレンズ付

PT-28




PT-29




1. エミッタ
2. コレクタ
TO-18システムガラスレンズ付

PT-30

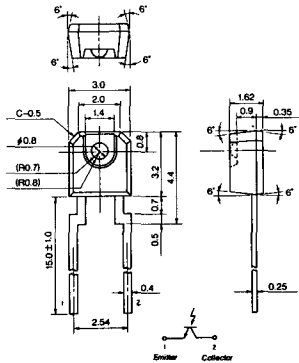


Emitter Collector

PT-31

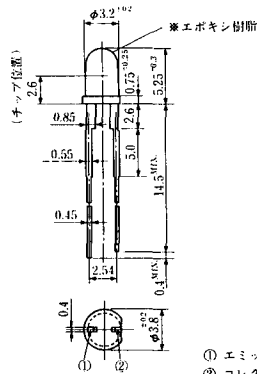

① エミッタ
② コレクタ


PT-32




端子名称
①コレクタ
②エミッタ

図1 指示なき公差は、±0.2MAX.


PT-65

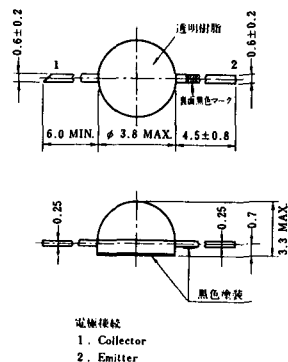


PT-66

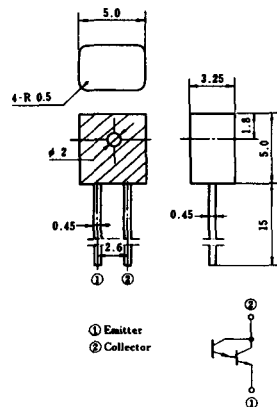


PT-67

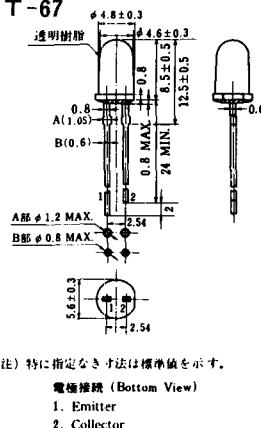


PT-68

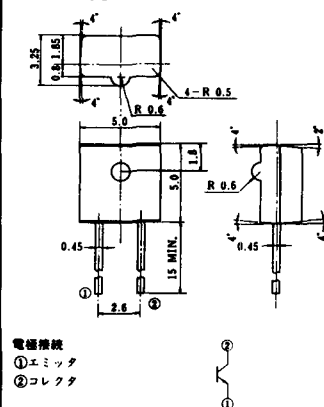


PT-69

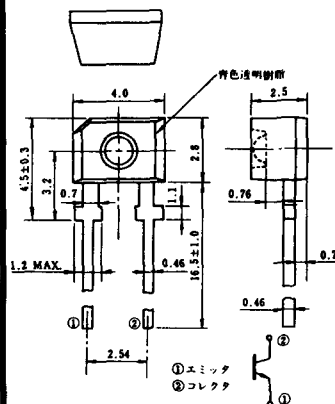


PT-70

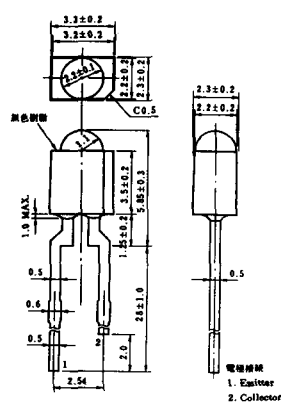


PT-71

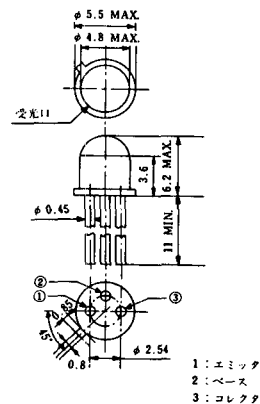


PT-72

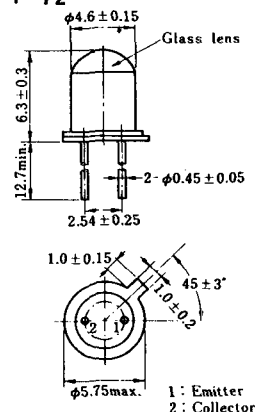


PT-73

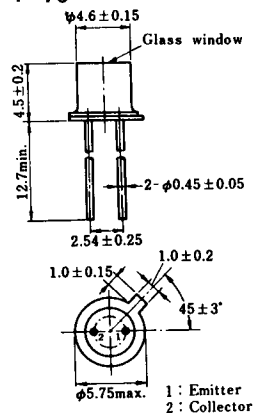


PT-74

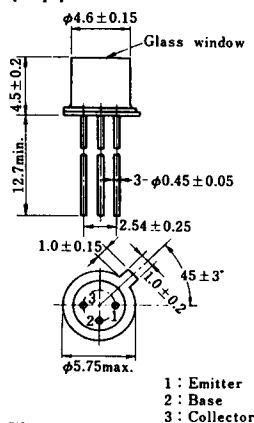


PT-75

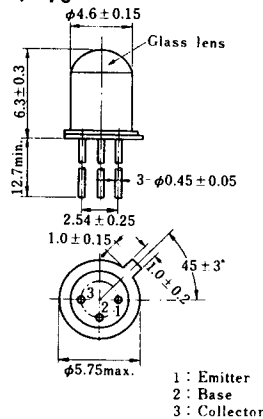


PT-76

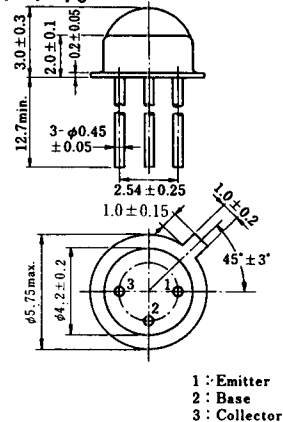


PT-77

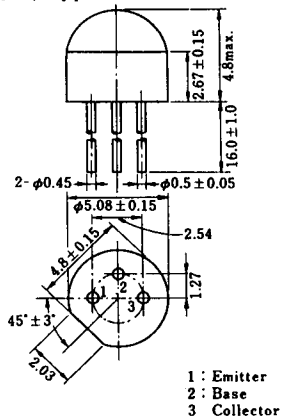


PT-78

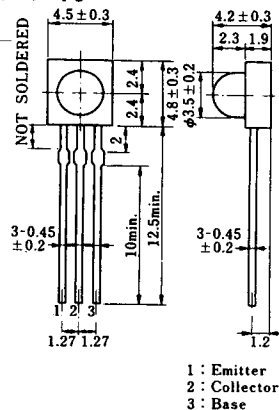


PT-79

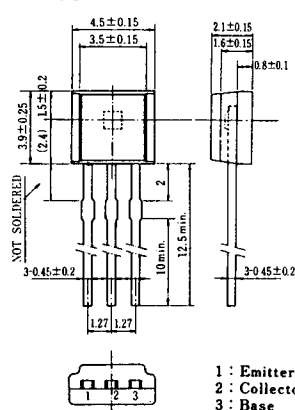


PT-80

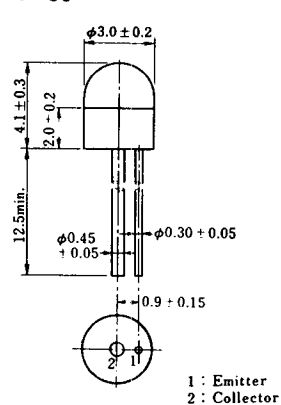


PT-81

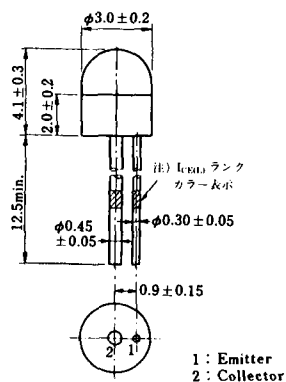


PT-82

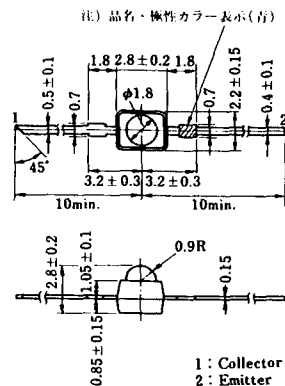


PT-83

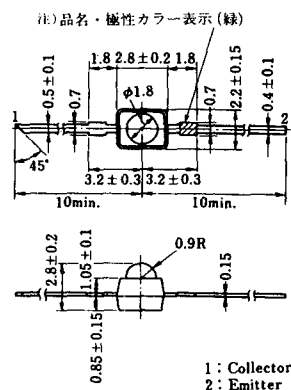


PT-84

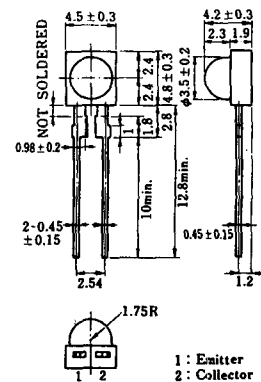


PT-85

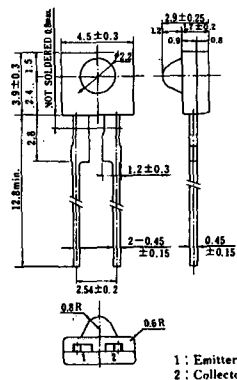


PT-86

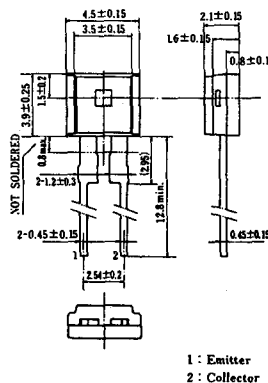


PT-87

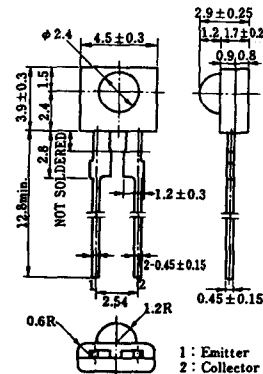


PT-88

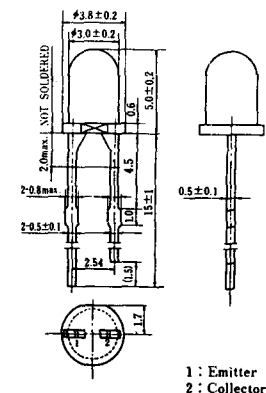


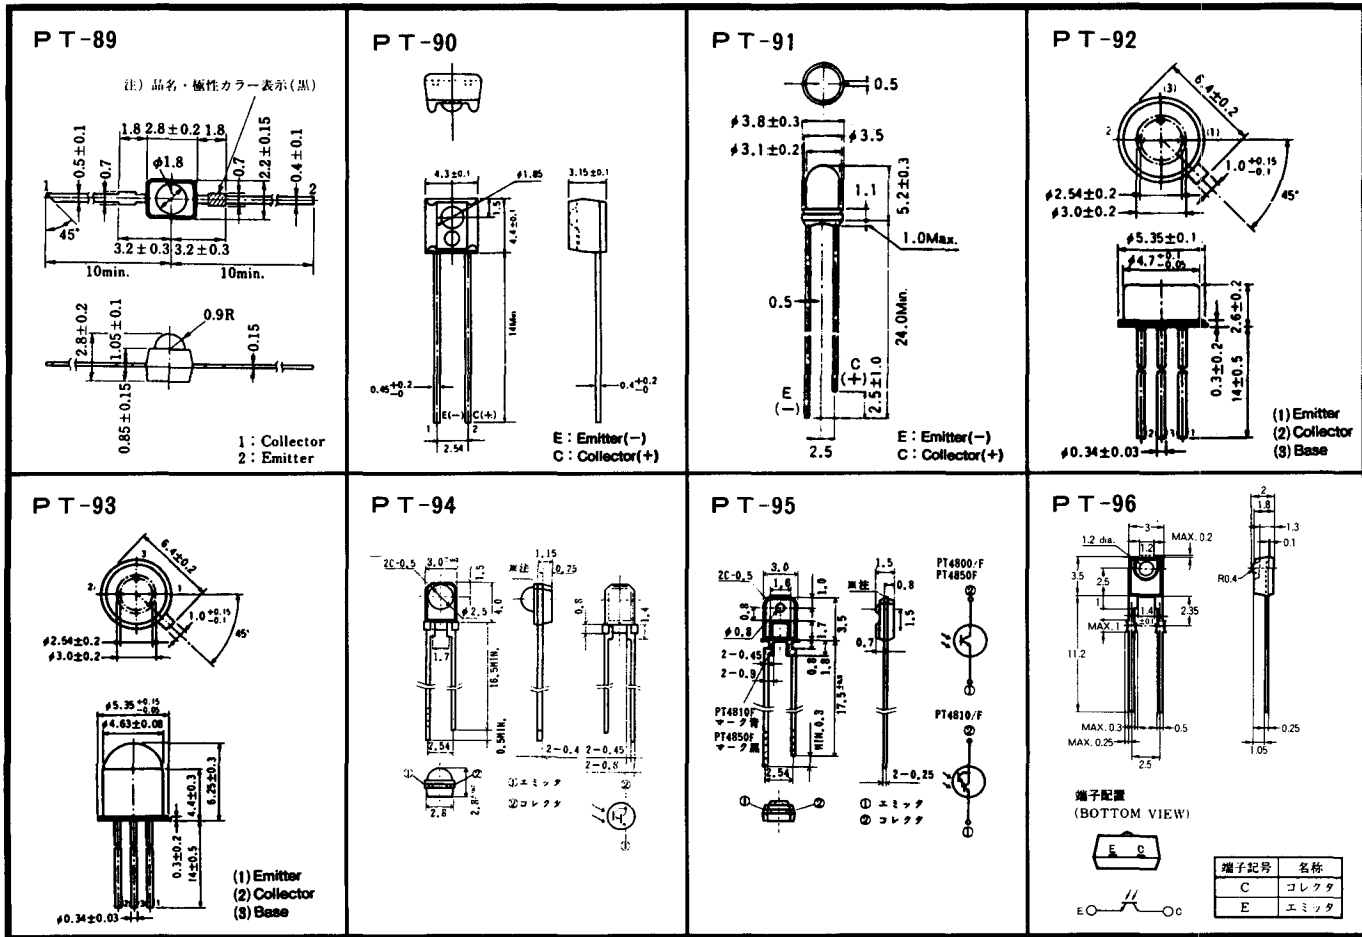


PT-97




PT-98




PT-99




PT-100

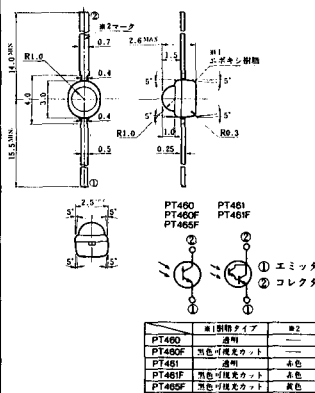


PT-101



PT-102



PT-103



PT-104

