


IS481/IS482

Low Voltage Operating and High Sensitivity Type OPIC Light Detectors




■ Features

1. Built-in Schmidt trigger circuit
2. Low voltage operating type (V_{CC} : 2.3 to 7.0V)
3. High sensitivity type (IS481 E_{VHL} : TYP. 5.4 lx at $T_a=25^{\circ}\text{C}$)
(IS482 E_{VHL} : TYP. 5.4 lx at $T_a=25^{\circ}\text{C}$)
4. LSTTL and TTL compatible
5. Low level output under incident light (IS481)
High level output under incident light (IS482)

■ Applications

1. Battery-driven portable equipment

■ Outline Dimensions

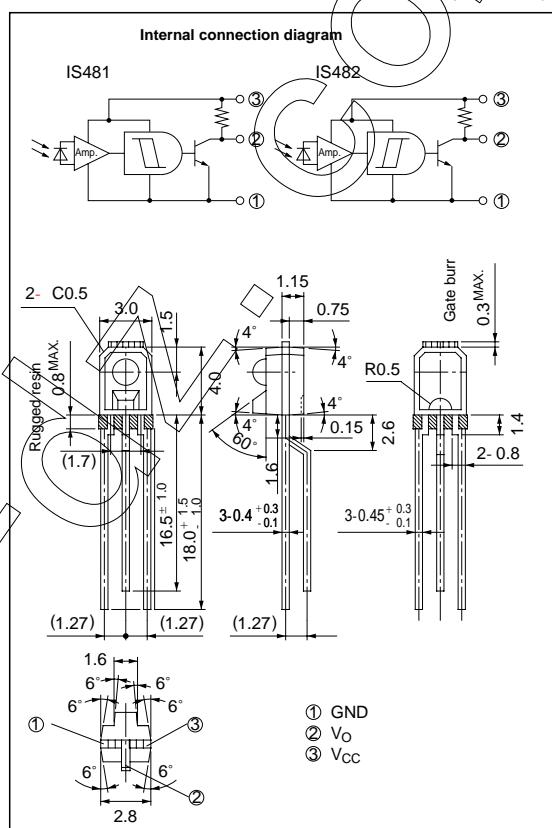

* OPIC (Optical IC) is a trademark of the SHARP Corporation. An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

■ Absolute Maximum Ratings


(Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V_{CC}	-0.5 to +8	V
* ¹ Output current	I_O	8	mA
* ² Total power dissipation	P	80	mW
Operating temperature	T_{opr}	-25 to +85	°C
Storage temperature	T_{stg}	-40 to +100	°C
* ³ Soldering temperature	T_{sol}	260	°C

*1 Output current vs. ambient temperature : Per Fig. 1

*2 Total power dissipation vs. ambient temperature : Per Fig. 2

*3 For 5 seconds at the position of 1.4 mm from bottom face of resin package



■ Electro-optical Characteristics

(Ta=0 to 70°C, V_{CC}=5V unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Low level output voltage	V _{OL}	I _{OL} = 4mA,*4	-	0.15	0.4	V	
High level output voltage	V _{OH}	*5	4.9	-	-	V	
Low level supply current	I _{CCL}	*4	-	1.3	3.8	mA	
High level supply current	I _{CCH}	*5	-	1.0	3.0	mA	
^{*6} "High → Low" threshold illuminance	IS481	Ta=25°C	-	5.4	15		
				22			
	IS482	Ta=25°C	0.6	4.3	-	lx	
			0.4	-	-		
^{*7} "Low → High" threshold illuminance	IS481	Ta=25°C	0.6	4.3	-		
			0.4	-	-	lx	
	IS482	Ta=25°C	-	5.4	15		
			-	-	22		
^{*8} Hysteresis	IS481	E _{VHL} /E _{VHL}	Ta=25°C	0.55	0.80	0.95	-
	IS482	E _{VHL} /E _{VHL}					
Response time	"High → Low" propagation delay time	IS481	t _{PHL}	-	3.0	15	
				-	9.0	30	
	"Low → High" propagation delay time	IS481	t _{PLH}	-	9.0	30	
				-	3.0	15	
	Rise time	t _r		-	0.1	0.5	
	Fall time	t _f		-	0.05	0.5	
Peak sensitivity wavelength	λ _P			-	900	-	nm

^{*4} Defines E_v=50 lx (IS481) and E_v=0 lx (IS482).^{*5} Defines E_v=0 lx (IS481) and E_v=50 lx (IS482).^{*6} E_{VHL} represents illuminance by CIE standard light source A (tungsten lamp) when output changes from "high" to "low".^{*7} E_{VHL} represents illuminance by CIE standard light source A (tungsten lamp) when output changes from "low" to "high".^{*8} Hysteresis standards for E_{VHL}/E_{VHL} (IS481) and E_{VHL}/E_{VHL} (IS482).



■ Recommended Operating Conditions

(Ta=0 to +70°C)

Parameter	Symbol	MIN.	MAX.	Unit
Supply voltage	V _{CC}	2.3	7.0	V
Output current	I _{OL}	-	4.0	mA

In order to stabilize power supply line, connect a by-pass capacitor of 0.01μ F or more between V_{CC} and GND near the device.

■ Test Circuit for Response Time (IS481)

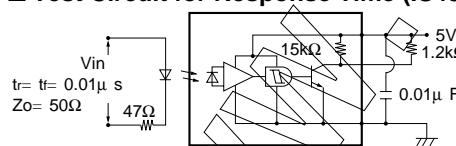

■ Test Circuit for Response Time (IS482)


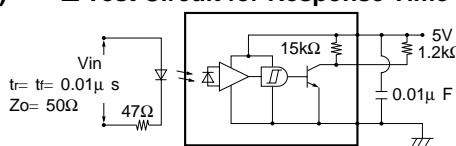


Fig. 1 Output Current vs. Ambient Temperature

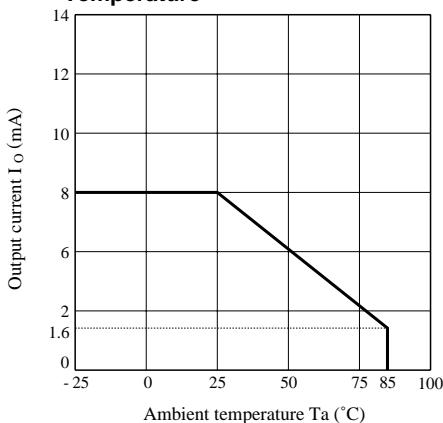


Fig. 3 Low Level Output Voltage vs. Low Level Output Current

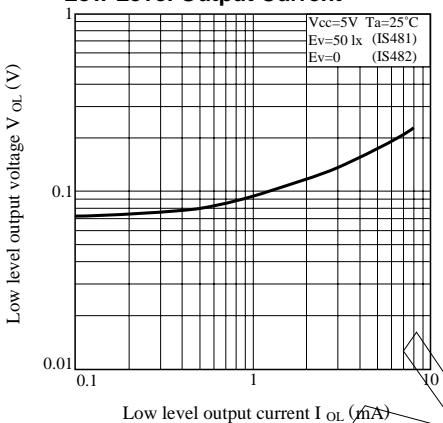


Fig. 5 Supply Current vs. Ambient Temperature

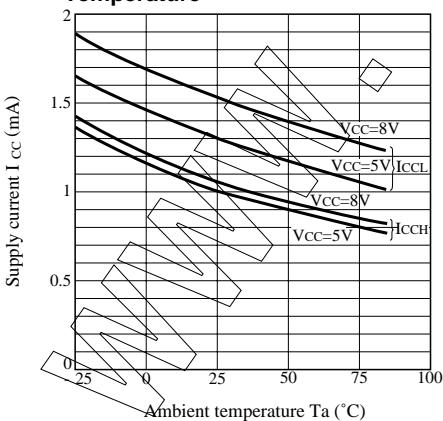


Fig. 2 Output Power Dissipation vs. Ambient Temperature

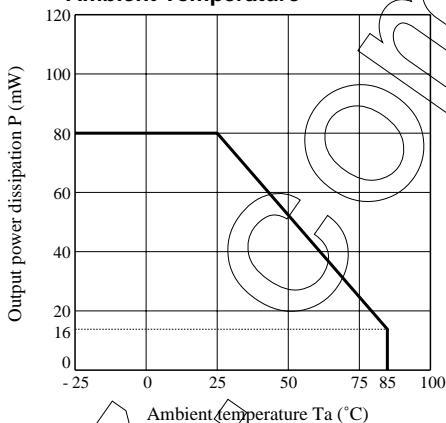


Fig. 4 Low Level Output Voltage vs. Ambient Temperature

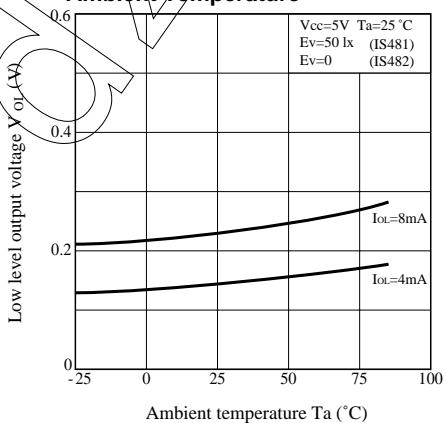


Fig. 6 Rise, Fall Time vs. Load Resistance

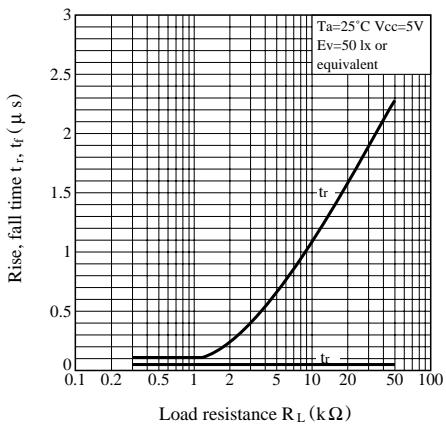
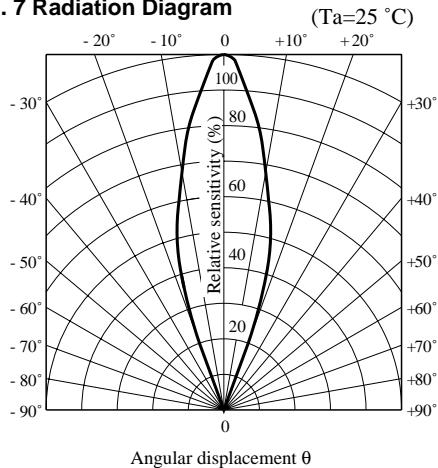
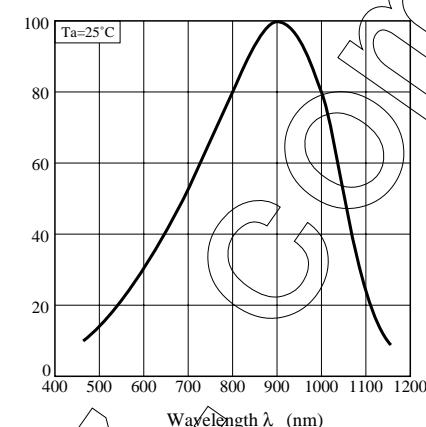


Fig. 7 Radiation Diagram**Fig. 8 Spectral Sensitivity (TYP.)**

- Please refer to the chapter "Precautions for Use". (Page 78 to 93)

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.

