

GP2A20/GP2A22

Light Modulation, Long Focal Distance Type OPIC Photointerrupter

■ Features

1. Light modulation type, free from external disturbing light
2. Long focal distance type
Detecting range
(GP2A20: 3 to 7mm)
(GP2A22: 9 to 15mm)
3. Capable of TTL direct connection
4. With 3-pin connector provided for easier interface with peripheral control circuit

■ Applications


1. Copiers
2. Laser beam printers
3. Facsimiles

■ Line-ups

	Detecting range	
	3 to 7mm	9 to 15mm
Model No.	GP2A20	GP2A22

■ Outline Dimensions

(Unit : mm)

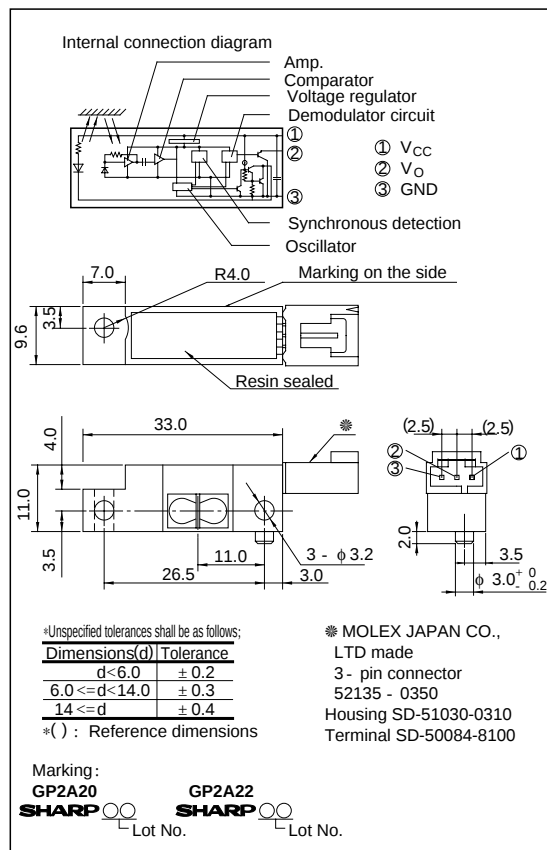

*“ OPIC ” (Optical IC) is a trademark of the SHARP Corporation.

An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

■ Absolute Maximum Ratings (Ta= 25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	- 0.5 to 7	V
*1 Output voltage	V _O	30	V
*2 Low level output current	I _{OL}	50	mA
*3 Operating temperature	T _{opr}	- 10 to + 60	°C
*3 Storage temperature	T _{stg}	- 20 to + 80	°C

*1 Collector-emitter voltage of output transistor

*2 Collector current of output transistor


*3 The connector should be plugged in/out at normal temperature.

■ Electro - optical Characteristics


(V_{CC} = 5V, T_a = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Operating supply voltage		V _{CC}		4.75	-	5.25	V
Dissipation current	Peak pulse value	I _{CCP}	*4 r = 1Ω	-	-	150	mA
	Smoothing value	I _{CC}	R _L = ∞	-	-	30	mA
Low level output voltage		V _{OL}	I _{OL} = 16mA at detecting time	-	-	0.4	V
High level output voltage		V _{OH}	R _L = 1kΩ at non-detecting time	4.5	-	-	V
Non-detecting distance	GP2A20	L _{LHL}	*5 Reflective object: Kodak 90% reflective paper	-	-	20	mm
	GP2A22			-	-	50	
			*5 Reflective object: Chloroprene rubber	-	-	25	
Minimum detecting distance	GP2A20	L _{HLS}	*5 Reflective object: Artwork tape	-	-	3.0	mm
	GP2A20		*5 Reflective object: Kodak 90% reflective paper	-	-	1.0	
	GP2A22		*5 Reflective object: Black paper	-	-	9.0	
	GP2A20		*5 Reflective object: OHP paper, θ = 5deg. (X,Y direction)	-	-	3.0	
	GP2A22			-	-	9.0	
Maximum detecting distance	GP2A20	L _{HLL}	*5 Reflective object: Artwork tape	7.0	-	-	mm
	GP2A20		*5 Reflective object: Kodak 90% reflective paper	9.0	-	-	
	GP2A22			17.0	-	-	
	GP2A22		*5 Reflective object: Black paper	15.0	-	-	
	GP2A20		*5 Reflective object: OHP paper, θ = 5deg. (X,Y direction)	7.0	-	-	
Response time	"High→Low" propagation delay time	t _{PHL}	*6	-	-	1	ms
	"Low→High" propagation delay time	t _{PLH}		-	-	1	ms

*4 Test Condition for Dissipation Current (Peak Pulse Value)

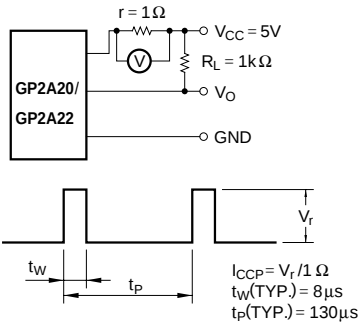

*5 Test Condition for Detecting Distance Characteristics

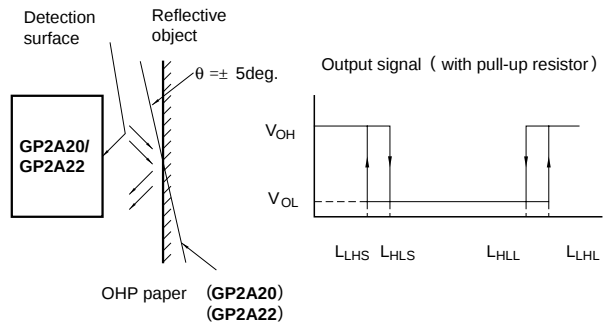

*6 Test Condition for Response Time

Reflective object: Kodak 90 % reflective paper

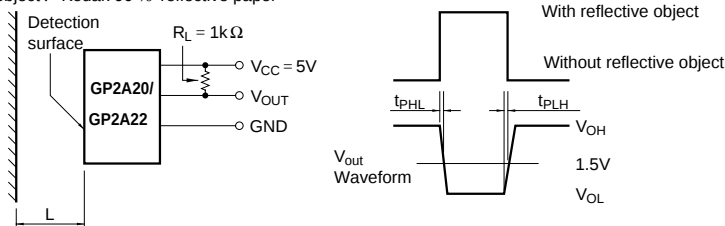


Fig. 1 Low Level Output Current vs. Ambient Temperature

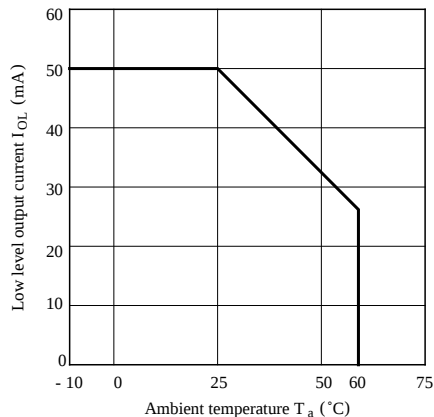


Fig. 2 Low Level Output Voltage vs. Ambient Temperature

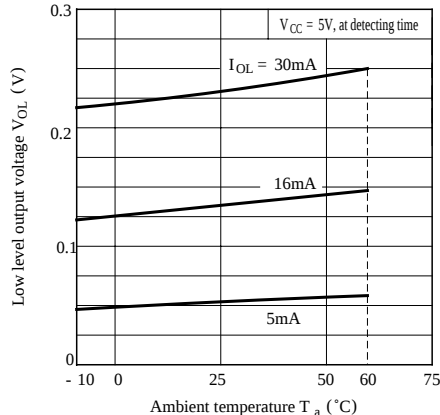


Fig. 3 Low Level Output Voltage vs. Low Level Output Current


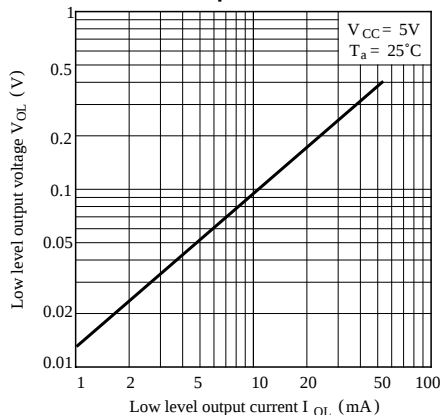


Fig. 4 Dissipation Current (Smoothing Value) vs. Supply Voltage

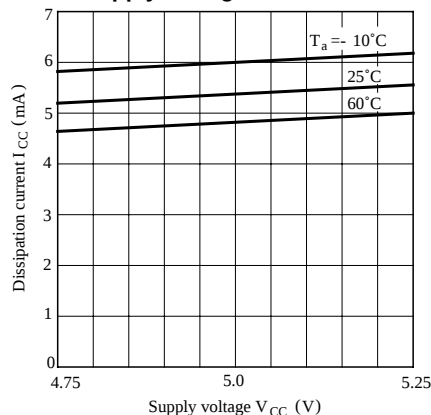

■ Precautions for Use

- (1) In order to stabilize power supply line, connect a by-pass capacitor of more than $0.33\mu\text{F}$ between V_{CC} and GND near the product.
- (2) Please do not perform dip cleaning or ultrasonic cleaning because lens part of this product is an optical device of acrylic resin.
- (3) Remove dust or stains, using an air blower or a soft cloth moistened in cleaning solvent. However, do not perform the above cleaning using a soft cloth with cleaning solvent in the marking portion.
In this case, use only the following type of cleaning solvent used for wiping off:
Ethyl alcohol, Methyl alcohol, Isopropyl alcohol
When the cleaning solvents except for specified materials are used, please consult us.
- (4) As for other general cautions, refer to the chapter "Precautions for Use".

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.