

TOSHIBA INFRARED LED GaAs INFRARED EMITTER

TLN212

INFRARED LIGHT EMISSION DIODE FOR STILL CAMERA


LIGHT SOURCE FOR AUTO FOCUS

Unit in mm

- Optical radiation of current confining LED chip is condensed by a resin lens.
- Large output
- Effective emission size is $388 \times 296 \mu\text{m}$
- Optical output can be radiated efficiently in a solid angle 1.136sr .
- Proper forward voltage for 2 cells ($V_{\text{cc}}=3\text{V}$)

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Forward Current (Note 1)	I_F	50	mA
Pulse Forward Current (Note 2)	I_{FP}	800	mA
Reverse Voltage	V_R	1	V
Operating Temperature Range	T_{opr}	$-25 \sim 60$	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	$-40 \sim 90$	$^\circ\text{C}$

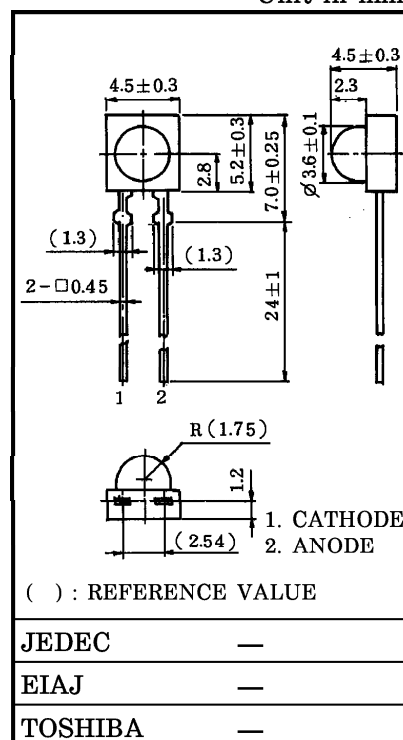

Weight : 0.18g (TYP.)

(Note 1) An allowable value in the acceptance inspection / characteristic test and is not guaranteed for actual application.

(Note 2) Within 4 hours at the drive condition in the following diagram.

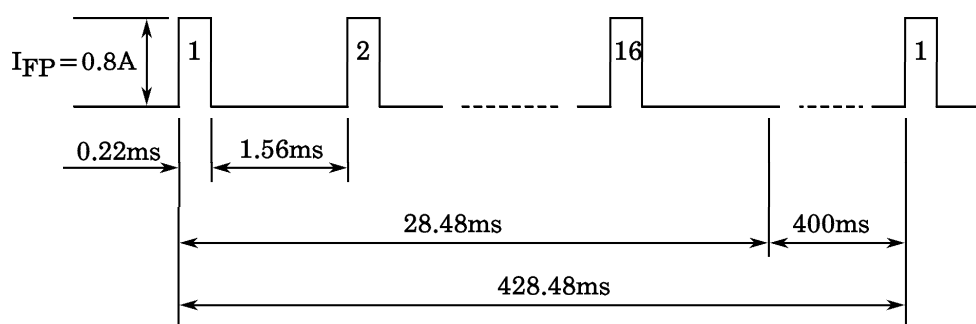


961001EAC2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

OPTO-ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	V_F	$I_F = 50\text{mA}$	—	1.35	—	V
Pulse Forward Voltage	V_{FP}	$I_{FP} = 300\text{mA}$, $t = 10\text{ms}$	—	1.67	1.85	V
Reverse Current	I_R	$V_R = 1\text{V}$	—	—	100	μA
Effective emission spot size	X	Half Value of Peak (Note 1)	—	388	—	μm
	Y	Half Value of Peak (Note 1)	—	296	—	μm
Radiation Flux	ϕ_e	$I_{FP} = 300\text{mA}$, $t = 10\text{ms}$ (Note 2)	8	12	—	mW
Half Value Angle	$\theta_{\frac{1}{2}}$	$I_F = 50\text{mA}$	—	± 35	—	°
Peak Emission Wavelength	λ_P	$I_F = 50\text{mA}$	850	870	900	nm
Spectral Line Half Width	$\Delta\lambda$	$I_F = 50\text{mA}$	—	40	—	nm

(Note 1) The direction of X, Y are in the following diagram.
The area with slash line describe emitting surface.




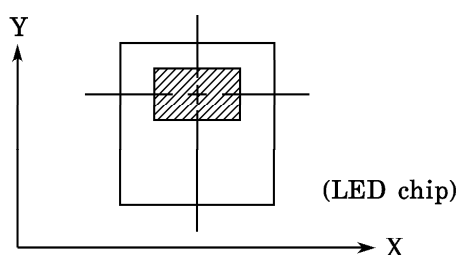


(Note 2) Luminous radiation output to effective angle ± 25 degree.

PRECAUTION

Please be careful of the followings.

1. Soldering temperature : 260°C MAX. Soldering time : 5 sec MAX.
(Soldering portion of lead : at above 1.5mm from the body of the device)
2. If the lead is formed, the lead should be formed at a distance of 2mm from the body of the device.
Soldering shall be performed after lead forming.

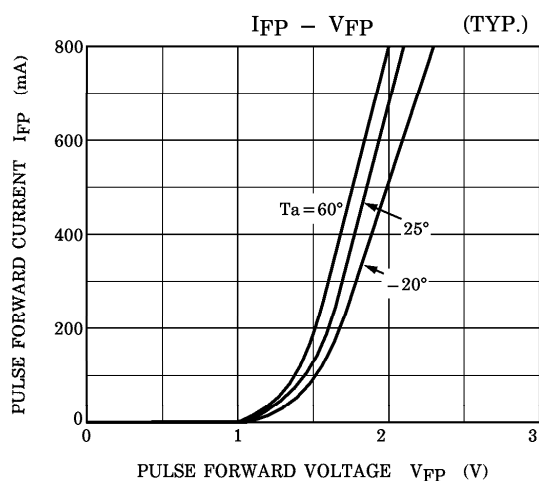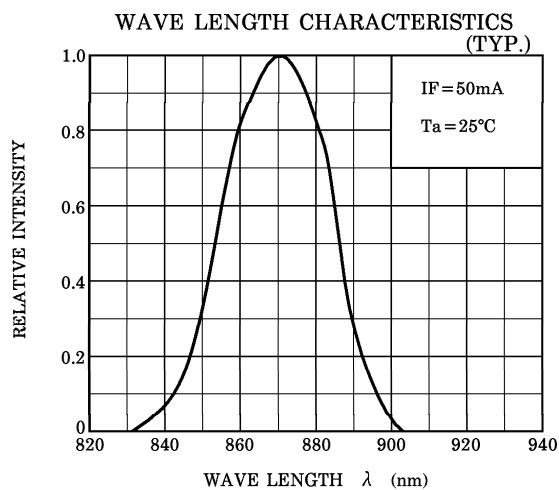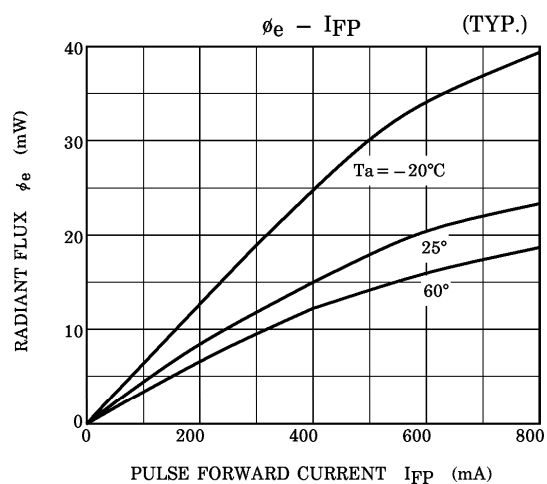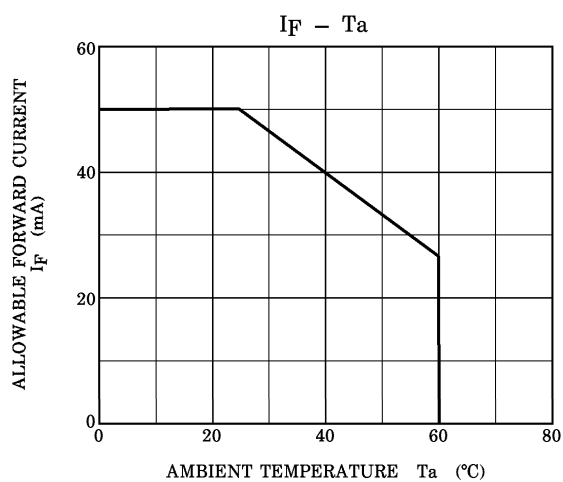

RADIATION PATTERN (TYP.)
 $T_a = 25^\circ\text{C}$

