


### Compact Peltier-cooling type

#### ■ FEATURES

- High optical power : 20 W/bar
- High stability
- Long life
- High cost performance
- Compact

#### ■ APPLICATIONS

- Pumping source for solid state lasers
- Materials processing
- Welding
- Soldering
- Medical systems

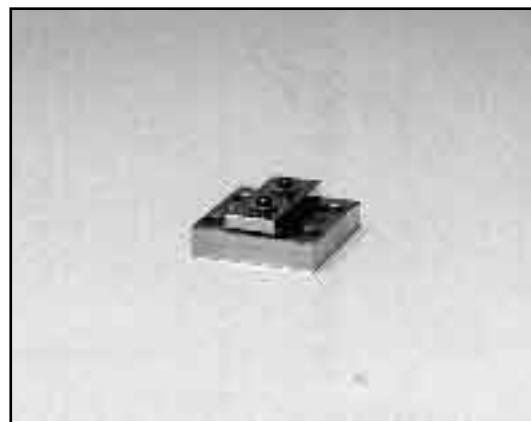

High power laser diodes with a Peltier cooler feature several advantages such as high stability with long life and high cost performance with compact structure. Since they are designed to be small, they are easily applied as light source to pump solid state lasers, for material processing like welding or soldering, and for medical systems. The lasing areas consist of small laser emitters arranged in line and are thus called “Bar” structure. By stacking Bars as a module, a high power CW operation can be achieved. Water-cooling and Furryu-cooling (patent pending : Japan 8-139479, WO 00/11717) are also available. And focusing lens is available as an option.

#### ■ ABSOLUTE MAXIMUM RATINGS (Each bar)

Parameter	Symbol	Value	Unit
Radiant Output Power / bar	$\Phi_e$	22	W
Reverse Voltage	$V_r$	2	V
Operating Temperature	$T_{op(c)}$	+5 to +35	°C
Storage Temperature	$T_{stg}$	-20 to +40	°C

#### ■ CHARACTERISTICS (Each bar, Top(c) = 20 °C)

Parameter	Symbol	Conditions	Value	Unit
Radiant Output Power / bar	$\Phi_e$	$I_f = 25$ A	20	W
Peak Emission Wavelength	$\lambda_p$	$\Phi_e = 15$ W	808	nm
Spectral Radiation Half Bandwidth	$\Delta\lambda$	$\Phi_e = 15$ W	4.0	nm
Forward Voltage	$V_f$	$\Phi_e = 15$ W	1.8	V
Beam Spread Angle : Parallel	$\theta_{//}$	FWHM	10	° (degree)
: Vertical	$\theta_{\perp}$		35	° (degree)
Lasing Threshold Current	$I_{th}$		10	A
Array Length	-		10	mm

\*Contact sales staff for emitting wave-length and radiant output power ( $\Phi_e$ ) other than above.

# HIGH POWER CW LASER DIODE with PELTIER-COOLING L8413

Figure 1: Radiant Output Power vs. Forward Current (Typ.)

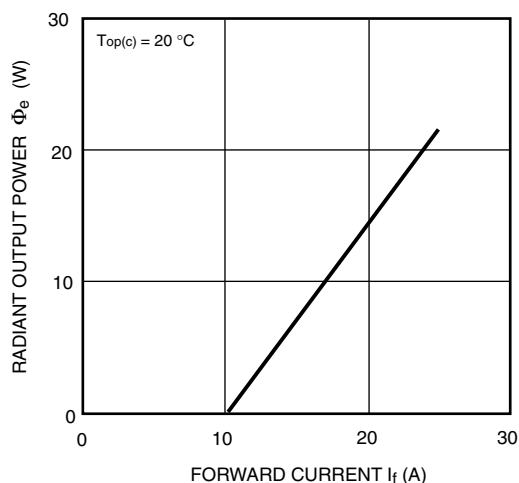


Figure 2: Typical Emission Spectrum


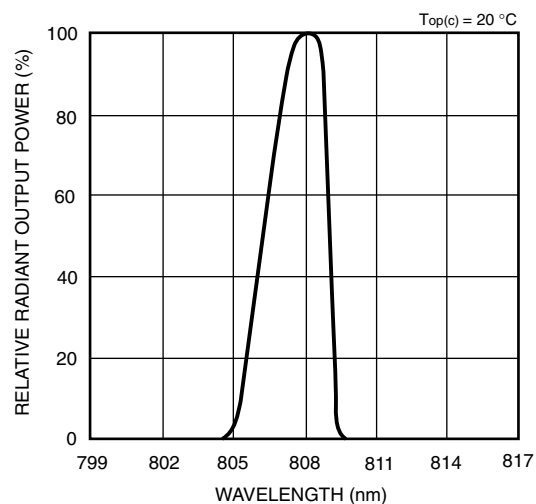


Figure 3: Dimensional Outline (Unit : mm)

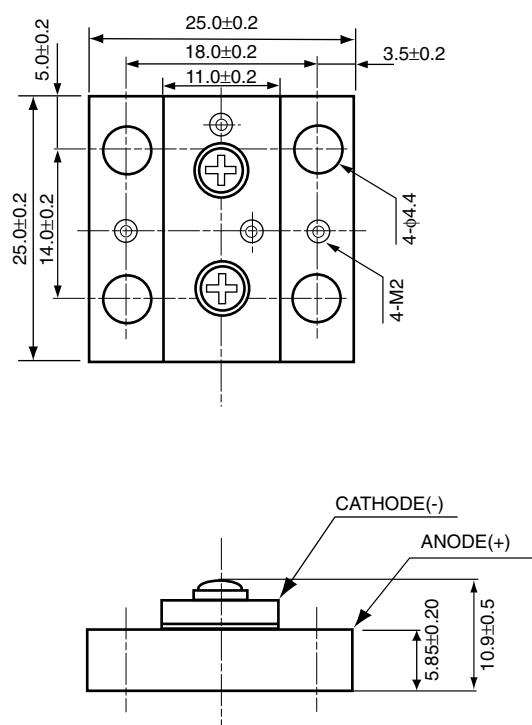

**HAMAMATSU**

<http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Laser Group, Sales Dept.

5000, Hirakuchi, Hamakita City, Shizuoka, 434-8601, Japan, Telephone: (81)53-584-0227, Fax: (81)53-584-0228, E-mail: laser-g@lsr.hpk.co.jp

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O. BOX 6910, Bridgewater, N.J. 08807-0910, U.S.A. Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trappu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33(1) 69 53 71 00, Fax: 33(1) 69 53 71 10, E-mail: info@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Twin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44)1707-294888, Fax: (44)1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 Solna, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741, E-mail: info@hamamatsu.it

Cat. No. LLD1007E02  
APR. 2002  
Printed in Japan (200)