

Peak Emission Wavelength 980nm, Radiant Output Power 1W (CW)

■ FEATURES

- Radiant output power (CW) : 1W
- Peak Emission Wavelength : 980 nm $\pm$ 3 nm
- Beam Area Size : 100 μ m x 1 μ m
- High stability
- Long life
- Compact

■ APPLICATIONS

- Medical instrument
- Measuring instrument
- Pumping source for solid state lasers (EDFA)



■ OUTLINE

A 980nm 1W Laser Diode has joined in the range of HAMAMATSU PHOTONICS's Single Chip Laser Diode. Emitting area size of L9418 series is 100 μ m, it makes easier to focus on to a small spot with optics. Therefore, it can be used for various applications such as medical instruments, measuring instruments, communication etc.

■ ABSOLUTE MAXIMUM RATINGS (Top(c) = 25 °C)

Parameter	Symbol	Value	Unit
Radiant Output Power	Φ_e	1.2	W
Forward Current	I_f	1.4	A
Reverse Voltage	V_r	2	V
Operating Temperature	$T_{op(c)}$	0~+30	°C
Storage Temperature	T_{stg}	-30~+80	°C

■ CHARACTERISTICS (Top(c) = 25 °C)

Parameter		Symbol	Conditions	Value	Unit
Radiant Output Power		Φ_e	$I_f = 1.2$ A	1 (Typ.)	W
Operating Current		I_{op}	$\Phi_e = 1$ W	1.2 (Typ.)	A
Peak Emission Wavelength		λ_p		980 $\pm$ 3	nm
Spectral Radiation Half Bandwidth		$\Delta\lambda$		2 (Typ.)	nm
Forward Voltage		V_f		1.6 (Typ.)	V
Beam Spread Angle	Parallel	$\theta_{//}$	$\Phi_e = 1$ W FWHM	8	degree
	Vertical	$\theta_{\perp}$		32	degree
Emitting Area Size		—	Value at designing	100 x 1	μ m
Lasing Threshold Current		I_{th}	—	0.24	A

CW LASER DIODES L9418

Figure 1: Radiant Output Power vs. Forward Current (Typ.)

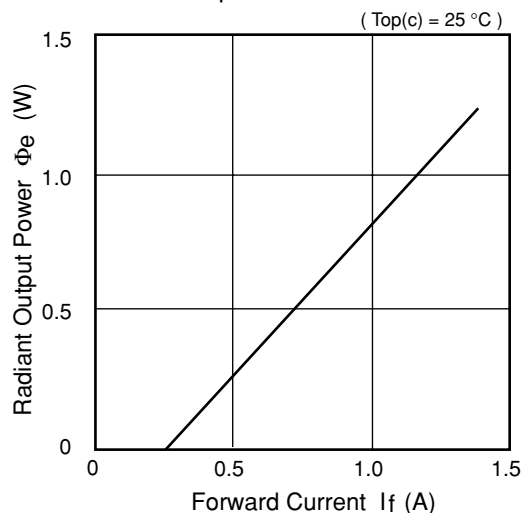


Figure 2: Emission Spectrum (Typ.)

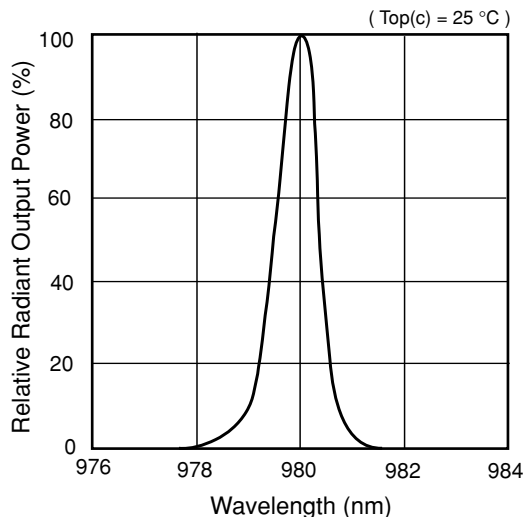


Figure 3: Directivity (Typ.)



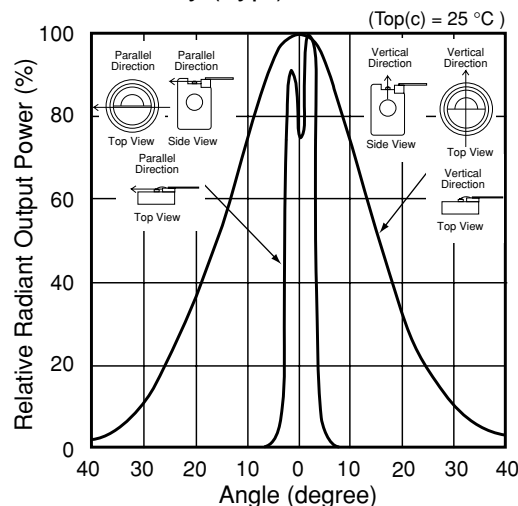


Figure 4: Dimensional Outline (Unit : mm)


1) L9418-04
φ 9.0 CD Package

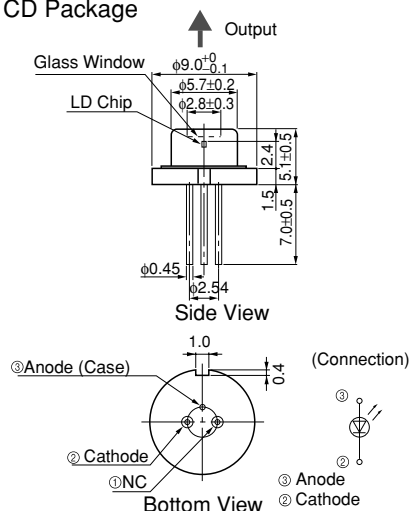

2) L9418-06
Side-out OHS Package

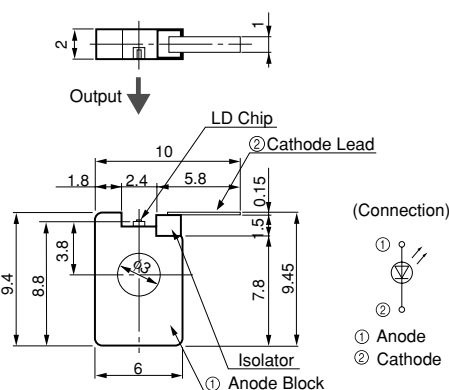

3) L9418-07
Head-out OHS Package

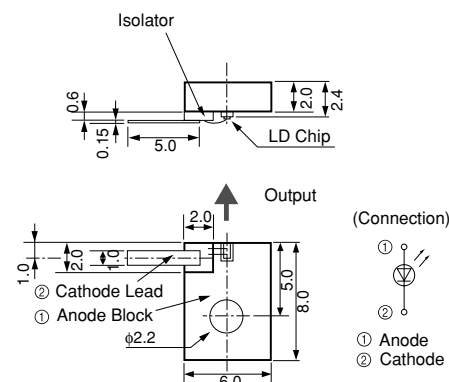

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Laser Group, Sales Dept.

5000, Hirakuchi, Hamakita City, Shizuoka, 434-8601, Japan, Telephone: (81)53-584-0227, Fax: (81)53-584-0228, E-mail: laser-g@lsr.hpk.co.jp

U.S.A.: Hamamatsu Corporation, 360 Foothill Road, P.O. BOX 6910, Bridgewater, N.J. 08807-0910, U.S.A. Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH, Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L., 8, Rue du Saule Trappu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33(1) 69 53 71 00, Fax: 33(1) 69 53 71 10, E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited, 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44)1707-294888, Fax: (44)1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB, Smidesv gen 12, SE-171-41 Solna, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.R.L., Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741, E-mail: info@hamamatsu.it

<http://www.hamamatsu.com>

Cat. No. LLD1013E01
JUL. 2003 HPK
Printed in Japan