


OS-5602

Actuator Type Opto Sensor

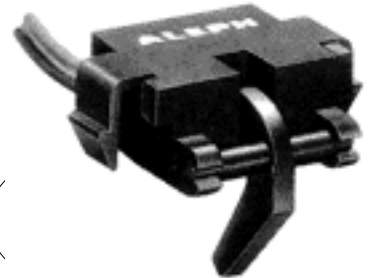

- Photo transistor output
- Selectable supply voltage with RF and RL resistor value (5V, 12V, 24VDC)
- Snap action mount
- Space saver (low profile)

MAXIMUM RATINGS (Ta=25°C)

<i>Item</i>		<i>Symbol</i>	<i>Value</i>
Input	Forward Current	IF	50mA
	Reverse Voltage	VR	5V
Output	C-E Voltage	VCEO	30V
	E-C Voltage	VECO	5V
	Collector Current	IC	50mA
	Collector Power Dissipation	PC	75mW

ELECTRICAL CHARACTERISTICS (Ta=25°C)

<i>Item</i>		<i>Symbol</i>	<i>Conditions</i>	<i>Min</i>	<i>Typ</i>	<i>Max</i>	<i>Unit</i>
Input	Forward Voltage	VF	IF=10mA	1.0	1.15	1.3	V
	Reverse Current	IR	VR=5V	-	-	10	μA
Output	Dark Current	ID	VCE=24V IF=0	-	5	100	nA
	Collector Current *1	IC	IF=20mA VCE=5V	2.0	5.0	-	mA
	Collector Leak Current *2	ICP	IF=20mA VCE=5V	-	-	50	μA
	C-E Saturation Voltage	VCE (Sat)	IF=20mA IC=1mA	-	0.15	0.4	V

*1 with actuator operated *2 with actuator released



MECHANICAL CHARACTERISTICS

<i>Item</i>	<i>Limits</i>
Operating Force	1g Max
Resistance to Vibration	10~55Hz, 1.5mm
Resistance to Shock	30G
Mechanical Life	10^6
Operating Temp.	-20° ~ +75°C
Storage Temp.	-25° ~ +90°C
Mounting Plate Thickness	$1 \pm 0.05\text{mm}$

RECOMMENDED RF and RL VALUE

<i>VCC</i>	<i>5V</i>	<i>12V</i>	<i>24V</i>
RF	200~470 ohms 1/4W	680~1.2K ohms 1/4W	1.2K~2.4K ohms 1/2W
RL	20K~47K ohms	20K~47K ohms	20K~47K ohms

Schematic/Typical Circuit

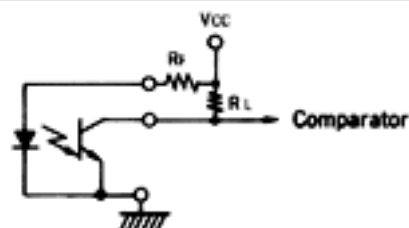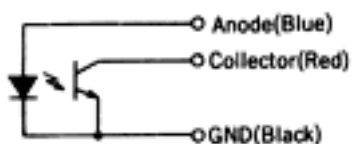

Technical drawing of a cross-shaped part with dimensions in mm. The part has a central square with rounded corners (4-R0.05) and four rectangular arms. Dimensions include overall width 21-0.2, overall height 21+0.2, arm width 15±0.2, and arm height 7.5. A thickness dimension $t = 1 \text{ mm}$ is shown below the drawing.


Dimensions in mm
 (1 mm = 0.0394 inches)

<http://www.ceejay.com/aleo47.html> (第 3/4 页) 2005-5-5 20:49:58

Standard Terms: Check/Money Order
Net 30
Credit Card

Minimum Order: \$100.00

Wholesale/OEM



Distributed by

CeeJay ■ 16475 Canyon Hills Road #3 ■ Chino Hills, California 91709

Tel: (714) 572-2169 ■ Fax: (714) 572-2169 ■ E-mail: sales@ceejay.com

© Copyright 1997 - 2004, CeeJay
All rights reserved.

